

Power Semiconductor Selection Guide

A comprehensive portfolio of power semiconductor technologies in industry standard and innovative packages

Table of Contents

About this guide

This selection guide offers a comprehensive look at the breadth and depth of the Littelfuse power semiconductor and control IC portfolio. From milliwatt to gigawatt system solutions and everything in between, we've got the devices that meet your needs.

Featured Packages	4	Power Semiconductor Chips	87
PressFit-Pin.....	4	Power Modules	88
High Voltage Discrete	5	Rectifier & IGBT Module Nomenclature	88
ISO.....	9	Rectifier Modules	89
SMPD & ISOPLUS.....	11	Technology Overview	89
MOSFET	16	Diode Modules – Single and Dual.....	90
Nomenclature & Technology Overview.....	16	Thyristor / Diode Modules	93
Trench	19	Thyristor Modules – Single and Dual	96
Very High Voltage.....	23	Bridges with Fast Diodes	101
Polar™	24	Single-Phase	102
Legacy (Standard)	31	Three-Phase.....	104
Ultra Junction	32	AC Controller, TRIAC	109
Q-Class	38	High Voltage.....	109
Silicon Carbide	39	Braking Rectifier Assemblies.....	109
Linear.....	40	IGBT Modules	110
Depletion-mode.....	42	Technology Overview	110
P-Channel	44	High-Power Devices	112
IGBT	46	Nomenclature	112
Nomenclature & Technology Overview.....	46	Rectifier Diodes	114
XPT™	50	Fast Recovery Diodes.....	119
Very High Voltage.....	58	Soft Recovery Diodes	121
Reverse Conducting (BiMOSFET).....	59	Extra Fast Recovery Diodes	124
Diodes	60	Sonic FRDs.....	125
Technology Overview	60	Phase Control Thyristors	126
Schottky.....	61	Medium Voltage Thyristors	134
Ultrafast.....	66	Distributed Gate Thyristors	136
HiPerDyn™ FREDs	67	Single Pre-Mounted.....	141
SiC Schottky	67	Press-Pack IGBTs	142
HiPerFRED™	68	Gate Drive Units	143
SONIC-FRD™	71	Stacks and Accessories	144
FRED	72	Technology Overview	144
SemiFast.....	74	Modular Solutions.....	146
FRED & HiPerFRED™ Modules.....	74	Bar Clamps	150
Rectifier	75	Box Clamps	154
Breakover Diodes	78	Heatsinks.....	154
Thyristors	80	Coolers	155
Phase Control	80	Outline Drawings	156
SCR.....	82	Part Number Alphanumeric Index	218
TRIAC	84		
Quadrac	86		
SIDAC	86		



Proudly presenting world-class **power semiconductor and IC technologies, quality, and customer support.**

Littelfuse: Everywhere, Every Day

Founded in 1927, Littelfuse is a diversified industrial technology manufacturing company empowering a sustainable, connected, and safer world. Across more than 20 countries, and with approximately 18,000 global associates, we partner with customers to design and deliver innovative, reliable solutions.

Littelfuse offers an extensive technology portfolio - fuses, semiconductors, polymers, ceramics, relays, sensors, switches, and more. Serving over 100,000 end customers, our products are found in a variety of industrial, transportation, and electronics end markets—everywhere, every day.

Why Choose Littelfuse

Our history of innovation, combined with our customer-first culture, drives us to collaborate with you to develop safer, more reliable products that are energy efficient and compliant with global regulations. We will partner with you to solve complex problems wherever electrical energy is used, bringing design, engineering, and technical expertise to deliver business results.

Complementing our wide portfolio of products is a global network of design and technical support expertise. We offer decades of design experience to help you address application challenges and achieve regulatory compliance.

Your Single Source

Littelfuse offers an extensive power semiconductor product line. We design forward-thinking, application-specific solutions to provide assurance that your most demanding requirements will be met. Our goal is to provide the most complete range of options so you will not have to compromise.

Testing Support

Littelfuse can help ensure that your products withstand most common threats repeatedly and fail safely under extreme circumstances. We can serve as an independent source to provide assistance as you design, by offering lab testing capabilities for customer applications. This testing includes industry-specific required power fault and electrostatic discharge (ESD) / electrically fast transients (EFT) / lightning surge conditions.

Application Knowledge

For over 97 years, engineers and designers around the world have relied on Littelfuse products and application knowledge to support their designs.

Global Support

Littelfuse stays close to customers. With manufacturing, lab, and design facilities located around the globe, application knowledge and technical support are locally available. Also, we offer a network of regional customer support offices and hundreds of independent authorized distributor contacts to assist you.

Visit [Littelfuse.com/contact-us](https://www.littelfuse.com/contact-us) to find local support near you.

Operational Excellence

With our global manufacturing footprint, Littelfuse is firmly committed to manufacturing quality products at a competitive price. We build quality into our products and services, striving for zero defects in everything we do, thereby reducing cost and increasing your total satisfaction. We strive to exceed expectations every day.

Quality Assurance

Our global manufacturing facilities abide by strict quality assurance requirements and hold the following quality management system registrations:

- ISO 9001
- ISO14001
- IATF 16949

Featured Packages

PressFit-Pin for E2, E3, and SimBus F Module Packages


Littelfuse presents new Littelfuse PressFit-Pin technology for E2 and E3 module packages. Modules equipped with these pins can be connected to the PCB without soldering. For the pressing process, either hand tools or pressing machines can be used. The benefits of the assembly are as follows:

- Simplified process
- Reduced mounting time
- No risk of bad solder contacts
- Reduced aging of pin contact
- No thermal stress for the PCB assembly
- Press-out is possible for maintenance


The pin concept is based on the proven “Bizon-pin” concept. The pressing process is a plastic deformation of pin and via of the board, ending in a cold welding. The pin features are as follows:

- Pin qualification according to IEC 60352-5
- High conductive Cu alloy with Ni gal. tin surface
- Very low contact resistance
- Low press-in force per pin; PCB hole diameter has independent press-out force
- Littelfuse PressFit-Pins are compatible to market standards


A Close Look at the PressFit-Pin Technology

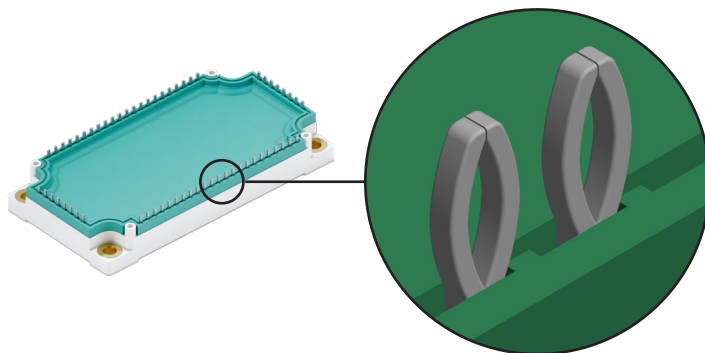


Start with the Following Module Types:



E2



E3



SimBus F

Board and Via Requirements E2 and E3


Parameter	Min.	Typical	Max.
Drill hole diameter	–	2.35 mm	–
Final hole diameter	2.14 mm	2.20 mm	2.29 mm
Cu thickness inside the hole	>25 µm	–	–
Sn thickness inside the hole	–	–	<15 µm
Cu thickness for PCB tracks	35 µm	70 µm 105 µm	–
PCB thickness	1.60 mm	2.00 mm	–
Metallization PCB	chem. tin	–	–

Board and Via Requirements SimBus F

Parameter	Min.	Typical	Max.
Drill hole diameter	–	1.16 mm	–
Final hole diameter	1.00 mm	1.05 mm	1.10 mm
Cu thickness inside the hole	>25 µm	–	–
Sn thickness inside the hole	–	–	<15 µm
Cu thickness for PCB tracks	35 µm	70 µm 105 µm	–
PCB thickness	1.60 mm	2.00 mm	–
Metallization PCB	chem. tin	–	–

High Voltage TO-252 (D-Pak) Package

Creepage (min): pin/pin: ≥ 3.6 mm
pin/Cu back-side: ≥ 2.5 mm



X004a
TO-252AA

Part Number	Technology	Config.	V _{RRM}	I _{FAV} / I _D @ T _C	
			V	A	°C
Diode					
DMA10IM1200UZ	Standard Diode	Single	1200	10	150
DMA10IM1600UZ	Standard Diode	Single	1600	10	150
DMA10P1200UZ	Standard Diode	Phase Leg	2 × 1200	10	150
DMA10P1600UZ	Standard Diode	Phase Leg	2 × 1200	10	150
Sonic Diode					
DHG10IM1800UZ	Fast Recovery Diode	Single	1800	10	100
MOSFET					
IXTY1R4N120PHV	Standard MOSFET	Single	1200	1.4	25

High Voltage TO-263 (D²-Pak) Package

Creepage (min): pin/pin: ≥ 4.2 mm
pin/Cu back-side: ≥ 4.7 mm




X011c
TO-263ABHV

Part Number	Technology	Config.	V _{RRM}	I _{FAV} / I _D @ T _C	
			V	A	°C
Diode					
DMA10IM1600PZ	Standard Diode	Single	1600	10	150
DMA30IM1600PZ	Standard Diode	Single	1600	30	140
DNA30E2200PZ	Standard Diode	Single	2200	30	140
DNA30EM2200PZ	Standard Diode	Single	2200	30	140
DMA10P1600PZ	Standard Diode	Phase Leg	2 × 1800	10	150
DMA10P1800PZ	Standard Diode	Phase Leg	2 × 1800	10	150
DAA10EM1800PZ	Avalanche Diode	Single	1800	10	150
DAA10P1800PZ	Avalanche Diode	Phase Leg	2 × 1800	10	150
FRED / HiPerFRED					
DSEI12-12AZ	FRED	Single	1200	11	100
DSEP12-12AZ	HiPerFRED	Single	1200	12	135
DSEP12-12BZ	HiPerFRED	Single	1200	15	130
SiC Diodes					
DCK20I1200PC	Schottky Barrier Diode	Single	1200	20	135

Featured Packages

High Voltage TO-263 (D²-Pak) Package

Creepage (min): pin/pin: ≥ 4.2 mm
pin/Cu back-side: ≥ 4.7 mm



X011c
TO-263ABHV


Part Number	Technology	Config.	V _{RRM}	I _{FAV} / I _D @ T _C	
			V	A	°C
Thyristor					
CLA5E1200PZ	High Efficiency SCR	Single	1200	5	135
CLA15E1200NPZ				15	120
CLA30E1200NPZ	High Efficiency SCR	Single	1200	30	115
CLB30I1200PZ				30	115
CLA40E1200NPZ	High Efficiency SCR	Single	1200	40	125
CLB40I1200PZ				40	125
CMA20E1600PZ	Standard Thyristor	Single	1600	20	115
CMA30E1600PZ				30	115
CME30E1600PZ	Fast Thyristor	Single	1600	30	80
Triac					
CLA30MT1200NPZ	High Efficiency	Triac	1200	15	120
CLA40MT1200NPZ				20	115

Part Number	Technology	Config.	V _{CES}	I _{C25}	V _{CE(sat)}
			V	A	V
IGBT & BiMOS™					
IXA4IF1200UC	XPT™ IGBT	Copack	1200	9	1.8
IXYA20N120C3HV	Fast XPT™ IGBT	Single	1200	40	3.4
IXYA20N120A4HV	Gen4 XPT™ IGBT	Single	1200	80	1.7
IXYA20N120B4HV				76	1.8
IXYA20N120C4HV	Gen4 XPT™ IGBT	Single	1200	68	2.1
IXYA30N120A4HV				106	1.6
IXYA8N250CHV	High Voltage XPT™ IGBT	Single	2500	29	3.4
IXYA12N250CHV				28	3.7
IXBA16N170AHV	High Voltage BiMOS™	Single	1700	16	6
IXBA10N300HV	High Voltage BiMOS™	Single	3000	34	2.8
IXBA14N300HV				38	2.7

Part Number	Technology	Config.	V _{DSS}	I _{D25}	R _{DSon} max.
			V	A	mΩ
MOSFET					
IXFA8N85XHV	X-Class HiPerFET™	Single	850	8	0.85
IXFA14N85XHV				14	0.55
IXFA20N85XHV				20	0.33
IXTA08N100D2HV	Depletion Mode MOSFET	Single	1000	0.8	21
IXTA3N100D2HV				3	6
IXTA3N120HV	High Voltage MOSFET	Single	1200	3	4.5
IXTA3N150HV	High Voltage MOSFET	Single	1500	2	7.3
IXTA4N150HV				4	6
IXTA1N200P3HV	High Voltage MOSFET	Single	2000	1	40
IXTA02N250HV		Single	2500	0.2	450

High Voltage TO-268 (D³-Pak) Package

Creepage (min): pin/pin: ≥ 9.4 mm
pin/Cu back-side: ≥ 5.6 mm




X019a
TO-268HV

Part Number	Technology	Config.	V _{CES} /V _{DSS}	I _{C25} /I _{D25}	V _{CE(sat)} typ.	R _{DSon} Max
			V	A	V	mΩ
IGBT						
IXYT30N65C3H1HV	Gen3™ XPT™ IGBT	Single	650	60	2.7	–
IXYT20N120C3D1HV			1200	36	3.4	–
IXYT40N120A4HV	Gen4™ XPT™ IGBT	Single	1200	150	1.8	–
IXYT55N120A4HV				175	1.5	–
IXYT85N120A4HV				300	1.5	–
IXYT12N250CV1HV	High Voltage XPT™ IGBT	Single	2500	28	3.7	–
IXYT25N250CHV				95	4	–
IXYT30N450HV	High Voltage XPT™ IGBT	Single	4500	60	3.9	–
IXBT16N170AHV	High Voltage BiMOS™	Single	1700	16	6	–
IXBT22N300HV			3000	60	2.7	–
IXBT32N300HV	High Voltage BiMOS™	Single	3000	80	2.8	–
IXBT42N300HV				104	3	–
IXBT16N360HV	High Voltage BiMOS™	Single	3600	48	2.5	–
IXBT20N360HV				70	3.4	–
MOSFET						
IXTT140N075L2HV	Linear MOSFET	Single	75	140	–	11
IXTT44N25L2HV			250	44	–	75
IXFT26N100XHV	X–class HiPerFET™	Single	1000	26	–	320
IXFT32N100XHV				32	–	220
IXTT34N65X2HV	X2–class MOSFET	Single	650	34	–	96
IXFT60N65X2HV	X2–class HiPerFET™	Single	650	60	–	52
IXFT80N65X2HV				80	–	38
IXFT30N85XHV	X2–class HiPerFET™	Single	850	30	–	230
IXFT40N85XHV				40	–	145
IXFT50N85XHV				50	–	105
IXFT140N20X3HV	X3–class HiPerFET™	Single	200	140	–	96
IXFT180N20X3HV				180	–	75
IXFT220N20X3HV				220	–	62
IXFT120N25X3HV	X3–class HiPerFET™	Single	250	120	–	120
IXFT150N25X3HV				150	–	90
IXFT170N25X3HV				170	–	74
IXFT100N30X3HV	X3–class HiPerFET™	Single	300	100	–	135
IXFT120N30X3HV				120	–	110
IXFT150N30X3HV				150	–	83
IXTT240N15X4HV	X4–class MOSFET	Single	150	240	–	4.4
IXTT4N150HV	High Voltage MOSFET	Single	1500	4	–	6
IXTT12N150HV				12	–	2
IXTT3N200P3HV	High Voltage MOSFET	Single	2000	3	–	8
IXTT1N250HV			2500	1.5	–	40
IXTT1N300P3HV	High Voltage MOSFET	Single	3000	1	–	50
IXTT2N300P3HV				2	–	21
IXTT02N450HV	High Voltage MOSFET	Single	4500	0.2	–	625
IXTT1N450HV				1	–	80

Featured Packages

High Voltage TO-268 (D³-Pak) Package


Creepage (min): pin/pin: ≥ 9.4 mm
pin/Cu back-side: ≥ 5.6 mm




X019a
TO-268HV

Part Number	Technology	Config.	V _{RRM}	I _{DAV} /I _{TAV} @ T _C	
			V	A	°C
Rectifier					
DSEI120-12AZ	FRED	Single	1200	109	60
DSEP60-12AZ	HiPerFRED	Single	1200	60	115
DSEP90-12AZ	HiPerFRED	Single	1200	90	105
DSP45-12AZ	Standard Diode	Phase leg	2 × 1200	45	130
DSP45-16AZ			2 × 1600	45	130
DLA100IM1200TZ	Standard Diode	Phase leg	1200	100	105
Thyristor					
CMA50E1600TZ	Standard Thyristor	Single	1600	50	110
CLA60MT1200NTZ	High Efficiency	Triac	1200	30	120
CLA100E1200TZ	Standard Thyristor	Single	1200	100	105
CNE60E2200TZ	High Voltage Thyristor	Single	2200	60	80

High Voltage TO-247HV and PLUS247HV Packages



X14c
TO-247HV



X015c
PLUS247HV

Part Number	Technology	V _{CES} /V _{DSS}	I _{C25} /I _{D25} (I _{C100})	V _{CE(sat)} typ.	w /Diode	R _{DS(on)} max.	Package	
		V	A	V		mΩ		
IGBT								
IXYH8N250CHV	XPT™ IGBT	2500	(8)	4	—	—	TO-247HV	
IXYH8N250CV1HV			(8)	4	●	—		
IXYH12N250CHV			(12)	4.5	—	—	TO-247HV	
IXYH12N250CV1HV			(12)	4.5	●	—		
IXYH16N250CV1HV			(16)	4	●	—	TO-247HV	
IXYH25N250CHV			(25)	4	—	—		
IXYX25N250CV1HV			(25)	4	●	—	PLUS247HV	
IXYX40N250CHV			(40)	4	—	—		
IXYH30N450HV			4500	(30)	3.9	—	—	TO-247HV
IXYX40N450HV				40	3.9	—	—	PLUS247HV
IXBH10N300HV	BiMOSFET™	3000		34	2.8	—	—	TO-247HV
IXBH14N300HV			38	2.7	—	—		
IXBH22N300HV			60	2.7	—	—	TO-247HV	
IXBX28N300HV			62	2.7	—	—	PLUS247HV	
IXBH32N300HV			(32)	2.8	—	—	TO-247HV	
IXBH42N300HV			(42)	2.5	—	—		
IXBH16N360HV			3600	48	2.5	—	—	TO-247HV
IXBH20N360HV				70	3.4	—	—	
IXBX50N360HV	125	2.9		—	—	PLUS247HV		
MOSFET								
IXTH02N450HV	MOSFET	4500	0.2	—	—	625	TO-247HV	
IXTH1N450HV			1	—	—	80		
IXTX1R4N450HV	MOSFET	4500	1.4	—	—	40	PLUS247HV	
IXTH1N200P3HV	Polar 3 MOSFET	2000	1	—	—	40	TO-247HV	
IXTH3N200P3HV			3	—	—	8		
IXTX6N200P3HV	Polar 3 MOSFET	2000	6	—	—	4	PLUS247HV	
IXTH05N250P3HV	Polar 3 MOSFET	2500	0.5	—	—	110	TO-247HV	
IXTH04N300P3HV	Polar 3 MOSFET	3000	0.4	—	—	190	TO-247HV	
IXTH1N300P3HV			1	—	—	50		
IXTH2N300P3HV			2	—	—	21		
IXTX4N300P3HV	Polar 3 MOSFET	3000	4	—	—	12.5	PLUS247HV	

Isolated Discrete Packages

ISOPLUS247™ is the Direct Copper Bond (DCB) - isolated version of the PLUS247™ package, TO-247 without a mounting hole. The design of this patented package is revolutionary: the silicon chip is soft soldered onto a DCB substrate instead of the usual copper lead frame. The DCB ceramic, which is the same substrate material used in high-power modules, provides not only a high isolation capability of 2500 V_{RMS} but also unbeatable low thermal resistance compared to conventional, externally mounted isolation materials.

Advantages:

- Isolation capability from leads to backside of 2500 V_{RMS} – no external isolation foil needed
- Thermal resistance from junction to case only slightly higher than for non-isolated versions
- Increased power and temperature cycling capability
- DCB can be patterned like printed circuit boards to allow special functions to be realized

While the junction-to-case thermal resistance is higher than that of an equivalent non-isolated device, what really matters is the total thermal resistance from junction-to-heatsink (R_{thJH}). After comparing a device in ISOPLUS247™ to its companion in the non-isolated package with an external isolation foil, the overall R_{th} was found to be lower for the ISOPLUS247™ package.

Due to the matched thermal expansion coefficients of silicon and DCB ceramic, mechanical stress to the die and solder caused by power and temperature cycling is reduced, improving reliability. Mounting is done with clips; this not only saves time but also guarantees constant pressure over the lifetime of the assembly.

Parts in the ISOPLUS247™ housing can be identified by the letter “R” in the Littelfuse part number. Potentially, all devices now encapsulated in TO-247, TO-264, and PLUS247™ housings can be molded in the ISOPLUS247™. There are already more than 100 types of ISOPLUS247™ available.

Another interesting feature is the capability to pattern the DCB substrate like a printed circuit board. Now, additional special functions can be realized, e.g., the series connection of single diode chips within one package.


ISOPLUS220™, ISOPLUS247™, and ISOPLUS264™ are the DCB-based substitutes for the corresponding standard packages.

A larger version of this packaging technology is the ISOPLUSi4-PAC™, which has up to five terminal pins, making it possible to create full diode bridges, phase-leg transistor configurations, buck and boost converters, and much more within one isolated discrete package.

ISOPLUS-DIL™ 37.5 mm long and 25 mm wide provides the largest mounting area in the ISOPLUS™ family. It is available in 2 pin out version: “GWM” configuration with polar power pins for 300 A_{RMS} on one side, 12 control pins on the opposite side, and the “GMM” configuration with 12 pins on either side. The package is intended for high-current low voltage applications as either a single switch or a 6-pack. With its high power density and reliability, ISOPLUS-DIL™ is recommended for use in automotive designs.


ISOPLUS-SMPD™ is a member of the Littelfuse ISOPLUS™ family and provides an increased creepage distance between pins to DCB.

Package Cross-Section

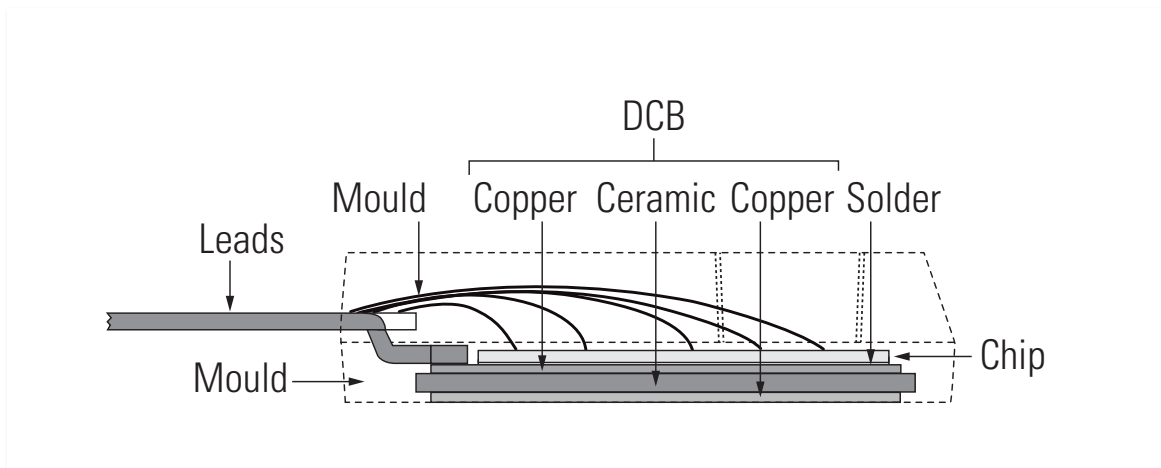


Featured Packages

ISO247™ Package



X016c
ISO247™




ISO247-4L

Part Number	Technology	Config.	V _{RRM}	I _{DAV} /I _{TAV} @ T _C	
			V	A	°C
Diode					
DSA90C200HR	Schottky Diode	Common Cathode	200	2 × 45	145
DPF30P600HR	HiPerFRED	Phase Leg	2 × 600	30	130
DMA10P1200HR	Standard	Phase Leg	2 × 1200	10	145
DMA10P1600HR			2 × 1600	10	145
DMA30P1600HR	Standard	Phase Leg	2 × 1600	30	105
DMA50P1200HR			2 × 1200	50	105
Thyristor					
CLA40E1200HR	High Efficiency	Single	1200	40	95
CMA40E1600HR	Standard	Single	1600	40	90
CLA60MT1200NHR	High Efficiency	Triac	1200	30	100
CLA80MT1200NHR				40	100
CMA60MT1600NHR	Standard	Triac	1600	30	90
CMA80MT1600NHR				40	95

Part Number	Technology	Config.	V_{CES}/V_{DSS}	I_{C25}/I_{D25}	$V_{CE(sat)}$ typ.	$R_{DS(on)}$ max.
			V	A	V	mΩ
IGBT						
ITF48IF1200HR	Fast Trench IGBT	Copack	1200	72	2.4	–
MOSFET						
IXFJ26N50P3	Polar3™ HiperFET™	Single	500	14	–	0.265
IXFJ80N25X3	X3-Class HiPerFET™	Single	250	44	–	0.018
IXFJ20N85X			850	9.5	–	0.36
IXTJ4N150	High Voltage MOSFET	Single	1500	2.5	–	6
IXTJ6N150				3	–	3.85
SiC MOSFET						
IXSJ80N120R1	SiC MOSFET	Single	1200	80	–	18
IXSJ43N120R1				43	–	36
IXSJ25N120R1				25	–	62
IXSJ80N120R1K		Single, K-source		80	–	18
IXSJ43N120R1K				43	–	36
IXSJ25N120R1K				25	–	62

Features and Benefits


- Electrical isolation of 2500 V
- Low thermal resistance
- Increased power & temperature cycling
- Saves PCB mounting area
- Replaces multiple discretes
- Reduces parasitic inductance & capacitance
- Reduces EMI
- Improved heat spreading

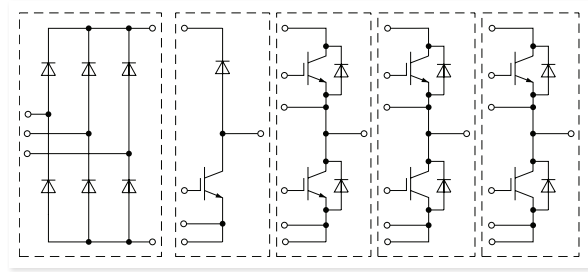


IGBTs




X031a
SMPD-X



X031b
SMPD-Y




B



F

Part Number	Circuit Diagram/Technology		V _{ce}	I _{C25} T _C = 25 °C	V _{CE(sat)} typ. T _C = 25 °C	E _{off} typ. T _J = 150 °C (125 °C)	Package
			V	A	A	mJ	
Single and Copack							
MMIX1Y82N120C3H1	B	XPT™ fast & Sonic	1200	78	2.9	(3.7)	SMPD-X
Full-Bridge							
MMIX4B22N300	F	IGBT for cap discharge	3000	38	3.1 max	-	SMPD-Y


MOSFETs




X030a
SMPD-B



X031a
SMPD-X




A




B

Part Number	Circuit Diagram/Technology		V _{DS}	I _{D25}	R _{DS(on)} max.	Q _g	Package
			V	A	mΩ	nC	
Single and Copack							
MMIX1T600N04T2	A	Trench2	40	600	1.3	590	SMPD-X
MMIX1F520N075T2	A	Trench2 HiPerFET™	75	500	1.6	545	
MMIX1F420N10T	A	Trench HiPerFET™	100	334	2.6	670	
MMIX1T500N20X4	A	X4-class Power MOSFET	200	480	1.99	535	
Phase-Leg							
MXB140P200LB	B	X4-class Power MOSFET	200	140	5.9	157	SMPD-B

SiC MOSFETs



X030a
SMPD-B




Phase-Leg

Part Number	V_{DSS}	I_b $T_C = 25\text{ }^\circ\text{C}$	I_{D80} $T_C = 80\text{ }^\circ\text{C}$	$R_{DS(on)}$ typ. $T_J = 25\text{ }^\circ\text{C}$	C_{iss} typ.	Q_g typ.	R_{thJC}	Package
	V	A	A	mΩ	pF	nC	K/W	
MCL10P1200LB	1200	16	11	160	890	50	2.30	SMPD-B

Featured Packages

Diodes & Thyristors




X030a
SMPD-B




X031a
SMPD-X




X032
MiniSMPD




G




I




K



H



J



M

Part Number	Circuit Diagram/Technology		V _{RRM}	I _{D(AV)M} @ T _C		Package
			V	A	°C	
Dual						
DSA120X150LB	G	Schottky	150	2 × 60	150	SMPD-B
DSA120X200LB	G	Schottky	200	2 × 60	150	SMPD-B
DSA240X200LB	G	Schottky		2 × 120	150	
DCG40X1200LB	G	SiC	1200	2 × 14.5	80	SMPD-B
1 Phase Bridge						
DPG60B600LB	H	HiPerFRED	600	60	110	SMPD-B
DCG20B650LB	H	SiC	650	21	80	
DLA100B800LB	H	Rectifier	800	124	80	SMPD-B
DMA120B800LB	H	Rectifier		130	90	
DLA100B1200LB	H	Rectifier	1200	124	80	SMPD-B
DHG40B1200LB	H	Sonic		34	80	
3 Phase Bridge						
DHG60U1200LB	I	Sonic	1200	62	80	SMPD-B
DMA90U1800LB	I	Rectifier	1800	99	80	

Thyristors and Triacs

Part Number	Circuit Diagram/Technology		V _{RRM}	I _{TAV} @ T _C		Package
			V	A	°C	
Dual						
CLA60MU1200LB	2 × J	Triac	1200	2 × 30	100	SMPD-B
Phase-Leg						
CMA50P1600LB	K	Thyristor	2 × 1600	50	90	SMPD-B

MOS-Gated Thyristors


Part Number	V_{DM}	I_{TSM} 1μs $T_C = 25^\circ C$	I_{TSM} 10μs $T_C = 25^\circ C$	r_T typ.	V_T Max.	$Q_{g(on)}$ typ.	t_{fi} typ. $T_C = 25^\circ C$	$V_{GK(th)}$ max.	Circuit Diagram	Package
	V	kA	kA	mΩ	V	nC	ns	V		
MMIX1H60N150V1	1500	32	11.8	1.2	6	180	100	5	M	SMPD-X

Potential Application Block Diagram Exmple (for i4-PAC™)


3, 4, and 5 leaded packages for various circuit topologies and DCB base plate

- Electrical isolation of 2500 V
- Low thermal resistance
- Increased power and temperature cycling
- Saves PCB mounting area
- Replaces multiple discretes
- Reduces parasitic inductance and capacitance
- Reduces EMI
- Less weight


-----> Solutions offered by Littelfuse
 —————> System implementation options

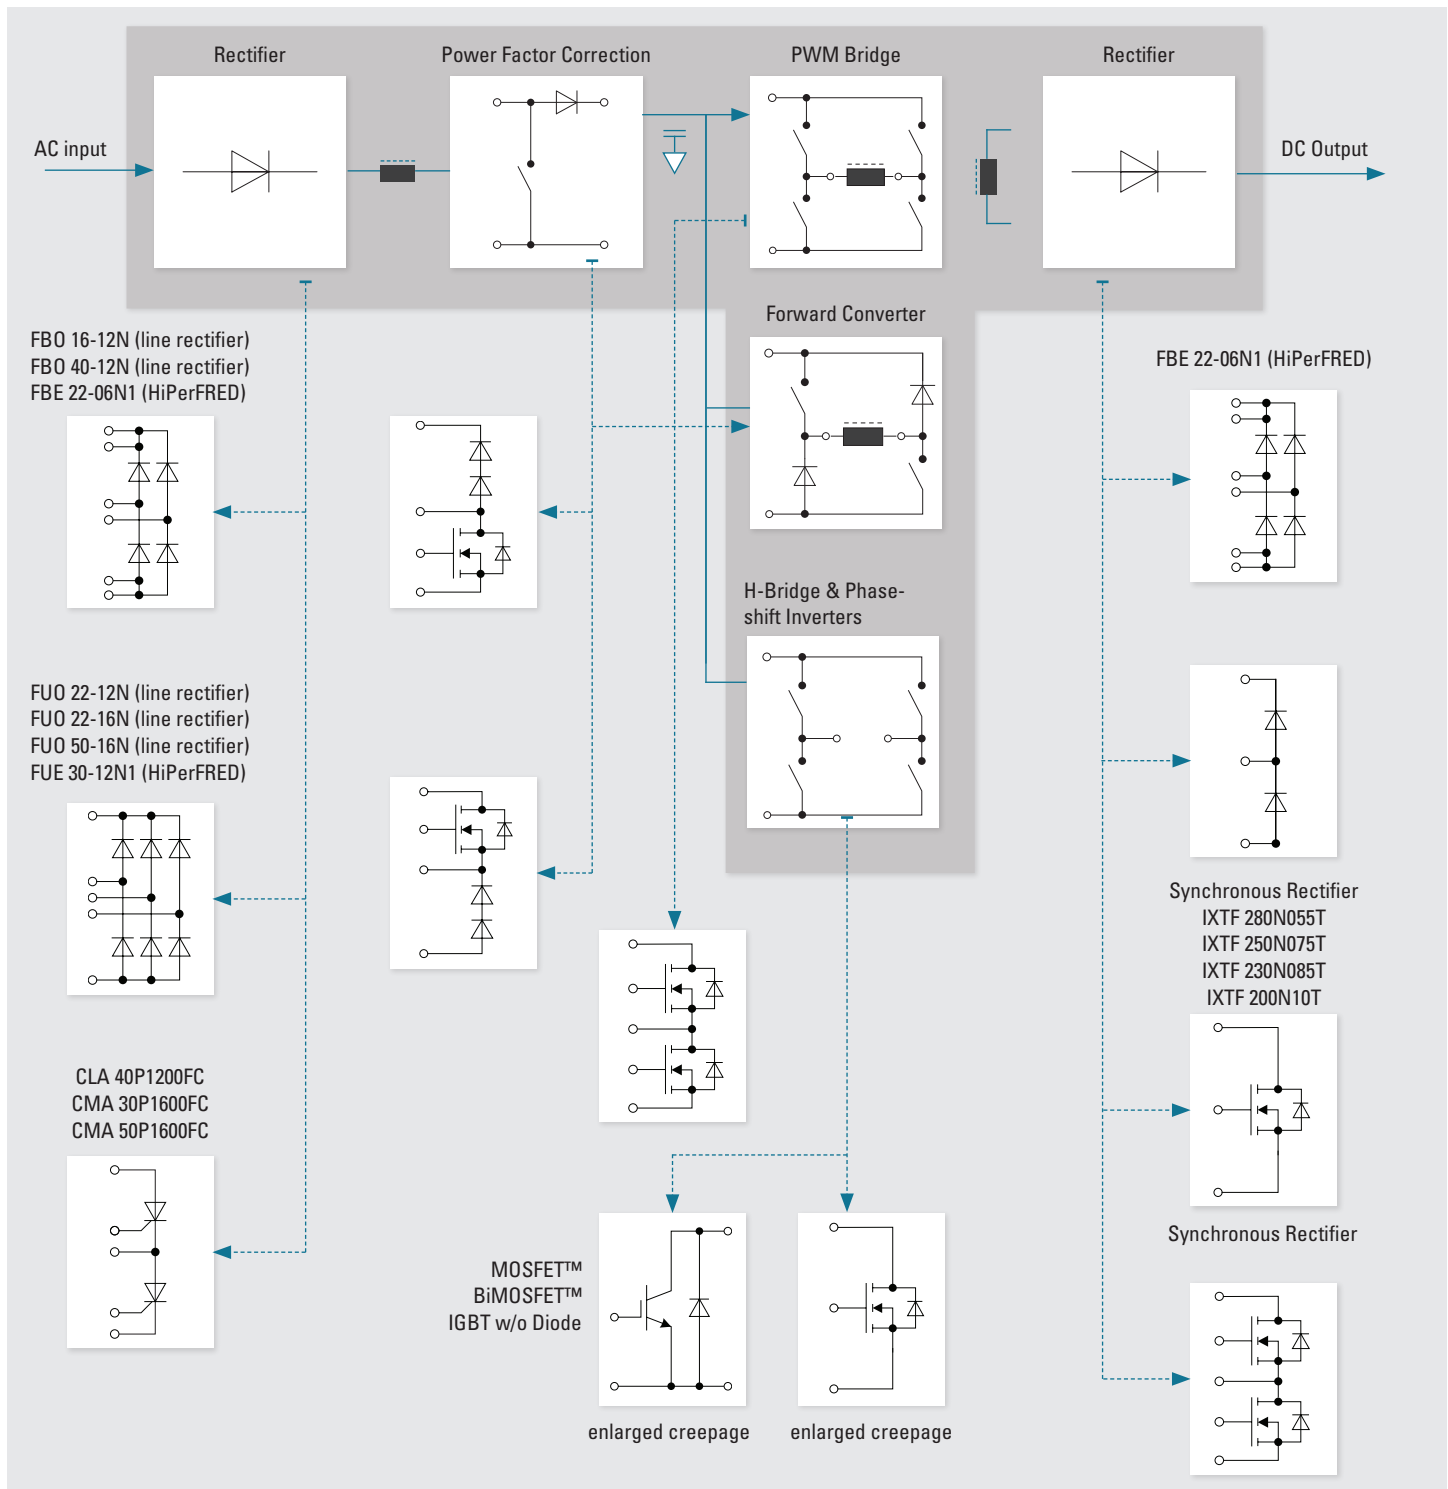


Featured Packages




X024a
ISOPLUS-i4pac(5)




X024c
ISOPLUS-i4pac(3asym)



X024e
ISOPLUS-i4pac(2sym)



X024b
ISOPLUS-i4pac(3sym)



X024d
ISOPLUS-i4pac(5HC)


MOSFETs

Part Number	Configuration	Circuit Diagram/Technology		V_{DS}	I_{D25} $T_C = 25\text{ }^{\circ}\text{C}$	$I_{D90/110}$ $T_C = 90\text{ }^{\circ}\text{C}$ (110 $^{\circ}\text{C}$)	$R_{DS(on)}$ $T_C = 25\text{ }^{\circ}\text{C}$ typ.	Package
				V	A	A	m Ω	
IXTF1R4N450	Single	A	High Voltage MOSFET	4500	1.4	na	<(40)	ISOPLUS-i4pac (3asym)
IXTF02N450		A	High Voltage MOSFET		0.2	na	<(625)	
IXTF1N450		A	High Voltage MOSFET		0.9	na	<(80)	
MXB12R600DPHFC	Boost	C	X2-Class Power MOSFET	600	18	12.5	160	ISOPLUS-i4pac (5)

IGBTs

Part Number	Configuration	Circuit Diagram/Technology		V_{CES}	I_{D25} $T_C = 25\text{ }^{\circ}\text{C}$	$I_{D90/110}$ $T_C = 90\text{ }^{\circ}\text{C}$ (110 $^{\circ}\text{C}$)	$V_{CE(sat)}$ typ. $T_C = 25\text{ }^{\circ}\text{C}$ typ.	Package
				V	A	A	V	
IXYF16N250CV ¹	Single	F	High voltage XPT™ IGBT	2500	26	(14)	3.3	ISOPLUS-i4pac (3asym)
IXBF22N300	Single	F	BiMOSFET™	3000	38	22	2.2	ISOPLUS-i4pac (3asym)
IXBF32N300	Single	F	BiMOSFET™	3000	40	22	2.8	ISOPLUS-i4pac (3asym)
IXBF42N300	Single	F	BiMOSFET™	3000	60	(24)	2.5	ISOPLUS-i4pac (3asym)
IXBF55N300		F	BiMOSFET™		86	(34)	2.7	
IXYF40N450	Single	E	High voltage XPT™ IGBT	4500	60	(32)	3.2	ISOPLUS-i4pac 3asym)

¹ Not for new design

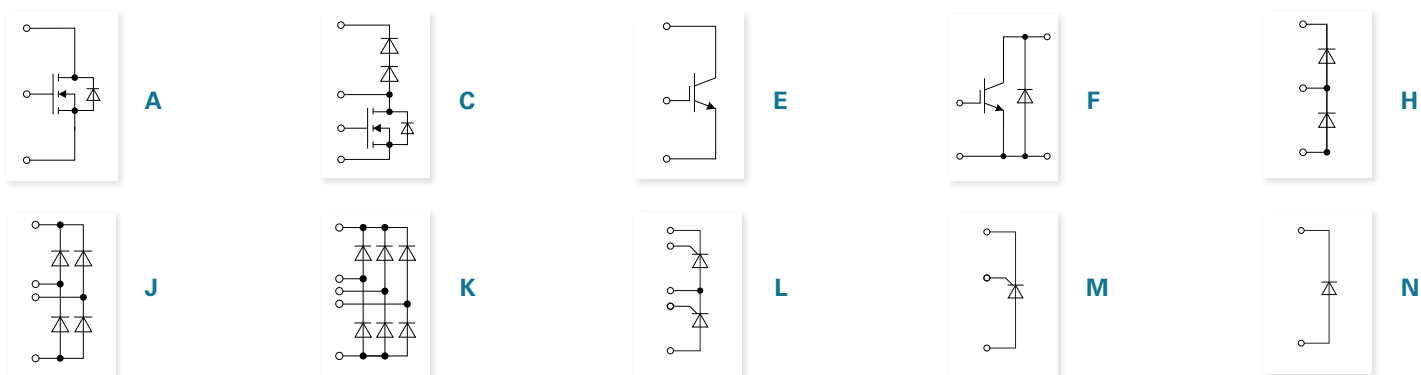

Thyristor & Diode Configurations

Part Number	Configuration	Circuit diagram/Technology		Voltage	$I_{D(AV)M}$ $T_C = 90^\circ C$	Package
				V	A	
CS20-22MOF1	Single	M	Thyristor	2200	18	ISOPLUS-i4pac (3asym)
DNA30E2200FE	High voltage	N	Rectifier	2200	30	ISOPLUS-i4pac(2sym)
CS20-25MO1F		M	Thyristor	2500	18	ISOPLUS-i4pac (3asym)
CLA40P1200FC	Phase leg	L	Thyristor	2×1200	40	ISOPLUS-i4pac (5)
DSEE55-24N1F		H	HiPerFRED		55	ISOPLUS-i4pac (3sym)
CMA30P1600FC	Phase leg	L	Thyristor	2×1600	30	ISOPLUS-i4pac (5)
CMA50P1600FC		L	Thyristor		50	
DHH55-36N1F	Phase leg	H	Sonic-FRD	2×1800	50	ISOPLUS-i4pac (3sym)
FBE22-06N1	1-Phase bridge	J	HiPerFRED	600	20	ISOPLUS-i4pac (5)
FBO16-12N	1-Phase bridge	J	Rectifier	1200	22	ISOPLUS-i4pac (5)
FBO40-12N		J	Rectifier		40	
FUO22-12N	3-Phase bridge	K	Rectifier	1200	27	ISOPLUS-i4pac (5)
FUE30-12N1		K	HiPerFRED		30	
FUO22-16N	3-Phase bridge	K	Rectifier	1600	27	ISOPLUS-i4pac (5)
FUO50-16N		K	Rectifier		50	

MOSFET

IX	T	X	6	N	200	P3	HV	Example
----	---	---	---	---	-----	----	----	---------

IX								IXYS – LF Technology
----	--	--	--	--	--	--	--	----------------------

		MOSFET Type
T		Standard
F		HiPerFET™
S		SiC

		Package Type
A		TO-263
B		PLUS264™
C		ISOPLUS220™
F		ISOPLUS i4-PAC™
G		TOLL
H		TO-247
J		ISO247
K		TO-264
L		ISOPLUS i5-PAC™ (ISOPLUS264™)
N		SOT227B
P		TO-220
Q		TO-3P
R		ISOPLUS247™
T		TO-268
X		PLUS247™
Y		TO-252
Z		DE

		Current Rating @ 25°C (Examples)
08		08 = 0.8 A
1R6		1R6 = 1.6 A
6		6 = 6 A
64		64 = 64 A
110		110 = 110 A

		MOSFET Channel Type
N		N-Channel type
P		P-Channel type


		Voltage Class (Examples)
055		055 = 55 V
06		06 = 60 V
50		50 = 500 V
200		200 = 2000 V

		Technology Series Suffix
C		Legacy / High Voltage
D		CoolMOS®
L		Depletion
P		Linear
Q		Polar™
T		Q-Class
X		Trench
		Ultra junction X-Class
	2	Gen.1 Die technology
	3	Gen.2 Die technology
	4	Gen.3 Die technology
		Gen.4 Die technology

		Suffix
-4		TO-247 w/ 4 leads
-7		TO-263 w/ 7 leads
A		Automotive qualified
M		Overmolded package
HV		High-voltage package
-TRL		Tape and reel packing

The metal oxide semiconductor field effect transistor (MOSFET) is used for high-frequency switching control of power electronic systems. Littelfuse offers various MOSFET technologies to meet customer requirements for voltage, on-state resistance, and switching frequency. Here is a graphical representation of our basic MOSFET offerings:

$R_{DS(on)}$ and Blocking Voltage Ranges per MOSFET Technology

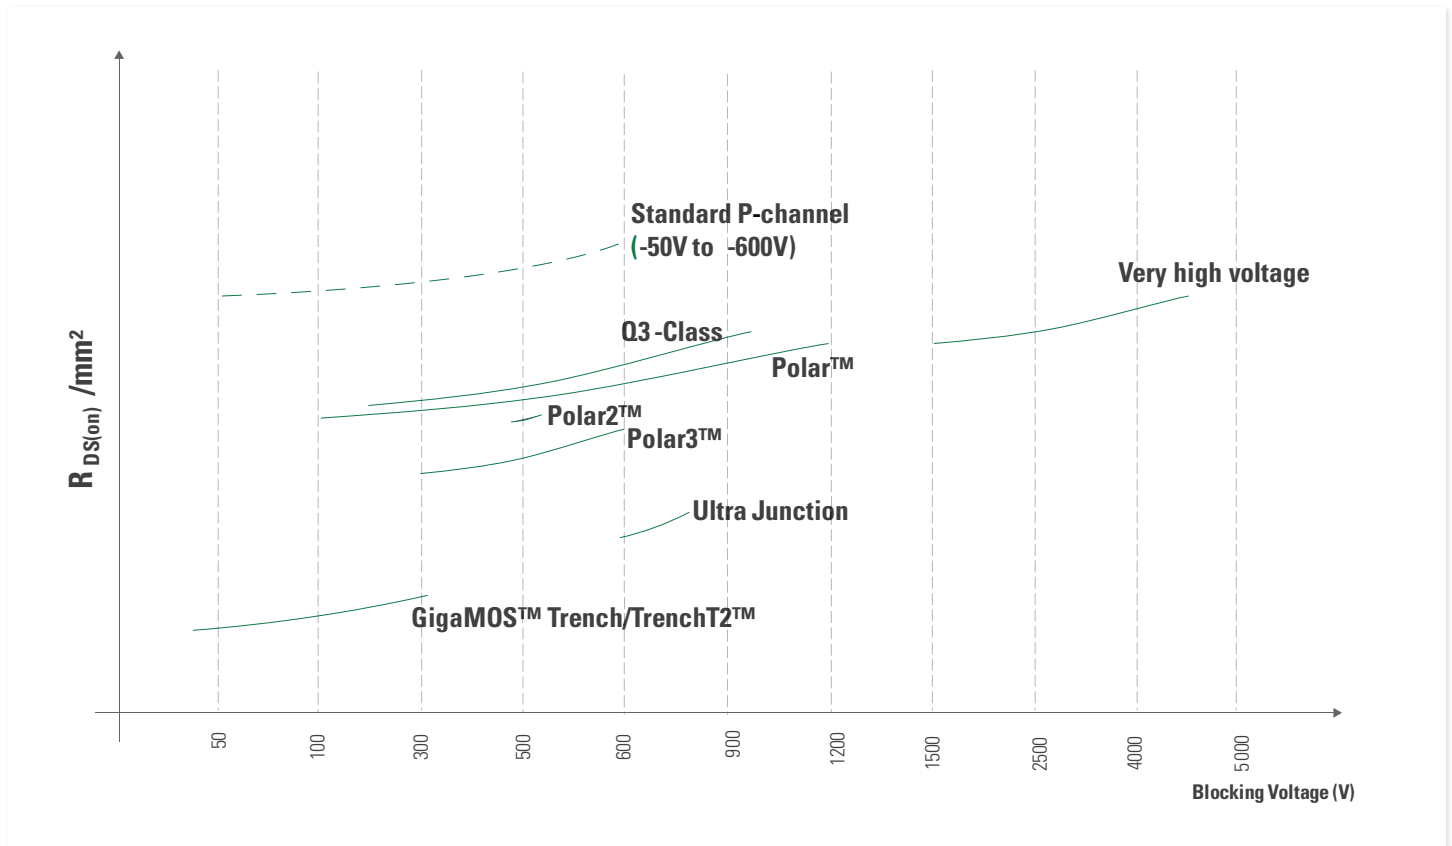

Trench and TrenchT2™ Power MOSFET

Littelfuse Trench Power MOSFETs are ideally suited for low-voltage, high-current applications. These MOSFETs feature an exceptionally low $R_{DS(on)}$, thus guaranteeing low power dissipation. Trench HiPerFET™ versions feature all of the advantages presented by Trench Standard Power MOSFET from Littelfuse with the added benefit of a fast intrinsic body diode that provides low reverse recovery charge (Q_{rr}) and excellent commutating dv/dt ratings for enhanced power switching capabilities and device ruggedness.

Ultrajunction Technology Power MOSFET

These devices are developed using charge compensation principles and proprietary process technology, resulting in Power MOSFET having significantly reduced resistance $R_{DS(on)}$ and gate charge Q_g . They also exhibit superior dv/dt capability and avalanche performance. The Ultrajunction family of power MOSFETs is available in four generations of technology, namely X, X2, X3 and X4, depending on voltage class. They are designed for applications such as switched mode and resonant mode power supplies, DC-DC converters, PFC circuits, AC and DC motor drives, and robotic and servo control. These MOSFETs enable higher efficiency, along with high power density and cooler system performance. The X-, X2-, and X3-Class Power MOSFETs are also available with fast body diodes (HiPerFET™).

Polar™ Power MOSFET

Polar™ MOSFETs (IXT..) feature a proprietary cell design and process that has resulted in a MOSFET with a 30% reduction in $R_{DS(on)}$ per unit area along with a decrease in gate charge. Littelfuse also reduces the wafer thickness, which substantially reduces the thermal resistance. The combination of lower $R_{DS(on)}$, lower gate charge Q_g , and higher power dissipation capability has resulted in a new class of MOSFET that will increase the cost effectiveness in switch mode power supply (SMPS) applications.

Polar™ HiPerFETs™ (IXF..) from Littelfuse combine the strengths of the Polar Standard product family with a faster body diode, whose reverse recovery time (t_{rr}) is reduced, making them suitable for phase-shift bridges, motor control, and uninterruptible power supply applications (UPS). This family of HiPerFETs™ provides the lowest $R_{DS(on)}$, low R_{thJC} , low Q_g , and enhanced dv/dt capability.

PolarP2™ Power MOSFET

PolarP2™ devices represent an optimized range of the standard Polar platform for 500 V device ratings.

PolarP3™ HiPerFET™ Power MOSFET

The PolarP3™ HiPerFET™ product family is the latest addition to benchmark high-performance Polar-Series product line, covering the between 500 V and 600 V voltage range. Featuring best-in-class figure of merit (FOM), $R_{DS(on)} \times Q_g$, PolarP3™ HiPerFET, provides an excellent alternative to weaker super junction technologies. All Littelfuse Polar MOSFET are 100% tested for avalanche energy, proving that it is the industry standard for reliability and ruggedness.

Extended FBSOA Linear Power MOSFET

Extended FBSOA Linear Power MOSFETs from Littelfuse are a class of rugged Power MOSFETs tailored specifically for applications that require Power MOSFETs to operate in their current saturation region. These new devices feature low static drain to source on-resistances and provide unparalleled performance and reliability in controlled current output applications. Typical applications that stand to benefit from this new class of extended FBSOA power MOSFETs include circuit breakers, current sources, programmable loads, power controllers, power regulators, motor control, power amplifiers, and soft start applications. In the linear mode, power MOSFETs are subjected to high thermo-electrical stress caused by the simultaneous occurrence of high drain voltage and current, resulting in high power dissipation. Littelfuse has optimized the internal structure of these MOSFETs, achieving an extended forward bias safe operating area (FBSOA) capability to overcome the limitations posed by conventional power MOSFETs operating in current saturation regions. These extended FBSOA Power MOSFETs are not intended for high-speed switching applications.

Depletion-Mode MOSFET

Depletion-Mode Power MOSFETs from Littelfuse operate in a “normally-on” mode that does not require energy or gate voltage to turn on. Unlike the regular enhancement type MOSFETs, these Depletion-Mode MOSFETs require a negative gate bias to turn off. Consequently, they remain at or above zero gate bias voltage; otherwise, however, they have similar MOSFET characteristics. The “normally-on” operational mode of these devices, combined with an enhanced linear operating capability, allows for ideal device selection in terms of current sources, current regulators, solid-state relays, level shifting, active loads, start-up circuits, and active power filters. Since these devices require no energy or gate voltage to turn on, high energy efficiency can be achieved through device implementation in zero power, “normally on” load switch applications. Given the high degree of current regulation, these devices can also act as active inductors with high dynamic impedance in power filter applications to limit the voltage, current noise, and spikes. Furthermore, these devices can provide active circuit protection to limit the surge of current during short circuits or overload conditions.

Q3-Class HiPerFET™

Q3-Class HiPerFET™ MOSFETs (identified by the suffix letter Q3) are the direct result of a revolutionary new chip design that decreases the MOSFET total gate charge (Q_g) and the Miller capacitance (C_{rss}) while maintaining the ruggedness and fast-switching intrinsic diode of the company's current HiPerFET™ product line. The result is a MOSFET with dramatically improved switching efficiencies, thus enabling higher frequency operation and smaller power supplies.

PolarP™ P-Channel Power MOSFET

Littelfuse Polar technology platform, employed in our PolarP™ P-Channel MOSFETs, uses a proprietary cell design that improves overall device efficiency and performance. This technology platform reduces on-state resistance by as much as 30% and gate charge by 40% compared to legacy counterparts. With such low on-state resistances, these devices offer low conduction and switching losses and low input capacitance. The combination of low $R_{DS(on)}$ and gate charge allows for improved energy efficiency. These P-Channel MOSFETs are dynamic dv/dt and avalanche-rated, making them extremely rugged in demanding operating environments and can easily be paralleled due to an on-state resistance with a positive temperature coefficient. These are ideal for “high-side” switching in which a simple drive circuit referenced to ground can be used, circumventing additional “high-side” driver circuitry commonly involved in the use of N-Channel MOSFETs. This will help designers reduce component count and improve reliability. Furthermore, it allows for the design of a complementary power output stage with a corresponding Littelfuse N-Channel MOSFET for a power half-bridge stage with a simple drive circuit.

TrenchP™ P-Channel Power MOSFET


This family of P-Channel devices from Littelfuse benefits from technological advances derived from robust trench cell design commonly implemented in their wide portfolio of industry-recognized power devices. They feature an ultra low $R_{DS(on)}$, minimizing conduction losses and promoting improved operating and thermal efficiencies. These TrenchP™ P-Channel MOSFETs are suitable for “high-side” switching in which a simple drive circuit referenced to ground can be employed, circumventing additional “high-side” driver circuitry commonly involved in the use of an N-Channel MOSFET. This enables designers to reduce component count, thereby improving drive circuit simplicity and cost structure. Furthermore it allows for the design of a complementary power output stage with a corresponding Littelfuse N-Channel MOSFET for a power half-bridge stage with a simple drive circuit. Common applications that will greatly benefit from these devices include high side Switching, high current regulators, DC Choppers, CMOS high power amplifiers, push-pull amplifiers and power solid state relays.

Very High Voltage Power MOSFET


VHV N-Channel Power MOSFETs from Littelfuse are specifically designed to address demanding, fast-switching applications requiring blocking capabilities of 2.5 kV to 4.5 kV. These VHV Power MOSFETs are also ideally suited for parallel operation due to the positive temperature coefficient of their on-state resistance. Parallel operation with these devices provides a more cost-effective solution than employing series-connected, lower-voltage MOSFET. The reduction or replacement of multiple series-connected devices and the associated gate drive circuitry commonly involved simplifies design, improves reliability, and reduces over-all system costs.

These VHV MOSFETs are an optimal solution in applications such as laser and x-ray generation systems, high-voltage power supplies, pulse circuits, high voltage automated test equipment, and capacitor discharge circuits. 4.5 kV device offerings feature high isolation capability with superior thermal performance.

Trench Power MOSFET




X004
TO-252AA




X005a
TO-220AB




X011b
TO-263AB




X014a
TO-247AD



X017a
TO-3P




X022c
ISOPLUS264™



X024d
ISOPLUS i4-PAC™




X027a
SOT-227B (miniBLOC)



Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IOTP44N10T	100	44	0.03	1567	27.4	60	1.15	130	TO-220AB
IXTY44N10T		44	0.03	1567	27.4	60	1.15	130	TO-252AA
IOTP60N10T		60	0.018	2650	49	59	0.85	176	TO-220AB
IXTA60N10T		60	0.018	2650	49	59	0.85	176	TO-263AB
IXTQ60N10T		60	0.018	2650	49	59	0.85	176	TO-3P
IOTP80N10T		80	0.014	3040	60	100	0.65	230	TO-220AB
IXTF200N10T		90	0.007	9400	152	76	0.96	156	ISOPLUS i4-PAC™
IOTP130N10T		130	0.0091	5080	104	67	0.42	360	TO-220AB
IXTH130N10T		130	0.0091	5080	104	67	0.42	360	TO-247AD
IXTA130N10T		130	0.0091	5080	104	67	0.42	360	TO-263AB
IXTQ130N10T		130	0.0091	5080	104	67	0.42	360	TO-3P
IOTP180N10T		180	0.0064	6900	151	72	0.31	480	TO-220AB
IXTH180N10T		180	0.0064	6900	151	100	0.31	480	TO-247AD
IXTA180N10T		180	0.0064	6900	151	72	0.31	480	TO-263AB
IXTQ180N10T		180	0.0064	6900	151	100	0.31	480	TO-3P
IXTN200N10T		200	0.0055	9400	152	76	0.3	550	SOT-227B (miniBLOC)
IXTH200N10T		200	0.0055	9400	152	76	0.27	550	TO-247AD
IXTQ200N10T		200	0.0055	9400	152	76	0.27	550	TO-3P
IOTP48N20T	200	48	0.05	3090	60	130	0.5	250	TO-220AB
IXTA48N20T		48	0.05	3090	60	130	0.5	250	TO-263AB
IXTQ48N20T		48	0.05	3090	60	130	0.5	250	TO-3P
IOTP60N20T		60	0.04	4530	73	118	0.3	500	TO-220AB
IXTA60N20T		60	0.04	4530	73	118	0.3	500	TO-263AB
IXTQ60N20T		60	0.04	4530	73	118	0.3	500	TO-3P
IOTP86N20T		86	0.029	4500	90	140	0.31	480	TO-220AB
IXTA86N20T		86	0.029	4500	90	140	0.31	480	TO-263AB
IXTQ86N20T		86	0.029	4500	90	140	0.31	480	TO-3P
IXTH130N20T		130	0.016	8800	150	150	0.18	830	TO-247AD
IOTP50N25T	250	50	0.06	4000	78	166	0.31	400	TO-220AB
IXTA50N25T		50	0.06	4000	78	166	0.31	400	TO-263AB
IXTQ50N25T		50	0.06	4000	78	166	0.31	400	TO-3P
IOTP76N25T		76	0.039	4920	92	148	0.27	460	TO-220AB
IXTH76N25T		76	0.039	4920	92	148	0.27	460	TO-247AD
IXTA76N25T		76	0.039	4920	92	148	0.27	460	TO-263AB
IXTQ76N25T		76	0.039	4920	92	148	0.27	460	TO-3P
IXTH86N25T		86	0.037	5330	105	156	0.23	540	TO-247AD
IXTQ86N25T		86	0.037	5330	105	156	0.23	540	TO-3P
IXTH96N25T		96	0.029	6100	114	158	0.2	625	TO-247AD
IXTQ96N25T		96	0.029	6100	114	158	0.2	625	TO-3P
IXTH110N25T		110	0.024	9400	157	170	0.18	694	TO-247AD


MOSFET



**D5
DE475**




**X011b
TO-263AB**




**X016a
ISOPLUS247™**




**X027a
SOT-227B (miniBLOC)**




**X004
TO-252AA**




**X014a
TO-247AD**




**X019
TO-268AA**




**X005a
TO-220AB**



**X015a
PLUS247**



**X020a
TO-264**




Trench HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr} max (typ.)	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFA130N10T	100	130	0.0091	5080	104	67	0.42	360	TO-263AB
IXFP130N10T		130	0.0091	5080	104	67	0.42	360	TO-220AB
IXFH230N10T		230	0.0047	15300	250	-82	0.23	650	TO-247AD
IXFX360N10T		360	0.0029	33000	525	130	0.12	1250	PLUS247
IXFN360N10T		360	0.0026	33000	525	130	0.18	830	SOT-227B (miniBLOC)
IXFK360N10T		360	0.0029	33000	525	130	0.12	1250	TO-264
IXFX420N10T		420	0.0026	47000	670	140	0.09	1670	PLUS247
IXFN420N10T		420	0.0023	47000	670	140	0.14	1070	SOT-227B (miniBLOC)
IXFK420N10T		420	0.0026	47000	670	140	0.09	1670	TO-264
IXFA102N15T	150	102	0.018	5220	87	120	0.33	455	TO-263AB
IXFH102N15T		102	0.018	5220	87	120	0.33	455	TO-247AD
IXFP102N15T		102	0.018	5220	87	120	0.33	455	TO-220AB
IXFH160N15T		160	0.0096	8800	160	90	0.18	830	TO-247AD
IXFH150N20T	200	150	0.015	11700	177	-100	0.14	890	TO-247AD
IXFT150N20T		150	0.015	11700	177	-100	0.14	890	TO-268AA
IXFR230N20T		156	0.008	28000	378	200	0.25	600	ISOPLUS247™
IXFX170N20T		170	0.011	19600	265	200	0.13	1150	PLUS247
IXFK170N20T		170	0.011	19600	265	200	0.13	1150	TO-264
IXFN230N20T		220	0.0075	28000	378	200	0.138	1090	SOT-227B (miniBLOC)
IXFX230N20T		230	0.0075	28000	378	200	0.09	1670	PLUS247
IXFK230N20T		230	0.0075	28000	378	200	0.9	1670	TO-264
IXFH110N25T	250	110	0.024	9400	157	170	0.18	694	TO-247AD
IXFH120N25T		120	0.023	11300	180	-108	0.14	890	TO-247AD
IXFT120N25T		120	0.023	11300	180	-108	0.14	890	TO-268AA
IXFN140N25T		120	0.017	19000	255	200	0.18	690	SOT-227B (miniBLOC)
IXFX140N25T		140	0.017	19000	255	200	0.13	960	PLUS247
IXFK140N25T		140	0.017	19000	255	200	0.13	960	TO-264
IXFN180N25T		168	0.0129	23800	364	200	0.138	900	SOT-227B (miniBLOC)
IXFX180N25T		180	0.0129	23800	364	200	0.09	1390	PLUS247
IXFK180N25T		180	0.0129	23800	364	200	0.09	1390	TO-264
IXFH46N30T		46	0.08	4770	86	150	0.27	460	TO-247AD
IXFH86N30T	300	86	0.043	11300	180	150	0.15	830	TO-247AD
IXFT86N30T		86	0.043	11300	180	150	0.15	830	TO-268AA
IXFH94N30T		94	0.036	11400	190	-155	0.14	890	TO-247AD
IXFT94N30T		94	0.036	11400	190	-155	0.14	890	TO-268AA
IXFX120N30T		120	0.024	20000	265	200	0.13	960	PLUS247
IXFK120N30T		120	0.024	20000	265	200	0.13	960	TO-264
IXFN160N30T		130	0.019	28000	335	200	0.138	900	SOT-227B (miniBLOC)
IXFX160N30T		160	0.019	28000	335	200	0.09	1390	PLUS247
IXFK160N30T		160	0.019	28000	335	200	0.09	1390	TO-264

Trench HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25°C	R _{DS(on)} T _J = 25°C	C _{iss} typ.	Q _g typ.	t _{rr} max (typ.)	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IOTP100N04T2	40	100	0.007	2690	25,5	34	1	150	TO-220AB
IXTA100N04T2		100	0.007	2690	25,5	34	1	150	TO-263AB
IOTP120N04T2		120	0.0061	3240	58	35	0.75	200	TO-220AB
IXTA120N04T2		120	0.0061	3240	58	35	0.75	200	TO-263AB
IOTP160N04T2		160	0.005	4640	79	40	0.6	250	TO-220AB
IXTA160N04T2		160	0.005	4640	79	40	0.6	250	TO-263AB
IOTP220N04T2		220	0.0035	6820	112	45	0.42	360	TO-220AB
IXTA220N04T2		220	0.0035	6820	112	45	0.42	360	TO-263AB
IOTP300N04T2		300	0.0025	10700	145	53	0.31	480	TO-220AB
IXTH300N04T2		300	0.0025	10700	145	53	0.31	480	TO-247AD
IXTA300N04T2		300	0.0025	10700	145	53	0.31	480	TO-263AB
IXTH500N04T2		500	0.0016	25000	405	84	0.15	1000	TO-247AD
IXTT500N04T2		500	0.0016	25000	405	84	0.15	1000	TO-268AA
IXTX600N04T2		600	0.0015	40000	590	100	0.12	1250	PLUS247
IXTN600N04T2		600	0.0011	40000	590	100	0.16	940	SOT-227B (miniBLOC)
IXTK600N04T2		600	0.0015	40000	590	100	0.12	1250	TO-264
IXTA90N055T2	55	90	0.0084	2770	42	37	1	150	TO-263AB
IOTP90N055T2		90	0.0084	2770	42	37	1	150	TO-220AB
IXTY90N055T2		90	0.0084	2770	42	37	1	150	TO-252AA
IOTP110N055T2		110	0.0066	3060	57	38	0.82	180	TO-220AB
IXTA110N055T2		110	0.0066	3060	57	38	0.82	180	TO-263AB
IOTP140N055T2		140	0.0054	4760	82	40	0.6	250	TO-220AB
IXTA140N055T2		140	0.0054	4760	82	40	0.6	250	TO-263AB
IOTP200N055T2		200	0.0042	6970	109	49	0.42	360	TO-220AB
IXTA200N055T2		200	0.0042	6970	109	49	0.42	360	TO-263AB
IOTP260N055T2		260	0.0033	10800	140	60	0.31	480	TO-220AB
IXTH260N055T2		260	0.0033	10800	140	60	0.31	480	TO-247AD
IXTA260N055T2		260	0.0033	10800	140	60	0.31	480	TO-263AB
IXTH360N055T2		360	0.0024	20000	330	78	0.16	935	TO-247AD
IXTT360N055T2		360	0.0024	20000	330	78	0.16	935	TO-268AA
IXTH440N055T2		440	0.0018	25000	405	76	0.15	1000	TO-247AD
IXTT440N055T2		440	0.0018	25000	405	76	0.15	1000	TO-268AA
IXTX550N055T2	75	550	0.0016	40000	595	100	0.12	1250	PLUS247
IXTN550N055T2		550	0.0013	40000	595	100	0.16	940	SOT-227B (miniBLOC)
IXTK550N055T2		550	0.0016	40000	595	100	0.12	1250	TO-264
IOTP70N075T2		70	0.012	2580	46	48	1	150	TO-220AB
IXTA70N075T2		70	0.012	2580	46	48	1	150	TO-263AB
IOTP90N075T2		90	0.01	3290	54	50	0.82	180	TO-220AB
IXTA90N075T2		90	0.01	3290	54	50	0.82	180	TO-263AB
IOTP120N075T2		120	0.0077	4740	78	50	0.6	250	TO-220AB
IXTA120N075T2		120	0.0077	4740	78	50	0.6	250	TO-263AB
IOTP170N075T2		170	0.0054	6860	109	63	0.42	360	TO-220AB
IXTA170N075T2		170	0.0054	6860	109	63	0.42	360	TO-263AB
IOTP230N075T2		230	0.0042	10.5	178	66	0.31	480	TO-220AB
IXTA230N075T2		230	0.0042	10.5	178	66	0.31	480	TO-263AB
IOTP80N12T2	120	80	0.017	4740	80	90	0.46	325	TO-220AB
IXTA80N12T2		80	0.017	4740	80	90	0.46	325	TO-263AB

MOSFET



D5
DE475



X014a
TO-247AD



X020a
TO-264



X011b
TO-263AB



X005a
TO-220AB



X015a
TO-247AD



X027a
SOT-227B (miniBLOC)




X007a
TO-220ABFP



X019
TO-268AA



X031a
SMPD-X




TrenchT2™ MOSFET in SMPD Package


Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
MMIX1T600N04T2	40	600	0.0013	40000	590	100	0.18	830	SMPD-X
MMIX1F520N075T2	75	500	0.0016	41000	545	150	0.18	830	SMPD-X


TrenchT2™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFP230N075T2	75	230	0.0042	10500	178	59	0.31	480	TO-220AB
IXFH230N075T2		230	0.0042	10500	178	59	0.31	480	TO-247AD
IXFA230N075T2		230	0.0042	10500	178	59	0.31	480	TO-263AB
IXFH340N075T2		340	0.0032	19000	300	75	0.16	935	TO-247AD
IXFT340N075T2		340	0.0032	19000	300	75	0.16	935	TO-268AA
IXFH400N075T2		400	0.0023	24000	420	77	0.15	1000	TO-247AD
IXFT400N075T2		400	0.0023	24000	420	77	0.15	1000	TO-268AA
IXFN520N075T2		480	0.0019	41000	545	n/a	0.16	940	SOT-227B (miniBLOC)
IXFX520N075T2		520	0.0022	41000	545	n/a	0.12	1250	PLUS247
IXFK520N075T2	100	520	0.0022	41000	545	n/a	0.12	1250	TO-264
IXFP130N10T2		130	0.0091	6600	130	n/a	0.42	360	TO-220AB
IXFA130N10T2		130	0.0091	6600	130	n/a	0.42	360	TO-263AB
IXFP180N10T2		180	0.006	10500	185	66	0.31	480	TO-220AB
IXFA180N10T2		180	0.006	10500	185	66	0.31	480	TO-263AB
IXFH320N10T2		320	0.0035	25000	430	98	0.15	1000	TO-247AD
IXFT320N10T2		320	0.0035	26000	430	98	0.15	1000	TO-268AA
IXFP76N15T2		76	0.02	5800	97	69	0.43	350	TO-220FPAB
IXFA76N15T2		76	0.02	5800	97	69	0.43	350	TO-263AB
IXFP110N15T2	150	110	0.013	8600	150	85	0.31	480	TO-220AB
IXFH110N15T2		110	0.013	8600	150	85	0.31	480	TO-247AD
IXFA110N15T2		110	0.013	8600	150	85	0.31	480	TO-263AB
IXFH160N15T2		160	0.009	15000	253	n/a	0.17	880	TO-247AD
IXFX240N15T2		240	0.0052	32000	460	n/a	0.12	1250	PLUS247
IXFN240N15T2		240	0.0052	32000	460	n/a	0.18	830	SOT-227B (miniBLOC)
IXFK240N15T2		240	0.0052	32000	460	n/a	0.12	1250	TO-264
IXFN360N15T2		310	0.004	47500	715	n/a	0.14	1070	SOT-227B (miniBLOC)
IXFX360N15T2		360	0.004	47500	715	n/a	0.09	1670	PLUS247
IXFK360N15T2	170	360	0.004	47500	715	n/a	0.09	1670	TO-264
IXFX220N17T2		220	0.0063	31000	500	n/a	0.12	1250	PLUS247
IXFK220N17T2		220	0.0063	31000	500	n/a	0.12	1250	TO-264
IXFN320N17T2		260	0.0052	45000	640	n/a	0.14	1070	SOT-227B (miniBLOC)
IXFX320N17T2		320	0.0052	45000	640	n/a	0.09	1670	PLUS247
IXFK320N17T2		320	0.0052	45000	640	n/a	0.09	1670	TO-264
IXFH150N17T2		150	0.012	14600	233	n/a	0.17	880	TO-247AD
IXFT150N17T2		150	0.012	14600	233	n/a	0.17	880	TO-268AA



X011c
TO-263ABHV



X014a
TO-247AD


X014c
TO-247HV


X015a
PLUS247


X015c
PLUS247HV



X016a
ISOPLUS247™



X016c
ISO247™



X019
TO-268AA


X020a
TO-264


X021a
PLUS264


X022e
ISOPLUS264/i5-Pak™





X024c
ISOPLUS i4-PAC™


X027a
SOT-227B (miniBLOC)


Very High Voltage Power MOSFET (2–4.7 kV)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTH1N200P3	2000	1	40	646	23.5	2300	1.00	125	TO-247AD
IXTH1N200P3HV		1	40	646	23.5	2300	1.00	125	TO-247HV
IXTA1N200P3HV		1	40	646	23.5	2300	1.00	125	TO-263ABHV
IXTH3N200P3HV		3	8	1860	70	420	0.24	520	TO-247HV
IXTT3N200P3HV		3	8	1860	70	420	0.24	520	TO-268HV
IXTF6N200P3		4	4.2	3700	143	520	0.58	215	ISOPLUS i4-PAC™
IXTX6N200P3HV		6	4	3700	143	520	0.13	960	PLUS247HV
IXTA02N250HV	2500	0.2	450	116	7.4	1500	1.50	83	TO-263ABHV
IXTH02N250		0.2	450	116	7.4	1500	1.50	83	TO-247AD
IXTH05N250P3HV		0.5	110	303	10.5	1200	1.20	104	TO-247HV
IXTF1N250		1	40	1660	41	2500	1.13	110	ISOPLUS i4-PAC™
IXTH1R4N250P3		1.4	28	960	33	1800	0.64	195	TO-247AD
IXTH1N250		1.5	40	1660	41	2500	0.50	250	TO-247AD
IXTT1N250HV		1.5	40	1660	41	2500	0.50	250	TO-268HV
IXTN5N250		5	8.8	8560	200	1200	0.18	700	SOT-227B (miniBLOC)
IXTK5N250		5	8.8	8560	200	1200	0.13	960	TO-264
IXTX5N250		5	8.8	8560	200	1200	0.13	960	PLUS247
IXTH04N300P3HV	3000	0.4	190	283	13	1100	1.20	104	TO-247HV
IXTT1N300P3HV		1	50	895	30.6	1800	0.64	195	TO-268HV
IXTH1N300P3HV		1	50	895	30.6	1800	0.64	195	TO-247HV
IXTF2N300P3		1.6	21	1890	73	400	0.77	160	ISOPLUS i4-PAC™
IXTH2N300P3HV		2	21	1890	73	400	0.24	520	TO-247HV
IXTT2N300P3HV		2	21	1890	73	400	0.24	520	TO-268HV
IXTX4N300P3HV		4	12.5	3680	139	420	0.13	960	PLUS247HV
IXTH02N450HV	4500	0.2	625	246	10.6	1600	1.10	113	TO-247HV
IXTF02N450		0.2	625	246	10.6	1600	1.60	78	ISOPLUS i4-PAC™
IXTT02N450HV		0.2	625	246	10.6	1600	1.10	113	TO-268HV
IXTF1N450		0.9	80	1700	46	1750	0.77	165	ISOPLUS i4-PAC™
IXTT1N450HV		1	80	1700	46	1750	0.24	520	TO-268HV
IXTH1N450HV		1	80	1700	46	1750	0.24	520	TO-247HV
IXTF1R4N450		1.4	40	3300	88	660	0.65	190	ISOPLUS i4-PAC™
IXTX1R4N450HV		1.4	40	3300	88	660	0.13	960	PLUS247HV
IXTL2N450		2	20	6860	180	1750	0.56	220	ISOPLUS264/i5-Pak
IXTL2N470	4700	2	20	6860	180	1750	0.56	220	ISOPLUS264/i5-Pak

MOSFET



Polar™ Standard MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTP75N10P	100	75	0.025	2250	74	120	0.42	360	TO-220AB
IXTA75N10P		75	0.025	2250	74	120	0.42	360	TO-263AB
IXTQ75N10P		75	0.025	2250	74	120	0.42	360	TO-3P
IXTT110N10P		110	0.015	3550	110	130	0.31	480	TO-268AA
IXTQ110N10P		110	0.015	3550	110	130	0.31	480	TO-3P
IXTR200N10P		120	0.008	7600	235	100	0.5	300	ISOPLUS247™
IXTT140N10P		140	0.011	4700	155	120	0.25	600	TO-268AA
IXTQ140N10P		140	0.011	4700	155	120	0.25	600	TO-3P
IXTK170N10P		170	0.009	6000	198	120	0.21	715	TO-264
IXTT170N10P		170	0.009	6000	198	120	0.21	715	TO-268AA
IXTQ170N10P		170	0.009	6000	198	120	0.21	715	TO-3P
IXTK200N10P		200	0.0075	7600	240	100	0.18	800	TO-264
IXTP62N15P	150	62	0.04	2250	70	150	0.42	350	TO-220AB
IXTA62N15P		62	0.04	2250	70	150	0.42	350	TO-263AB
IXTQ62N15P		62	0.04	2250	70	150	0.42	350	TO-3P
IXTT96N15P		96	0.024	3500	110	150	0.31	480	TO-268AA
IXTQ96N15P		96	0.024	3500	110	150	0.31	480	TO-3P
IXTT120N15P		120	0.016	4900	150	150	0.25	600	TO-268AA
IXTQ120N15P		120	0.016	4900	150	150	0.25	600	TO-3P
IXTK150N15P		150	0.013	5800	190	150	0.21	714	TO-264
IXTQ150N15P		150	0.013	5800	190	150	0.21	714	TO-3P
IXTK180N15P		180	0.01	7000	240	150	0.18	800	TO-264
IXTP50N20P	200	50	0.06	2720	70	150	0.42	360	TO-220AB
IXTA50N20P		50	0.06	2720	70	150	0.42	360	TO-263AB
IXTQ50N20P		50	0.06	2720	70	150	0.42	360	TO-3P
IXTT74N20P		74	0.034	3300	107	160	0.31	480	TO-268AA
IXTQ74N20P		74	0.034	3300	107	160	0.31	480	TO-3P
IXTH96N20P		96	0.024	4800	145	160	0.25	600	TO-247AD
IXTT96N20P		96	0.024	4800	145	160	0.25	600	TO-268AA
IXTQ96N20P		96	0.024	4800	145	160	0.25	600	TO-3P
IXTK120N20P		120	0.022	6000	152	180	0.21	714	TO-264
IXTQ120N20P		120	0.022	6000	152	180	0.21	714	TO-3P
IXTK140N20P		140	0.018	7500	240	180	0.18	800	TO-264
IXTP42N25P	250	42	0.084	2300	70	200	0.42	300	TO-220AB
IXTA42N25P		42	0.084	2300	70	200	0.42	300	TO-263AB
IXTQ42N25P		42	0.084	2300	70	200	0.42	300	TO-3P
IXTT64N25P		64	0.049	3450	105	200	0.31	400	TO-268AA
IXTQ64N25P		64	0.049	3450	105	200	0.31	400	TO-3P
IXTK82N25P		82	0.035	4800	142	200	0.25	500	TO-264
IXTT82N25P		82	0.035	4800	142	200	0.25	500	TO-268AA
IXTQ82N25P		82	0.035	4800	142	200	0.25	500	TO-3P
IXTK100N25P		100	0.027	6300	185	200	0.21	600	TO-264
IXTT100N25P		100	0.027	6300	185	200	0.21	600	TO-268AA
IXTQ100N25P		100	0.027	6300	185	200	0.21	600	TO-3P
IXTK120N25P		120	0.024	8700	185	200	0.18	700	TO-264
IXTP36N30P	300	36	0.11	2250	70	250	0.42	300	TO-220AB
IXTA36N30P		36	0.11	2250	70	250	0.42	300	TO-263AB
IXTQ36N30P		36	0.11	2250	70	250	0.42	300	TO-3P
IXTT52N30P		52	0.066	3490	110	250	0.31	400	TO-268AA
IXTQ52N30P		52	0.066	3490	110	250	0.31	400	TO-3P

Polar™ Standard MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTT69N30P	300	69	0.0490	4960	156	330	0.25	500	TO-268AA
IXTQ69N30P		69	0.0490	4960	156	330	0.25	500	TO-3P
IXTH88N30P		88	0.0400	6300	180	250	0.21	600	TO-247AD
IXTK88N30P		88	0.0400	6300	180	250	0.21	600	TO-264
IXTT88N30P		88	0.0400	6300	180	250	0.21	600	TO-268AA
IXTQ88N30P		88	0.0400	6300	180	250	0.21	600	TO-3P
IXTK102N30P		102	0.0330	7500	224	250	0.18	700	TO-264
IXTK140N30P		140	0.2400	14800	185	250	0.12	1040	TO-264
IXTP12N50P	500	12	0.5000	1830	29	300	0.62	200	TO-220AB
IXTA12N50P		12	0.5000	1830	29	300	0.62	200	TO-263AB
IXTP16N50P		16	0.4000	2480	43	400	0.42	300	TO-220AB
IXTA16N50P		16	0.4000	2480	43	400	0.42	300	TO-263AB
IXTQ16N50P		16	0.4000	2480	43	400	0.42	300	TO-3P
IXTH22N50P		22	0.2700	2880	50	400	0.35	350	TO-247AD
IXTQ22N50P		22	0.2700	2880	50	400	0.35	350	TO-3P
IXTT26N50P		26	0.2300	3600	65	300	0.31	400	TO-268AA
IXTQ26N50P		26	0.2300	3600	65	300	0.31	400	TO-3P
IXTH30N50P		30	0.2000	4150	70	400	0.27	460	TO-247AD
IXTT30N50P		30	0.2000	4150	70	400	0.27	460	TO-268AA
IXTQ30N50P		30	0.2000	4150	70	400	0.27	460	TO-3P
IXTH36N50P		36	0.1700	4700	82	400	0.23	540	TO-247AD
IXTT36N50P		36	0.1700	4700	82	400	0.23	540	TO-268AA
IXTQ36N50P		36	0.1700	4700	82	400	0.23	540	TO-3P
IXTQ44N50P		44	0.1400	5440	98	400	0.19	650	TO-3P
IXTP10N60P	600	10	0.7400	1720	32	500	0.62	200	TO-220AB
IXTA10N60P		10	0.7400	1720	32	500	0.62	200	TO-263AB
IXTP14N60P		14	0.5500	2500	36	500	0.42	300	TO-220AB
IXTA14N60P		14	0.5500	2500	36	500	0.42	300	TO-263AB
IXTQ14N60P		14	0.5500	2500	36	500	0.42	300	TO-3P
IXTQ18N60P		18	0.4200	2500	49	500	0.35	360	TO-3P
IXTQ22N60P		22	0.3500	3600	62	500	0.31	400	TO-3P
IXTH26N60P		26	0.2700	4150	72	500	0.27	460	TO-247AD
IXTT26N60P		26	0.2700	4150	72	500	0.27	460	TO-268AA
IXTH30N60P		30	0.2400	5050	82	500	0.23	540	TO-247AD
IXTQ30N60P		30	0.2400	5050	82	500	0.23	540	TO-3P
IXTP08N100P	1000	0.8	20.000	240	11.3	750	3.00	42	TO-220AB
IXTY08N100P		0.8	20.000	240	11.3	750	3.00	42	TO-252AA
IXTA08N100P		0.8	20.000	240	11.3	750	3.00	42	TO-263AB
IXTP1N100P		1	15.000	331	15.5	750	2.50	50	TO-220AB
IXTY1N100P		1	15.000	331	15.5	750	2.50	50	TO-252AA
IXTA1N100P		1	15.000	331	15.5	750	2.50	50	TO-263AB
IXTP1R4N100P		1.4	11.000	450	17.8	750	2.00	63	TO-220AB
IXTY1R4N100P		1.4	11.000	450	17.8	750	2.00	63	TO-252AA
IXTA1R4N100P		1.4	11.000	666	17.8	750	2.00	63	TO-263AB
IXTP2N100P		2	7.500	655	24.3	800	1.45	86	TO-220AB
IXTY2N100P		2	7.500	655	24.3	800	1.45	86	TO-252AA
IXTA2N100P		2	7.500	655	24.3	800	1.45	86	TO-263AB
IXTP3N100P		3	4.800	1100	39	820	1.00	125	TO-220AB
IXTH3N100P		3	4.800	1100	39	820	1.00	125	TO-247AD
IXTA3N100P		3	4.800	1100	39	820	1.00	125	TO-263AB
IXTP02N120P	1200	0.2	75.000	104	4.7	1600	3.80	33	TO-220AB
IXTY02N120P		0.2	75.000	104	4.7	1600	3.80	33	TO-252AA
IXTP06N120P		0.6	34.000	236	13.3	900	3.00	42	TO-220AB
IXTA06N120P		0.6	34.000	236	13.3	900	3.00	42	TO-263AB
IXTP08N120P		0.8	25.000	333	14	900	2.50	50	TO-220AB
IXTA08N120P		0.8	25.000	333	14	900	2.50	50	TO-263AB
IXTP1N120P		1	20.000	445	17.6	900	2.00	63	TO-220AB
IXTA1N120P		1	20.000	445	17.6	900	2.00	63	TO-263AB
IXTP1R4N120P		1.4	13.000	666	24.8	900	1.45	86	TO-220AB
IXTY1R4N120P		1.4	13.000	666	24.8	900	1.45	86	TO-252AA
IXTY1R4N120PHV		1.4	13.000	666	24.8	900	1.45	86	TO-252AA
IXTA1R4N120P		1.4	13.000	725	24.8	900	1.45	86	TO-263AB
IXTP2R4N120P		2.4	7.500	1207	37	920	1.00	125	TO-220AB
IXTH2R4N120P		2.4	7.500	1207	37	920	1.00	125	TO-247AD
IXTA2R4N120P		2.4	7.500	1207	37	920	1.00	125	TO-263AB

MOSFET



X005a
TO-220AB



X015a
PLUS247



X020a
TO-264



X027a
SOT-227B (miniBLOC)



X011b
TO-263AB



X016a
ISOPLUS247™



X021a
PLUS264




X014a
TO-247AD



X019
TO-268AA



X022a
ISOPLUS264™




Polar™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFH110N10P	100	110	0.015	3550	110	150	0.31	480	TO-247AD
IXFR200N10P		120	0.009	7600	235	150	0.50	300	ISOPLUS247™
IXFH140N10P		140	0.011	4700	155	150	0.25	600	TO-247AD
IXFT140N10P		140	0.011	4700	155	150	0.25	600	TO-268AA
IXFH170N10P		170	0.009	6000	198	150	0.21	715	TO-247AD
IXFK170N10P		170	0.009	6000	198	150	0.21	715	TO-264
IXFX200N10P		200	0.0075	7600	235	150	0.18	830	PLUS247
IXFN200N10P		200	0.0075	7600	235	150	0.22	680	SOT-227B (miniBLOC)
IXFK200N10P		200	0.0075	7600	235	150	0.18	830	TO-264
IXFX250N10P		250	0.0065	16000	205	200	0.12	1250	PLUS247
IXFK250N10P		250	0.0065	16000	205	200	0.12	1250	TO-264
IXFN300N10P		295	0.0055	23	279	200	0.14	1070	SOT-227B (miniBLOC)
IXFB300N10P		300	0.0055	23	279	200	0.10	1500	PLUS264
IXFH96N15P	150	96	0.024	3500	110	200	0.31	480	TO-247AD
IXFR180N15P		100	0.013	7000	240	200	0.50	300	ISOPLUS247™
IXFH120N15P		120	0.016	4900	150	200	0.25	600	TO-247AD
IXFT120N15P		120	0.016	4900	150	200	0.25	600	TO-268AA
IXFN180N15P		150	0.011	7000	240	200	0.22	680	SOT-227B (miniBLOC)
IXFH150N15P		150	0.013	5800	190	200	0.21	714	TO-247AD
IXFX180N15P		180	0.011	7000	240	200	0.18	830	PLUS247
IXFK180N15P		180	0.011	7000	240	200	0.18	830	TO-264
IXFK220N15P		220	0.009	15.4	162	200	0.12	1250	TO-264
IXFH74N20P		74	0.034	3300	107	200	0.31	480	TO-247AD
IXFR140N20P	200	90	0.022	7500	240	200	0.50	300	ISOPLUS247™
IXFH96N20P		96	0.024	4800	145	200	0.25	600	TO-247AD
IXFT96N20P		96	0.024	4800	145	200	0.25	600	TO-268AA
IXFN140N20P		115	0.018	7500	240	200	0.22	680	SOT-227B (miniBLOC)
IXFH120N20P		120	0.022	6000	152	200	0.21	714	TO-247AD
IXFK120N20P		120	0.022	6000	152	200	0.21	714	TO-264
IXFK140N20P		140	0.018	7500	240	200	0.18	830	TO-264
IXFX170N20P		170	0.014	11.4	185	200	0.12	1250	PLUS247
IXFK170N20P		170	0.014	11.4	185	200	0.12	1250	TO-264
IXFN210N20P		188	0.0105	18.6	255	200	0.14	1070	SOT-227B (miniBLOC)
IXFB210N20P	250	210	0.0105	18.6	255	200	0.10	1500	PLUS264
IXFH100N25P		100	0.027	6300	185	200	0.21	600	TO-247AD
IXFX120N25P		120	0.024	8700	185	200	0.18	700	PLUS247
IXFK120N25P		120	0.024	8700	185	200	0.18	700	TO-264
IXFH52N30P	300	52	0.066	3490	110	200	0.31	400	TO-247AD
IXFR102N30P		60	0.036	7500	224	200	0.50	250	ISOPLUS247™
IXFH69N30P		69	0.049	4960	156	200	0.25	500	TO-247AD
IXFT69N30P		69	0.049	4960	156	200	0.25	500	TO-268AA
IXFR140N30P		70	0.026	14800	185	200	0.35	360	ISOPLUS247™

Polar™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFN102N30P	300	86	0.0330	7500	224	200	0.22	570	SOT-227B (miniBLOC)
IXFH88N30P		88	0.0400	6300	180	200	0.21	600	TO-247AD
IXFK88N30P		88	0.0400	6300	180	200	0.21	600	TO-264
IXFT88N30P		88	0.0400	6300	180	200	0.21	600	TO-268AA
IXFK102N30P		102	0.0330	7500	224	200	0.18	700	TO-264
IXFN140N30P		110	0.0240	14800	185	200	0.18	700	SOT-227B (miniBLOC)
IXFN170N30P		138	0.0018	20	258	200	0.14	890	SOT-227B (miniBLOC)
IXFX140N30P		140	0.0240	14800	185	200	0.12	1040	PLUS247
IXFK140N30P		140	0.0240	14800	185	200	0.12	1040	TO-264
IXFB170N30P		170	0.0180	20	258	200	0.10	1250	PLUS264
IXFP12N50P	500	12	0.500	1830	29	200	0.62	200	TO-220AB
IXFA12N50P		12	0.500	1830	29	200	0.62	200	TO-263AB
IXFP16N50P		16	0.400	2480	43	200	0.42	300	TO-220AB
IXFH16N50P		16	0.400	2480	43	200	0.42	300	TO-247AD
IXFA16N50P		16	0.400	2480	43	200	0.42	300	TO-263AB
IXFR36N50P		19	0.190	5500	93	200	0.75	156	ISOPLUS247™
IXFH22N50P		22	0.270	2880	50	200	0.35	350	TO-247AD
IXFR44N50P		24	0.150	5440	98	200	0.60	208	ISOPLUS247™
IXFH26N50P		26	0.230	3600	60	200	0.31	400	TO-247AD
IXFH30N50P		30	0.200	4150	70	200	0.27	460	TO-247AD
IXFT30N50P		30	0.200	4150	70	200	0.27	460	TO-268AA
IXFH36N50P		36	0.170	5500	93	200	0.23	540	TO-247AD
IXFT36N50P		36	0.170	5500	93	200	0.23	540	TO-268AA
IXFR64N50P		37	0.095	9700	150	200	0.42	300	ISOPLUS247™
IXFH44N50P		44	0.140	5440	98	200	0.19	650	TO-247AD
IXFK44N50P		44	0.140	5440	98	200	0.19	650	TO-264
IXFT44N50P		44	0.140	5440	98	200	0.19	650	TO-268AA
IXFR80N50P		45	0.072	12700	197	200	0.35	360	ISOPLUS247™
IXFN64N50P		50	0.085	9700	150	200	0.20	625	SOT-227B (miniBLOC)
IXFX64N50P		64	0.085	9700	150	200	0.15	830	PLUS247
IXFK64N50P		64	0.085	9700	150	200	0.15	830	TO-264
IXFN80N50P		66	0.065	12700	195	200	0.18	700	SOT-227B (miniBLOC)
IXFL100N50P		68	0.052	20000	240	200	0.20	625	ISOPLUS264™
IXFX80N50P		80	0.065	12700	197	200	0.12	1040	PLUS247
IXFK80N50P		80	0.065	12700	197	200	0.12	1040	TO-264
IXFN100N50P		90	0.049	20000	240	200	0.12	1040	SOT-227B (miniBLOC)
IXFB100N50P		100	0.049	20000	240	200	0.10	1250	PLUS264
IXFP10N60P	600	10	0.740	1720	32	200	0.62	200	TO-220AB
IXFA10N60P		10	0.740	1720	32	200	0.62	200	TO-263AB
IXFP14N60P		14	0.550	2500	36	200	0.42	300	TO-220AB
IXFH14N60P		14	0.550	2500	36	200	0.42	300	TO-247AD
IXFA14N60P		14	0.550	2500	36	200	0.42	300	TO-263AB
IXFR30N60P		15	0.250	3820	85	200	0.75	166	ISOPLUS247™
IXFH18N60P		18	0.400	2500	50	200	0.35	360	TO-247AD
IXFR36N60P		20	0.200	5800	102	200	0.60	208	ISOPLUS247™
IXFH22N60P		22	0.350	3600	58	200	0.31	400	TO-247AD
IXFH26N60P		26	0.270	4150	72	200	0.27	460	TO-247AD
IXFT26N60P		26	0.270	4150	72	200	0.27	460	TO-268AA
IXFH30N60P		30	0.240	4000	82	200	0.25	500	TO-247AD
IXFR48N60P		32	0.150	8860	150	200	0.42	300	ISOPLUS247™
IXFR64N60P		36	0.105	12000	200	200	0.35	360	ISOPLUS247™
IXFH36N60P		36	0.190	5800	102	200	0.19	650	TO-247AD
IXFK36N60P		36	0.190	5800	102	200	0.19	650	TO-264
IXFT36N60P		36	0.190	5800	102	200	0.19	650	TO-268AA
IXFN48N60P		40	0.140	8860	150	200	0.20	625	SOT-227B (miniBLOC)
IXFX48N60P		48	0.135	8860	150	200	0.15	830	PLUS247
IXFK48N60P		48	0.135	8860	150	200	0.15	830	TO-264
IXFN64N60P		50	0.096	12000	200	200	0.18	700	SOT-227B (miniBLOC)
IXFL82N60P		55	0.078	23000	240	200	0.20	625	ISOPLUS264™
IXFX64N60P		64	0.096	12000	200	200	0.12	1040	PLUS247
IXFK64N60P		64	0.096	12000	200	200	0.12	1040	TO-264
IXFN82N60P		72	0.075	23000	240	200	0.12	1040	SOT-227B (miniBLOC)
IXFB82N60P		82	0.075	23000	240	200	0.10	1250	PLUS264


MOSFET




X005a
TO-220AB




X011b
TO-263AB




X014a
TO-247AD




X015a
PLUS247




X016a
ISOPLUS247™




X017a
TO-3P




X019
TO-268AA




X020a
TO-264



X021a
PLUS264




X022a
ISOPLUS264™



X022e
ISOPLUS264/i5-Pak™



X027a
SOT-227B (miniBLOC)



Polar™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q ₃ typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFP7N80P	800	7	1.440	1800	32	250	0.62	200	TO-220AB
IXFA7N80P		7	1.440	1800	32	250	0.62	200	TO-263AB
IXFR20N80P		10	0.570	4685	86	250	0.80	160	ISOPLUS247™
IXFP10N80P		10	1.100	2050	40	250	0.42	300	TO-220AB
IXFH10N80P		10	1.100	2050	40	250	0.42	300	TO-247AD
IXFA10N80P		10	1.100	2050	40	250	0.42	300	TO-263AB
IXFH12N80P		12	0.850	2800	51	250	0.35	360	TO-247AD
IXFR24N80P		13	0.420	7200	105	250	0.60	208	ISOPLUS247™
IXFH14N80P		14	0.720	3900	61	250	0.31	400	TO-247AD
IXFT14N80P		14	0.720	3900	61	250	0.31	400	TO-268AA
IXFH16N80P		16	0.600	4000	70	250	0.27	460	TO-247AD
IXFT16N80P		16	0.600	4000	70	250	0.27	460	TO-268AA
IXFR32N80P		20	0.290	8800	150	250	0.42	300	ISOPLUS247™
IXFH20N80P		20	0.520	4685	86	250	0.25	500	TO-247AD
IXFH24N80P		24	0.400	5800	100	250	0.19	650	TO-247AD
IXFK24N80P		24	0.400	7200	105	250	0.19	650	TO-264
IXFT24N80P		24	0.400	5800	100	250	0.19	650	TO-268AA
IXFR44N80P		26	0.190	12000	200	250	0.35	360	ISOPLUS247™
IXFN32N80P		29	0.270	8820	150	250	0.20	625	SOT-227B (miniBLOC)
IXFX32N80P		32	0.270	8800	150	250	0.15	830	PLUS247
IXFK32N80P		32	0.270	8800	150	250	0.15	830	TO-264
IXFN44N80P		39	0.190	18000	200	250	0.18	694	SOT-227B (miniBLOC)
IXFL60N80P		40	0.150	18000	250	250	0.20	625	ISOPLUS264™
IXFX44N80P		44	0.190	12000	198	250	0.12	1200	PLUS247
IXFK44N80P		44	0.190	12000	198	250	0.12	1200	TO-264
IXFN60N80P		53	0.140	18000	250	250	0.12	1040	SOT-227B (miniBLOC)
IXFB60N80P		60	0.140	18000	250	250	0.10	1250	PLUS264
IXFR18N90P	900	10.5	0.660	5230	97	300	0.62	200	ISOPLUS247™
IXFH12N90P		12	0.900	3080	56	300	0.33	380	TO-247AD
IXFR24N90P		13	0.460	7200	130	300	0.54	230	ISOPLUS247™
IXFH18N90P		18	0.600	5230	97	300	0.23	540	TO-247AD
IXFR40N90P		21	0.230	14000	230	300	0.42	300	ISOPLUS247™
IXFH24N90P		24	0.420	7200	130	300	0.19	660	TO-247AD
IXFT24N90P		24	0.420	7200	130	300	0.19	660	TO-268AA
IXFK32N90P		32	0.300	10600	215	300	0.13	960	TO-264
IXFX32N90P		32	0.300	10600	215	300	0.13	960	PLUS247
IXFN40N90P		33	0.21	14000	230	300	0.18	695	SOT-227B (miniBLOC)
IXFX40N90P		40	0.21	14000	230	300	0.13	960	PLUS247
IXFK40N90P		40	0.21	14000	230	300	0.13	960	TO-264
IXFN52N90P		43	0.16	19000	308	300	0.14	890	SOT-227B (miniBLOC)
IXFB52N90P		52	0.210	19000	308	300	0.13	1250	PLUS264
IXFN56N90P		56	0.210	23000	375	300	0.13	1000	SOT-227B (miniBLOC)

Polar™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFP4N100P	1000	4	0.210	1456	26	300	0.83	150	TO-220AB
IXFA4N100P		4	0.160	1456	26	300	0.83	150	TO-263AB
IXFP5N100P		5	0.160	1830	33.4	200	0.50	250	TO-220AB
IXFH5N100P		5	0.145	1830	33.4	200	0.50	250	TO-247AD
IXFA5N100P		5	3.30	1830	33.4	200	0.50	250	TO-263AB
IXFA7N100P		7	3.30	2590	47	300	0.42	300	TO-263AB
IXFH7N100P		7	2.80	2590	47	300	0.42	300	TO-247AD
IXFP7N100P		7	2.80	2590	47	300	0.42	300	TO-220AB
IXFH10N100P		10	2.80	3030	56	300	0.33	380	TO-247AD
IXFH12N100P		12	1.90	4080	80	300	0.27	463	TO-247AD
IXFR26N100P		15	1.90	11900	197	300	0.43	290	ISOPLUS247™
IXFH15N100P		15	1.40	5140	97	300	0.23	543	TO-247AD
IXFR32N100P		18	0.64	14200	225	300	0.39	320	ISOPLUS247™
IXFH20N100P		20	1.05	7300	126	300	0.19	660	TO-247AD
IXFT20N100P		20	0.43	7300	126	300	0.19	660	TO-268AA
IXFL44N100P		22	0.76	19000	305	300	0.35	357	ISOPLUS264/i5-Pak™
IXFN26N100P		23	0.34	11900	197	300	0.21	595	SOT-227B (miniBLOC)
IXFX26N100P		26	0.57	11900	197	300	0.16	780	PLUS247
IXFK26N100P		26	0.57	11900	197	300	0.16	780	TO-264
IXFN32N100P		27	0.24	14200	225	300	0.18	690	SOT-227B (miniBLOC)
IXFL38N100P		29	0.39	24000	350	300	0.24	520	ISOPLUS264/i5-Pak™
IXFX32N100P		32	0.39	14200	225	300	0.13	960	PLUS247
IXFK32N100P		32	0.39	14200	225	300	0.13	960	TO-264
IXFN44N100P		37	0.32	19000	305	300	0.14	890	SOT-227B (miniBLOC)
IXFN38N100P		38	0.23	24000	350	300	0.125	1000	SOT-227B (miniBLOC)
IXFB44N100P		44	0.32	19000	305	300	0.10	1250	PLUS264
IXFN40N110P	1100	34	0.21	19000	310	300	0.14	890	SOT-227B (miniBLOC)
IXFB40N110P		40	0.22	19000	310	300	0.10	1250	PLUS264
IXFP6N120P	1200	6	0.28	2830	92	300	0.50	250	TO-220AB
IXFH6N120P		6	0.26	2830	92	300	0.50	250	TO-247AD
IXFA6N120P		6	0.26	2830	92	300	0.50	250	TO-263AB
IXFR16N120P		9	0.26	6900	120	300	0.54	230	ISOPLUS247™
IXFH12N120P		12	2.40	5400	103	300	0.23	543	TO-247AD
IXFR20N120P		13	2.40	12900	193	300	0.43	290	ISOPLUS247™
IXFR26N120P		15	2.40	14000	225	300	0.39	320	ISOPLUS247™
IXFH16N120P		16	1.04	6900	120	300	0.19	660	TO-247AD
IXFT16N120P		16	1.35	6900	120	300	0.19	660	TO-268AA
IXFX20N120P		20	0.50	11100	193	300	0.16	780	PLUS247
IXFN20N120P		20	0.95	11100	193	300	0.21	595	SOT-227B (miniBLOC)
IXFK20N120P		20	0.95	11100	193	300	0.16	780	TO-264
IXFN26N120P		23	0.38	14000	225	300	0.18	695	SOT-227B (miniBLOC)
IXFL32N120P		24	0.57	21000	360	300	0.24	520	ISOPLUS264/i5-Pak™
IXFX26N120P		26	0.57	14000	225	300	0.13	960	PLUS247
IXFK26N120P		26	0.57	14000	225	300	0.13	960	TO-264
IXFB30N120P		30	0.46	22500	310	300	0.10	1250	PLUS264
IXFN30N120P		30	0.34	19000	310	300	0.14	890	SOT-227B (miniBLOC)
IXFN32N120P		32	0.46	21000	360	300	0.125	1000	SOT-227B (miniBLOC)

MOSFET



X005a
TO-220AB



X016a
ISOPLUS247™



X020a
TO-264



X031a
SMPD-X



X011b
TO-263AB



X016c
ISO247™




X021a
PLUS264



X011c
TO-263ABHV



X014a
TO-247AD



X017a
TO-3P



X022a
ISOPLUS264™




X015a
PLUS247



X019
TO-268AA



X027a
SOT-227B (miniBLOC)




PolarP3™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} max. (typ.)	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFP36N30P3	300	36	0.1100	2040	30	-125	0.36	347	TO-220AB
IXFA36N30P3		36	0.1100	2040	30	-125	0.36	347	TO-263AB
IXFH94N30P3		94	0.0360	5510	102	250	0.12	1040	TO-247AD
IXFQ94N30P3		94	0.0360	5510	102	250	0.12	1040	TO-3P
IXFT94N30P3		94	0.0360	5510	102	250	0.12	1040	TO-268AA
IXFL210N30P3		108	0.0160	16200	268	250	0.24	520	ISOPLUS264™
IXFK120N30P3		120	0.0270	8630	150	250	0.11	1130	TO-264
IXFX120N30P3		120	0.0270	8630	150	250	0.11	1130	PLUS247
IXFK150N30P3		150	0.0190	12100	197	250	0.10	1300	TO-264
IXFX150N30P3		150	0.0190	12100	197	250	0.10	1300	PLUS247
IXFN210N30P3	500	192	0.0145	16200	268	250	0.08	1500	SOT-227B (miniBLOC)
IXFB210N30P3		210	0.0145	16200	268	250	0.07	1890	PLUS264
IXFJ26N50P3		14	0.265	2220	42	250	0.69	180	ISO247™
IXFA16N50P3		16	0.36	1515	29	250	0.38	330	TO-263AB
IXFH16N50P3		16	0.36	1515	29	250	0.38	330	TO-247AD
IXFP16N50P3		16	0.36	1515	29	250	0.38	330	TO-220AB
IXFA20N50P3		20	0.3	1800	36	250	0.36	380	TO-263AB
IXFH20N50P3		20	0.3	1800	36	250	0.36	380	TO-247AD
IXFP20N50P3		20	0.3	1800	36	250	0.36	380	TO-220AB
IXFQ20N50P3		20	0.3	1800	36	250	0.36	380	TO-3P
IXFA26N50P3		26	0.23	2220	42	250	0.25	500	TO-263AB
IXFH26N50P3		26	0.23	2220	42	250	0.25	500	TO-247AD
IXFP26N50P3		26	0.23	2220	42	250	0.25	500	TO-220AB
IXFQ26N50P3		26	0.23	2220	42	250	0.25	500	TO-3P
IXFH34N50P3		34	0.17	3260	60	250	0.18	695	TO-247AD
IXFQ34N50P3		34	0.17	3260	60	250	0.18	695	TO-3P
IXFH60N50P3		60	0.1	6250	96	250	0.12	1040	TO-247AD
IXFQ60N50P3		60	0.1	6250	96	250	0.12	1040	TO-3P
IXFT60N50P3		60	0.1	6250	96	250	0.12	1040	TO-268AA
IXFL132N50P3		63	0.043	18600	250	250	0.24	520	ISOPLUS264™
IXFK78N50P3		78	0.068	9900	147	250	0.11	1130	TO-264
IXFX78N50P3		78	0.068	9900	147	250	0.11	1130	PLUS247
IXFK98N50P3		98	0.05	13100	197	250	0.096	1300	TO-264
IXFX98N50P3		98	0.05	13100	197	250	0.096	1300	PLUS247
IXFN132N50P3		112	0.039	18600	250	250	0.083	1500	SOT-227B (miniBLOC)
IXFB132N50P3		132	0.039	18600	250	250	0.066	1890	PLUS264

PolarP3™ HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} max. (typ.)	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFA16N60P3	600	16	0.44	1830	36	250	0.36	347	TO-263AB
IXFH16N60P3		16	0.44	1830	36	250	0.36	347	TO-247AD
IXFP16N60P3		16	0.44	1830	36	250	0.36	347	TO-220AB
IXFA22N60P3		22	0.36	2600	38	250	0.25	500	TO-263AB
IXFH22N60P3		22	0.36	2600	38	250	0.25	500	TO-247AD
IXFP22N60P3		22	0.36	2600	38	250	0.25	500	TO-220AB
IXFQ22N60P3		22	0.36	2600	38	250	0.25	500	TO-3P
IXFH28N60P3		28	0.26	3560	50	250	0.18	695	TO-247AD
IXFQ28N60P3		28	0.26	3560	50	250	0.18	695	TO-3P
IXFH42N60P3		42	0.185	5150	78	250	0.15	830	TO-247AD
IXFR80N60P3		48	0.076	13100	190	250	0.23	540	ISOPLUS247™
IXFH50N60P3		50	0.145	6300	94	250	0.12	1040	TO-247AD
IXFQ50N60P3		50	0.145	6300	94	250	0.12	1040	TO-3P
IXFT50N60P3		50	0.145	6300	94	250	0.12	1040	TO-268AA
IXFK64N60P3		64	0.095	9900	145	250	0.11	1130	TO-264
IXFX64N60P3		64	0.095	9900	145	250	0.11	1130	PLUS247
IXFN80N60P3		66	0.077	13100	190	250	0.13	960	SOT-227B (miniBLOC)
IXFK80N60P3		80	0.07	13100	190	250	0.096	1300	TO-264
IXFX80N60P3		80	0.07	13100	190	250	0.096	1300	PLUS247
IXFN110N60P3		90	0.056	18000	245	250	0.083	1500	SOT-227B (miniBLOC)
IXFB110N60P3		110	0.056	18000	245	250	0.066	1890	PLUS264



Legacy (Standard) Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTP3N120	1200	3.00	4.5	1050	39	700	0.62	200	TO-220AB
IXTH3N120		3.00	4.5	1050	39	700	0.80	100	TO-247AD
IXTA3N120		3.00	4.5	1050	39	700	0.62	200	TO-263AB
IXTA3N120HV		3.00	4.5	1050	39	700	0.62	200	TO-263ABHV
IXTH6N120		6.00	2.4	1950	56	850	0.42	300	TO-247AD
IXTT6N120		6.00	2.4	1950	56	850	0.42	300	TO-268HV
IXTA3N150HV	1500	3.00	7.3	1375	38.6	900	0.50	110	TO-263ABHV
IXTH3N150		3.00	7.3	1375	38.6	900	0.50	250	TO-247AD
IXTA4N150HV		4.00	6	1576	44.5	900	0.45	280	TO-263ABHV
IXTH4N150		4.00	6	1576	44.5	900	0.45	280	TO-247AD
IXTJ4N150		2.50	6	1576	44.5	900	1.13	110	ISO247™
IXTT4N150HV		4.00	6	1576	44.5	900	0.45	280	TO-268HV
IXTH6N150		6.00	3.5	2230	67	1500	0.23	540	TO-247AD
IXTJ6N150		3.00	3.85	2230	67	1500	1.00	125	ISO247™
IXTT6N150		6.00	3.5	2230	67	1500	0.23	540	TO-247AD
IXTT12N150HV		12	2	3720	106	1200	0.14	890	TO-268HV

MOSFET



X004
TO-252AA



X005a
TO-220AB



X007a
TO-220ABFP



X011b
TO-263AB




X012c
TO-263AB



X014a
TO-247AD



X015a
PLUS247



X017a
TO-3P




X019a
TO-268HV



X020a
TO-264



X027a
SOT-227B (miniBLOC)



Ultra Junction Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
135 V Ultra Junction X4-Class Power MOSFET									
IXTP170N13X4	135	170	0.0063	5460	105	86	0.31	480	TO-220AB
IXTH240N15X4	150	240	0.0044	8900	195	130	0.16	940	TO-247AD
IXTK400N15X4		400	0.0031	14500	430	175	0.1	1500	TO-264
IXTN400N15X4		400	0.0031	14500	430	175	0.14	1070	SOT-227B (miniBLOC)
200 V X3-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA36N20X3	200	36	0.0450	1425	21	75	0.73	170	TO-263AB
IXFP36N20X3		36	0.0450	1425	21	75	0.73	170	TO-220AB
IXFP36N20X3M		36	0.0450	1425	21	75	3.50	36	TO-220FPAB
IXFY36N20X3		36	0.0450	1425	21	75	0.73	170	TO-252AA
IXFA50N20X3		50	0.0300	2100	33	70	0.52	240	TO-263AB
IXFP50N20X3		50	0.0300	2100	33	70	0.52	240	TO-220AB
IXFP50N20X3M		50	0.0300	2100	33	70	3.70	34	TO-220FPAB
IXFA72N20X3		72	0.0200	3780	55	95	0.39	320	TO-263AB
IXFP72N20X3		72	0.0200	3780	55	95	0.39	320	TO-220AB
IXFP72N20X3M		72	0.0200	3780	55	95	3.50	36	TO-220FPAB
IXFQ72N20X3		72	0.0200	3780	55	95	0.39	320	TO-3P
IXFH90N20X3		90	0.0128	5420	78	95	0.32	390	TO-247AD
IXFP90N20X3		90	0.0128	5420	78	95	0.32	390	TO-220AB
IXFP90N20X3M		90	0.0128	5420	78	95	3.50	36	TO-220FPAB
IXFQ90N20X3		90	0.0128	5420	78	95	0.32	390	TO-3P
200 V X3-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFH140N20X3	200	140	0.0096	7660	127	105	0.26	480	TO-247AD
IXFQ140N20X3		140	0.0096	7660	127	105	0.26	480	TO-3P
IXFT140N20X3HV		140	0.0096	7660	127	105	0.26	480	TO-268HV
IXFN220N20X3		160	0.0062	13600	204	128	0.32	390	SOT-227B (miniBLOC)
IXFH180N20X3		180	0.0075	10300	154	120	0.17	735	TO-247AD
IXFT180N20X3HV		180	0.0075	10300	154	120	0.17	735	TO-268HV
IXFH220N20X3		220	0.0062	13600	204	128	0.14	890	TO-247AD
IXFK220N20X3		220	0.0062	13600	204	128	0.14	890	TO-264
IXFT220N20X3HV		220	0.0062	13600	204	128	0.14	890	TO-268HV
IXFK300N20X3		300	0.0040	23800	375	172	0.10	1250	TO-264
IXFN300N20X3		300	0.0035	23800	375	172	0.18	695	SOT-227B (miniBLOC)
IXFX300N20X3		300	0.0040	23800	375	172	0.10	1250	PLUS247

Ultra Junction Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
200V Ultra Junction X4-Class Power MOSFET									
IXTP60N20X4	200	60	0.021	2450	33	107	0.6	250	TO-220AB
IXTH60N20X4		60	0.021	2450	33	107	0.6	250	TO-247AD
IXTA60N20X4		60	0.021	2450	33	107	0.6	250	TO-263AB
IXTA86N20X4		86	0.013	2250	70	96	0.5	300	TO-263AB
IXTP86N20X4		86	0.013	2250	70	96	0.5	300	TO-220AB
IXTG86N20X4		86	0.0135	4030	59	96	0.5	300	TOLL
IXTA94N20X4		94	0.0106	5050	77	130	0.42	360	TO-263AB
IXTP94N20X4		94	0.0106	5050	77	130	0.42	360	TO-220AB
IXTH94N20X4		94	0.0106	5050	77	130	0.42	360	TO-247AD
IXTH120N20X4		120	0.0095	6100	108	190	0.36	417	TO-247AD
IXTP120N20X4		120	0.0095	6100	108	190	0.36	417	TO-220AB
IXTR400N20X4		210	0.0039	27700	348	270	0.36	417	ISOPLUS247
IXTH220N20X4		220	0.0055	12300	157	140	0.19	800	TO-247AD
IXTT220N20X4HV		220	0.0055	12300	157	140	0.19	800	TO-268HV
IXTN400N20X4		340	0.003	27700	348	270	0.18	830	SOT-227B (miniBLOC)
IXTX400N20X4		400	0.0033	27700	348	270	0.11	1360	PLUS247
IXTB500N20X4		500	0.00265	41500	535	250	0.096	1560	PLUS264
IXTN500N20X4		500	0.00199	41500	535	250	0.13	1150	SOT-227B (miniBLOC)
IXTG86N20X4		86	0.0135	4030	59	96	0.5	300	TOLL
IXTX400N20X4		400	0.0033	27700	348	270	0.11	1360	PLUS247
IXTR400N20X4		210	0.0039	27700	348	270	0.36	417	ISOPLUS247
IXTN400N20X4		340	0.003	27700	348	270	0.18	830	SOT-227B (miniBLOC)
IXTB500N20X4		500	0.00265	41500	535	250	0.096	1560	PLUS264
IXTN500N20X4		500	0.00199	41500	535	250	0.13	1150	SOT-227B (miniBLOC)
250V X3-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA30N25X3	250	30	0.0600	1450	21	82	0.73	170	TO-263AB
IXFP30N25X3		30	0.0600	1450	21	82	0.73	170	TO-220AB
IXFP30N25X3M		30	0.0600	1450	21	82	3.50	36	TO-220FPAB
IXFY30N25X3		30	0.0600	1450	21	82	0.73	170	TO-252AA
IXFA44N25X3		44	0.0400	2200	33	87	0.52	240	TO-263AB
IXFJ80N25X3		44	0.0180	5430	83	120	1.20	104	X016c
IXFP44N25X3		44	0.0400	2200	33	87	0.52	240	TO-220AB
IXFP44N25X3M		44	0.0400	2220	33	87	3.70	34	TO-220FPAB
IXFA60N25X3		60	0.0230	3610	50	95	0.39	320	TO-263AB
IXFP60N25X3		60	0.0230	3610	50	95	0.39	320	TO-220AB
IXFP60N25X3M		60	0.0230	3610	50	95	3.50	36	TO-220FPAB
IXFQ60N25X3		60	0.0230	3610	50	95	0.39	320	TO-3P
IXFA80N25X3 ²		80	0.0160	5430	83	120	0.32	390	TO-263AB
IXFH80N25X3		80	0.0160	5430	83	120	0.32	390	TO-247AD
IXFP80N25X3		80	0.0160	5430	83	120	0.32	390	TO-220AB
IXFQ80N25X3		80	0.0160	5430	83	120	0.32	390	TO-3P
IXFH120N25X3		120	0.0120	7870	122	140	0.26	480	TO-247AD
IXFQ120N25X3		120	0.0120	7870	122	140	0.26	480	TO-3P
IXFT120N25X3HV		120	0.0120	7870	122	140	0.26	480	TO-268HV
IXFH150N25X3		150	0.0090	10400	154	140	0.17	735	TO-247AD
IXFT150N25X3HV		150	0.0090	10400	154	140	0.17	735	TO-268HV
IXFH170N25X3		170	0.0074	13500	190	140	0.14	890	TO-247AD
IXFK170N25X3		170	0.0074	13500	190	140	0.14	890	TO-264
IXFN170N25X3		170	0.0074	13500	190	135	0.32	390	SOT-227B (miniBLOC)
IXFT170N25X3HV		170	0.0074	13500	190	140	0.14	890	TO-268HV
IXFK240N25X3		240	0.0050	23800	345	177	0.10	1250	TO-264
IXFN240N25X3		240	0.0045	23800	345	165	0.18	695	SOT-227B (miniBLOC)
IXFX240N25X3		240	0.0050	23800	345	177	0.10	1250	PLUS247

MOSFET



X004
TO-252AA



X005a
TO-220AB



X007a
TO-220FPAB



X011b
TO-263AB




X014a
TO-247AD



X015a
PLUS247



X016a
ISOPLUS247™



X017a
TO-3P




X019a
TO-268HV



X020a
TO-264



X027a
SOT-227B (miniBLOC)



Ultra Junction Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
300 V X3-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA26N30X3	300	26	0.0660	1465	22	105	0.73	170	TO-263AB
IXFP26N30X3		26	0.0660	1465	22	105	0.73	170	TO-220AB
IXFY26N30X3		26	0.0660	1465	22	105	0.73	170	TO-252AA
IXFA38N30X3		38	0.0500	2240	35	90	0.52	240	TO-263AB
IXFP38N30X3		38	0.0500	2240	35	90	0.52	240	TO-220AB
IXFP38N30X3M		38	0.0500	2440	35	90	3.70	34	TO-220FPAB
IXFA56N30X3		56	0.0270	3750	56	115	0.39	320	TO-263AB
IXFH56N30X3		56	0.0270	3750	56	115	0.39	320	TO-247AD
IXFP56N30X3		56	0.0270	3750	56	115	0.39	320	TO-220AB
IXFP56N30X3M		56	0.0270	3750	56	115	3.50	36	TO-220FPAB
IXFH72N30X3		72	0.0190	5400	82	100	0.32	390	TO-247AD
IXFP72N30X3		72	0.0190	5400	82	100	0.32	390	TO-220AB
IXFP72N30X3M		72	0.0190	5400	82	100	3.50	36	TO-220FPAB
IXFQ72N30X3		72	0.0190	5400	82	100	0.32	390	TO-3P
IXFH100N30X3		100	0.0135	7660	122	130	0.26	48	TO-247AD
IXFT100N30X3HV		100	0.0135	7660	122	130	0.26	480	TO-268HV
IXFH120N30X3		120	0.0110	10500	170	145	0.17	735	TO-247AD
IXFT120N30X3HV		120	0.0110	10500	170	145	0.17	735	TO-268HV
IXFH150N30X3		150	0.0083	13100	254	167	0.14	890	TO-247AD
IXFK150N30X3		150	0.0083	13100	254	167	0.14	890	TO-264
IXFT150N30X3HV		150	0.0083	13100	254	167	0.14	890	TO-268HV
IXFK210N30X3		210	0.0055	24200	375	190	0.10	1250	TO-264
IXFN210N30X3		210	0.0046	24200	375	190	0.18	695	SOT-227B (miniBLOC)
IXFX210N30X3		210	0.0055	24200	375	190	0.10	1250	PLUS247

Ultra Junction Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
650V X2-Class Power MOSFET									
IXTP2N65X2	650	2	2.300	180	4.3	137	2.27	55	TO-220AB
IXTY2N65X2		2	2.300	180	4.3	137	2.27	55	TO-252AA
IXTA4N65X2		4	0.850	455	8.3	160	1.56	80	TO-263AB
IXTP4N65X2		4	0.850	455	8.3	160	1.56	80	TO-220AB
IXTY4N65X2		4	0.850	455	8.3	160	1.56	80	TO-252AA
IXTA8N65X2		8	0.500	800	12	200	0.83	150	TO-263AB
IXTP8N65X2		8	0.500	800	12	200	0.83	150	TO-220AB
IXTP8N65X2M		8	0.550	800	12	200	3.90	32	TO-220FPAB
IXTY8N65X2		8	0.500	800	12	200	0.83	150	TO-252AA
IXTA12N65X2		12	0.300	1100	17.7	270	0.69	180	TO-263AB
IXTH12N65X2		12	0.300	1100	17.7	270	0.69	180	TO-247AD
IXTP12N65X2		12	0.300	1100	17.7	270	0.69	180	TO-220AB
IXTP12N65X2M		12	0.300	1100	17.7	270	3.10	40	TO-220FPAB
IXTA20N65X2		20	0.185	1450	27	350	0.43	290	TO-263AB
IXTH20N65X2		20	0.185	1450	27	350	0.43	290	TO-247AD
IXTP20N65X2		20	0.185	1450	27	350	0.43	290	TO-220AB
IXTP20N65X2M		20	0.185	1450	27	350	3.50	36	TO-220FPAB
IXTA24N65X2		24	0.145	2060	36	390	0.32	390	TO-263AB
IXTH24N65X2		24	0.145	2060	36	390	0.32	390	TO-247AD
IXTP24N65X2		24	0.145	2060	36	390	0.32	390	TO-220AB
IXTP24N65X2M		24	0.145	2060	36	390	3.37	37	TO-220FPAB
IXTA30N65X2		30	0.120	2260	44	355	0.27	460	TO-263AB
IXTP30N65X2		30	0.120	2260	44	355	0.27	460	TO-247AD
IXTH30N65X2		30	0.120	2260	44	355	0.27	460	TO-247AD
IXTA34N65X2		34	0.096	3000	54	390	0.23	540	TO-263AB
IXTA34N65X2		34	0.096	3000	54	390	0.23	540	TO-263AB
IXTH34N65X2		34	0.096	3000	54	390	0.23	540	TO-247AD
IXTP34N65X2		34	0.096	3000	54	390	0.23	540	TO-220AB
IXTT34N65X2HV		34	0.096	3000	54	390	0.23	540	TO-268HV
IXTH48N65X2		48	0.065	4300	76	400	0.19	660	TO-247AD
IXTR102N65X2		54	0.033	10900	152	450	0.38	330	ISOPLUS247™
IXTH62N65X2		62	0.050	5800	100	445	0.16	780	TO-247AD
IXTN102N65X2	76	0.030	10900	152	450	0.21	595	SOT-227B (miniBLOC)	
IXTH80N65X2	80	0.038	7800	137	465	0.14	890	TO-247AD	
IXTK102N65X2	102	0.030	10900	152	450	0.12	1040	TO-264	
IXTX102N65X2	102	0.030	10900	152	450	0.12	1040	PLUS247	
IXTK120N65X2	120	0.023	13600	230	505	0.10	1250	TO-264	
IXTQ34N65X2M	34	0.096	3000	54	390	2.9	43	TO-3P	
IXTQ48N65X2M	48	0.065	4300	76	400	1.78	70	TO-3P	
650V X2-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA8N65X2	650	8	0.45	790	11	105	0.83	150	TO-263AB
IXFP8N65X2		8	0.45	790	11	105	0.83	150	TO-220AB
IXFY8N65X2		8	0.45	790	11	105	0.83	150	TO-252AA
IXFA12N65X2		12	0.31	1134	18.5	155	0.69	180	TO-263AB
IXFH12N65X2		12	0.31	1134	18.5	155	0.69	180	TO-247AD
IXFP12N65X2		12	0.31	1134	18.5	155	0.69	180	TO-220AB
IXFP12N65X2M		12	0.31	1134	18.5	155	3.10	40	TO-220FPAB
IXFA18N65X2		18	0.2	1520	29	135	0.43	290	TO-263AB
IXFH18N65X2		18	0.2	1520	29	135	0.43	290	TO-247AD
IXFP18N65X2		18	0.2	1520	29	135	0.43	290	TO-220AB
IXFP18N65X2M		18	0.2	1520	29	135	3.50	36	TO-220FPAB
IXFA22N65X2		22	0.145	2190	37	145	0.32	390	TO-263AB
IXFH22N65X2		22	0.145	2190	37	145	0.32	390	TO-247AD
IXFP22N65X2		22	0.145	2190	37	145	0.32	390	TO-220AB
IXFP22N65X2M		22	0.145	2190	37	145	3.37	37	TO-220FPAB

MOSFET

X003
TO-251AA

X004
TO-252AA

X005a
TO-220AB

X007a
TO-220FPAB

X011b
TO-263AB

L014d
TO-247-4L

X011c
TO-263ABHV

X014a
TO-247AD

X015a
PLUS247

X016c
ISO247™


X017a
TO-3P

X019a
TO-268HV

X020a
TO-264

X021a
PLUS264

X027a
SOT-227B (miniBLOC)



Ultra Junction Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
650V X2-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA34N65X2	650	34	0.100	3230	56	164	0.23	540	TO-263AB
IXFH34N65X2		34	0.100	3230	56	164	0.23	540	TO-247AD
IXFP34N65X2		34	0.100	3230	56	164	0.23	540	TO-220AB
IXFP34N65X2M		34	0.100	3230	56	164	3.10	40	TO-220FPAB
IXFA34N65X3		34	0.100	2025	29	150	0.28	446	TO-263AB
IXFP34N65X3		34	0.100	2025	29	150	0.28	446	TO-220AB
IXFH34N65X3		34	0.100	2025	29	150	0.28	446	TO-247AD
IXFH46N65X3		46	0.073	2730	40	165	0.24	520	TO-247AD
IXFH46N65X2		46	0.069	4570	98	180	0.19	660	TO-247AD
IXFH54N65X3		54	0.059	3360	49	140	0.2	625	TO-247AD
IXFH60N65X2		60	0.052	6300	108	180	0.16	780	TO-247AD
IXFH60N65X2-4		60	0.052	6300	108	180	0.16	780	TO-247-4L
IXFT60N65X2HV		60	0.052	6300	108	180	0.16	780	TO-268HV
IXFH70N65X3		70	0.044	4600	66	165	0.16	780	TO-247AD
IXFN100N65X2		78	0.030	10800	183	200	0.21	595	SOT-227B (miniBLOC)
IXFH80N65X2		80	0.038	8300	140	200	0.14	890	TO-247AD
IXFH80N65X2-4		80	0.038	8300	140	200	0.14	890	TO-247-4L
IXFK80N65X2		80	0.038	8300	140	200	0.14	890	TO-264
IXFT80N65X2HV		80	0.038	8300	140	200	0.14	890	TO-268HV
IXFH90N65X3		90	0.033	6080	95	175	0.13	960	TO-247AD
IXFK100N65X2		100	0.030	10800	183	200	0.12	1040	TO-264
IXFX100N65X2		100	0.030	10800	183	200	0.12	1040	PLUS247
IXFN120N65X2		108	0.024	14000	240	220	0.14	890	SOT-227B (miniBLOC)
IXFK120N65X2		120	0.024	14000	240	220	0.10	1250	TO-264
IXFX120N65X2		120	0.024	14000	240	220	0.10	1250	PLUS247
IXFN150N65X2		145	0.017	21000	355	260	0.12	1040	SOT-227B (miniBLOC)
IXFB150N65X2		150	0.017	21000	355	260	0.08	1560	PLUS264
IXFN170N65X2		170	0.013	27000	434	270	0.11	1170	SOT-227B (miniBLOC)
650V X3-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA34N65X3	650	34	0.1	2025	29	150	0.28	446	TO-263AB
IXFP34N65X3		34	0.1	2025	29	150	0.28	446	TO-220AB
IXFH34N65X3		34	0.1	2025	29	150	0.28	446	TO-247AD
IXFH46N65X3		46	0.073	2730	40	165	0.24	520	TO-247AD
IXFH54N65X3		54	0.059	3360	49	140	0.2	625	TO-247AD
IXFH70N65X3		70	0.044	4600	66	165	0.16	780	TO-247AD
IXFH90N65X3		90	0.033	6080	95	175	0.13	960	TO-247AD


Ultra Junction Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTA4N70X2	700	4	0.850	386	11.8	186	1.56	80	TO-263AB
IXTP4N70X2		4	0.850	386	11.8	186	1.56	80	TO-220AB
IXTP4N70X2M		4	0.850	386	11.8	186	4.16	30	TO-220FPAB
IXTU4N70X2		4	0.850	386	11.8	186	1.56	80	TO-251AA
IXTY4N70X2		4	0.850	386	11.8	186	1.56	80	TO-252AA
IXTA8N70X2		8	0.500	800	12	200	0.83	150	TO-263AB
IXTP8N70X2		8	0.500	800	12	200	0.83	150	TO-220AB
IXTP8N70X2M		8	0.550	800	12	200	3.90	32	TO-220FPAB
IXTU8N70X2		8	0.500	800	12	200	0.83	150	TO-251AA
IXTY8N70X2		8	0.500	800	12	200	0.83	150	TO-252AA
IXTA12N70X2		12	0.300	960	19	270	0.69	180	TO-263AB
IXTH12N70X2		12	0.300	960	19	270	0.69	180	TO-247AD
IXTP12N70X2		12	0.300	960	19	270	0.69	180	TO-220AB
IXTP12N70X2M	12	0.300	960	19	270	3.10	40	TO-220FPAB	
850 V X-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFA4N85X	850	3.5	2.500	247	7	170	0.830	150	TO-263AB
IXFP4N85X		3.5	2.500	247	7	170	0.830	150	TO-220AB
IXFP4N85XM		3.5	2.500	247	7	170	3.570	35	TO-220FPAB
IXFY4N85X		3.5	2.500	247	7	170	0.830	150	TO-252AA
IXFA8N85XHV		8	0.850	654	17	125	0.630	200	TO-263ABHV
IXFP8N85X		8	0.850	654	17	125	0.630	200	TO-220AB
IXFP8N85XM		8	0.850	654	17	125	3.780	33	TO-220FPAB
IXFQ8N85X		8	0.850	654	17	125	0.630	200	TO-3P
IXFJ20N85X		9.5	0.360	1660	63	190	1.130	110	ISO247™
IXFA14N85XHV		14	0.550	1043	30	116	0.270	460	TO-263ABHV
IXFH14N85X		14	0.550	1043	30	116	0.270	460	TO-247AD
IXFP14N85X		14	0.550	1043	30	116	0.270	460	TO-220AB
IXFP14N85XM		14	0.550	1043	30	116	3.300	38	TO-220FPAB
IXFA20N85XHV		20	0.330	1660	63	190	0.230	540	TO-263ABHV
IXFH20N85X		20	0.330	1660	63	190	0.230	540	TO-247AD
IXFP20N85X		20	0.330	1660	63	190	0.230	540	TO-220AB
IXFH30N85X		30	0.230	2460	68	160	0.180	695	TO-247AD
IXFT30N85XHV		30	0.230	2460	68	160	0.180	695	TO-268HV
IXFH40N85X		40	0.145	3700	98	200	0.145	860	TO-247AD
IXFT40N85XHV		40	0.145	3700	98	200	0.145	860	TO-268HV
IXFH50N85X		50	0.105	4480	152	218	0.140	890	TO-247AD
IXFK50N85X		50	0.105	4480	152	218	0.140	890	TO-264
IXFT50N85XHV		50	0.105	4480	152	218	0.140	890	TO-268HV
IXFN66N85X		65	0.065	8900	230	250	0.150	830	SOT-227B (miniBLOC)
IXFK66N85X		66	0.065	8900	230	250	0.100	1250	TO-264
IXFX66N85X		66	0.065	8900	230	250	0.100	1250	PLUS247
IXFB90N85X		90	0.041	13300	340	250	0.070	1785	PLUS264
IXFN90N85X	90	0.041	13300	340	250	0.104	1200	SOT-227B (miniBLOC)	
IXFN110N85X	110	0.033	17000	425	205	0.107	1170	SOT-227B (miniBLOC)	
1000 V X-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)									
IXFH26N100X	1000	26	0.32	3290	113	220	0.145	860	TO-247AD
IXFT26N100XHV		26	0.32	3290	113	220	0.145	860	TO-268HV
IXFH32N100X		32	0.22	4075	130	200	0.140	890	TO-247AD
IXFK32N100X		32	0.22	4075	130	200	0.140	890	TO-264
IXFT32N100XHV		32	0.22	4075	130	200	0.140	890	TO-268HV
IXFN52N100X		44	0.125	6725	245	260	0.150	830	SOT-227B (miniBLOC)
IXFK52N100X		52	0.125	6725	245	260	0.100	1250	TO-264
IXFX52N100X		52	0.125	6725	245	260	0.100	1250	PLUS247
IXFN70N100X		65	0.089	9150	350	310	0.104	1200	SOT-227B (miniBLOC)
IXFB70N100X		70	0.089	9160	350	310	0.070	1785	PLUS264
IXFN74N100X		74	0.0660	17000	425	290	0.107	1170	SOT-227B (miniBLOC)

Q3-Class HiPerFET™ (Power MOSFET with Fast Intrinsic Diode)

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} max. (typ.)	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXFH70N20Q3	200	70	0.040	3150	67	250	0.18	690	TO-247AD
IXFT70N20Q3		70	0.040	3150	67	250	0.18	690	TO-268AA
IXFH50N30Q3	300	50	0.080	3160	65	250	0.18	690	TO-247AD
IXFT50N30Q3		50	0.080	3160	65	250	0.18	690	TO-268AA
IXFT70N30Q3		70	0.054	4735	98	250	0.15	830	TO-268AA
IXFH70N30Q3		70	0.054	4735	98	250	0.15	830	TO-247AD
IXFR44N50Q3	500	25	0.154	4800	93	250	0.41	300	ISOPLUS247™
IXFT30N50Q3		30	0.200	3200	62	250	0.18	690	TO-268AA
IXFH30N50Q3		30	0.200	3200	62	250	0.18	690	TO-247AD
IXFH44N50Q3		44	0.140	4800	93	250	0.15	830	TO-247AD
IXFT44N50Q3		44	0.140	4800	93	250	0.15	830	TO-268AA
IXFR64N50Q3		45	0.094	6950	145	250	0.25	500	ISOPLUS247™
IXFR80N50Q3		50	0.072	10000	200	250	0.22	570	ISOPLUS247™
IXFN80N50Q3		63	0.065	10000	200	250	0.16	780	SOT-227B (miniBLOC)
IXFK64N50Q3		64	0.085	6950	145	250	0.13	1000	TO-264
IXFX64N50Q3		64	0.085	6950	145	250	0.13	1000	PLUS247
IXFX80N50Q3		80	0.065	10000	200	250	0.10	1250	PLUS247
IXFK80N50Q3		80	0.065	10000	200	250	0.10	1250	TO-264
IXFN100N50Q3		82	0.049	13800	255	250	0.13	960	SOT-227B (miniBLOC)
IXFB100N50Q3		100	0.049	13800	255	250	0.08	1560	PLUS264
IXFR48N60Q3		32	0.154	7020	140	300	0.25	500	ISOPLUS247™
IXFR64N60Q3	600	42	0.104	9930	190	300	0.22	568	ISOPLUS247™
IXFK48N60Q3		48	0.140	7020	140	300	0.13	1000	TO-264
IXFX48N60Q3		48	0.140	7020	140	300	0.13	1000	PLUS247
IXFK64N60Q3		64	0.095	9930	190	300	0.10	1250	TO-264
IXFX64N60Q3		64	0.095	9930	190	300	0.10	1250	PLUS247
IXFN82N60Q3		66	0.075	13500	275	300	0.13	960	SOT-227B (miniBLOC)
IXFB82N60Q3		82	0.075	13500	275	300	0.08	1560	PLUS264
IXFR32N80Q3		24	0.300	6940	140	300	0.25	500	ISOPLUS247™
IXFK32N80Q3	800	32	0.270	6940	140	300	0.125	1000	TO-264
IXFX32N80Q3		32	0.270	6940	140	300	0.125	1000	PLUS247
IXFN44N80Q3		37	0.190	10950	185	300	0.16	780	SOT-227B (miniBLOC)
IXFX44N80Q3		44	0.190	10950	185	300	0.10	1250	PLUS247
IXFK44N80Q3		44	0.190	10950	185	300	0.10	1250	TO-264
IXFN62N80Q3		49	0.140	13600	270	300	0.13	960	SOT-227B (miniBLOC)
IXFB62N80Q3		62	0.140	13600	270	300	0.08	1560	PLUS264
IXFR15N100Q3		10	1.200	3250	64	250	0.31	400	ISOPLUS247™
IXFT15N100Q3	1000	15	1.050	3250	64	250	0.18	690	TO-268AA
IXFH15N100Q3		15	1.050	3250	64	250	0.18	690	TO-247AD
IXFH18N100Q3		18	0.660	4890	90	300	0.15	830	TO-247AD
IXFT18N100Q3		18	0.660	4890	90	300	0.15	830	TO-268AA
IXFR24N100Q3		18	0.490	7200	140	300	0.25	500	ISOPLUS247™
IXFR32N100Q3		23	0.350	10900	195	300	0.22	570	ISOPLUS247™
IXFK24N100Q3		24	0.440	7200	140	300	0.125	1000	TO-264
IXFX24N100Q3		24	0.440	7200	140	300	0.125	1000	PLUS247
IXFN32N100Q3		28	0.320	10900	195	300	0.16	780	SOT-227B (miniBLOC)
IXFK32N100Q3		32	0.320	10900	195	250	0.10	1250	TO-264
IXFX32N100Q3		32	0.320	10900	195	250	0.10	1250	PLUS247
IXFN44N100Q3		38	0.220	13600	264	300	0.13	960	SOT-227B (miniBLOC)
IXFB44N100Q3		44	0.220	13600	264	300	0.08	1560	PLUS264
IXFN40N110Q3		35	0.260	14000	300	-434	0.13	960	SOT-227B (miniBLOC)
IXFB40N110Q3	1100	40	0.260	14000	300	-434	0.08	1560	PLUS264


Littelfuse SiC MOSFETs offer a rewarding alternative to traditional Si-based power transistor devices. The MOSFET device structure enables lower per-cycle switching losses and improved light-load efficiency when compared to similarly rated IGBTs. Inherent material properties allow the SiC MOSFET to outclass its Si MOSFET counterparts in terms of blocking voltage, specific on resistances, and junction capacitances.



SiC MOSFET

Part Number	V_{DS}	I_D $T_C = 25\text{ }^\circ\text{C}$	$R_{DS(on)}$ typ. $T_J = 25\text{ }^\circ\text{C}$	C_{iss} typ.	Q_g typ.	R_{thJC}	Package
	V	A	mΩ	pF	nC	K/W	
IXSA110N65L2-7TR	650	110	25	3090	125	0.25	TO263-7
IXSA40N65L2-7TR	650	40	60	1218	64	0.86	TO263-7
IXSA60N65L2-7TR	650	60	40	2000	95	0.6	TO263-7
IXSG110N65L2K	650	110	25	3090	125	0.25	TOLL
IXSG40N65L2K	650	40	60	1218	64	0.86	TOLL
IXSG60N65L2K	650	60	40	2000	95	0.6	TOLL
IXSH100N65L2KHV	650	100	25	3090	125	0.33	TO247-4
IXSH40N65L2KHV	650	40	60	1218	64	0.86	TO247-4
IXSH60N65L2KHV	650	60	40	2000	95	0.6	TO247-4
IXSA40N120L2-7TR	1200	40	80	1160	53	0.6	TO263-7
IXSA80N120L2-7TR	1200	80	30	3000	135	0.38	TO263-7
IXSH40N120L2KHV	1200	40	80	1214	53	0.6	TO247-4
IXSH80N120L2KHV	1200	80	30	3000	135	0.38	TO247-4
IXSH100N120L3KHV	1200	102	21	3450	130	0.37	TO-247-4L
IXSH110N120L3KHV	1200	112	18	3840	149	0.36	TO-247-4L
IXSA20N120L2-7TR	1200	20	160	580	29	1.1	TO263-7
IXSA65N120L2-7TR	1200	65	40	2160	110	0.36	TO263-7
IXSH150N120L3KHV	1200	150	13	4774	187	0.27	TO247-4
IXSH20N120L2KHV	1200	20	160	580	29	1.1	TO247-4
IXSH50N120L3KHV	1200	50	55	1340	55	0.6	TO-247-4L
IXSH65N120L3KHV	1200	67	35	2082	83	0.52	TO-247-4L
LSIC1MO170E0750	1700	5	750	200	15	2.3	TO-247 AD
LSIC1MO170T0750	1700	5	750	200	15	2.3	TO-263 (7)
LSIC1MO170H0750	1700	5	750	200	15	2.3	TO-268AA (HV)
Isolated Package							
IXSJ80N120R1	1200	80	18	4522	154	0.55	ISO247-3
IXSJ43N120R1	1200	43	36	2453	79	0.90	
IXSJ25N120R1	1200	25	62	1435	52	1.66	
IXSJ80N120R1K	1200	80	18	4522	154	0.55	ISO247-4
IXSJ43N120R1K	1200	43	36	2453	79	0.90	
IXSJ25N120R1K	1200	25	62	1451	49	1.57	


MOSFET




X014a
TO-247AD




X019
TO-268AA



X021a
PLUS264




X015a
PLUS247




X020a
TO-264



X027a
SOT-227B (miniBLOC)



X017a
TO-3P



Linear L™ Power MOSFET with Extended FBSOAs

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTH80N20L	200	80	0.032	6160	180	250	0.24	520	TO-247AD
IXTT80N20L		80	0.032	6160	180	250	0.24	520	TO-268AA
IXTN46N50L	500	46	0.16	7000	260	600	0.18	700	SOT-227B (miniBLOC)
IXTK46N50L		46	0.16	7000	260	600	0.18	700	TO-264
IXTX46N50L		46	0.16	7000	260	600	0.18	700	PLUS247
IXTH24N50L		24	0.3	2500	160	500	0.31	400	TO-247AD
IXTN30N100L	1000	30	0.45	13700	545	1000	0.156	800	SOT-227B (miniBLOC)
IXTB30N100L		30	0.45	13700	545	1000	0.156	800	PLUS264
IXTN22N100L		22	0.6	7050	270	1000	0.18	700	SOT-227B (miniBLOC)
IXTK22N100L		22	0.6	7050	270	1000	0.18	700	TO-264
IXTX22N100L		22	0.6	7050	270	1000	0.18	700	PLUS247
IXTH12N100L		12	1.3	2500	155	1000	0.31	400	TO-247AD
IXTH4N100L		4	2.8	1496	75	1100	0.43	290	TO-247AD
IXTK17N120L		17.00	0.9	8300.00	155	1830	0.18	700	TO-264
IXTX17N120L	1200	17.00	0.9	8300.00	155	1830	0.18	700	PLUS247
IXTN17N120L		15.0	0.9	8300.00	155	1830	0.23	540	SOT-227B (miniBLOC)
IXTK8N150L	1500	8.00	3.6	8000.00	250	1700	0.18	700	TO-264
IXTX8N150L		8.00	3.6	8000.00	250	1700	0.18	700	PLUS247
IXTN8N150L		7.50	3.6	8000.00	250	1700	0.23	545	SOT-227B (miniBLOC)
IXTH2N150L		2.00	15	1470.00	72	1860	0.43	290	TO-247AD
IXTN3N250L	2500	3.00	0.0083	5400.00	230	370	0.36	347	SOT-227B (miniBLOC)
IXTK3N250L		3.00	0.0083	5400.00	230	370	0.3	471	TO-264
IXTX3N250L		3.00	0.0083	5400.00	230	370	0.3	417	PLUS247

Linear L2™ Power MOSFET With Extended FBSOAs

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IOTP80N075L2	75	80	0.024	3600	103	160	0.35	357	TO-220AB
IXTA80N075L2		80	0.024	3600	103	160	0.35	357	TO-263AB
IXTH80N075L2		80	0.024	3600	103	160	0.35	357	TO-247AD
IXTH140N075L2		140	0.011	9300	275	200	0.23	540	TO-247AD
IXTT140N075L2HV		140	0.011	9300	275	200	0.23	540	TO-268HV
IXTN240N075L2		225	0.007	19000	546	206	0.17	735	SOT-227B (miniBLOC)
IXTK240N075L2		240	0.007	19000	546	206	0.13	960	TO-264
IXTX240N075L2		240	0.007	19000	546	206	0.13	960	PLUS247
IXTA64N10L2	100	64	0.032	3620	100	180	0.35	357	TO-263AB
IXTH64N10L2		64	0.032	3620	100	180	0.35	357	TO-247AD
IOTP64N10L2		64	0.032	3620	100	180	0.35	357	TO-220AB
IXTH75N10L2		75	0.021	8100	215	180	0.31	400	TO-247AD
IXTT75N10L2		75	0.021	8100	215	180	0.31	400	TO-268AA
IXTH110N10L2		110	0.018	10500	260	230	0.21	600	TO-247AD
IXTT110N10L2		110	0.018	10500	260	230	0.21	600	TO-268AA
IXTN200N10L2		178	0.011	23000	540	245	0.15	830	SOT-227B (miniBLOC)
IXTX200N10L2	200	200	0.011	23000	540	245	0.12	1040	PLUS247
IXTK200N10L2		200	0.011	23000	540	245	0.12	1040	TO-264
IXTH60N20L2		60	0.045	10500	255	330	0.23	540	TO-247AD
IXTT60N20L2		60	0.045	10500	255	330	0.23	540	TO-268AA
IXTQ60N20L2		60	0.045	10500	255	330	0.23	540	TO-3P
IXTN110N20L2		100	0.024	23000	500	420	0.17	735	SOT-227B (miniBLOC)
IXTX110N20L2		110	0.024	23000	500	420	0.13	960	PLUS247
IXTK110N20L2		110	0.024	23000	500	420	0.13	960	TO-264
IXTA30N25L2	250	30	0.140	3200	130	315	0.35	355	TO-263AB
IXTH30N25L2		30	0.140	3200	130	315	0.35	355	TO-247AD
IOTP30N25L2		30	0.140	3200	130	315	0.35	355	TO-220AB
IXTH44N25L2		44	0.075	5740	256	366	0.31	400	TO-247AD
IXTT44N25L2HV		44	0.075	5740	256	366	0.31	400	TO-268AA
IXTH58N25L2		58	0.064	9200	330	400	0.23	540	TO-247AD
IXTX90N25L2		90	0.033	23000	640	266	0.13	960	PLUS247
IXTN90N25L2		90	0.033	23000	640	266	0.17	735	SOT-227B (miniBLOC)
IXTK90N25L2	300	90	0.033	23000	640	266	0.13	960	TO-264
IXTH38N30L2		38	0.100	7200	260	420	0.31	400	TO-247AD
IXTT38N30L2HV		38	0.100	7200	260	420	0.31	400	TO-268AA
IXTH50N30L2		50	0.072	9300	330	430	0.23	540	TO-247AD
IXTK80N30L2		80	0.038	19100	660	485	0.13	960	TO-264
IXTN80N30L2		80	0.038	19100	660	485	0.17	735	SOT-227B (miniBLOC)
IXTX80N30L2		80	0.038	19100	660	485	0.13	960	PLUS247
IXTA15N50L2	500	15	0.480	4080	123	570	0.42	300	TO-263AB
IOTP15N50L2		15	0.480	4080	123	570	0.42	300	TO-220AB
IXTH15N50L2		15	0.480	4080	123	570	0.42	300	TO-247AD
IXTH30N50L2		30	0.200	8100	240	500	0.31	400	TO-247AD
IXTT30N50L2		30	0.200	8100	240	500	0.31	400	TO-268AA
IXTQ30N50L2		30	0.200	8100	240	500	0.31	400	TO-3P
IXTH40N50L2		40	0.170	10400	320	500	0.23	540	TO-247AD
IXTT40N50L2		40	0.170	10400	320	500	0.23	540	TO-268AA
IXTQ40N50L2		40	0.170	10400	320	500	0.23	540	TO-3P
IXTN60N50L2		53	0.100	24000	610	980	0.17	735	SOT-227B (miniBLOC)
IXTX60N50L2		60	0.100	24000	610	980	0.13	960	PLUS247
IXTK60N50L2		60	0.100	24000	610	980	0.13	960	TO-264
IXTH30N60L2	600	30	0.240	10700	335	710	0.23	540	TO-247AD
IXTT30N60L2		30	0.240	10700	335	710	0.23	540	TO-268AA
IXTQ30N60L2		30	0.240	10700	335	710	0.23	540	TO-3P

MOSFET



X003
TO-251AA




X011b
TO-263AB



X015a
PLUS247




X019a
TO-268HV



X004
TO-252AA



X011c
TO-263ABHV



X017a
TO-3P



X020a
TO-264



X005a
TO-220AB



X014a
TO-247AD



X019
TO-268AA



X027a
SOT-227B (miniBLOC)

Depletion Mode Power MOSFET

"Normally on" devices

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	V _{GS(off)} max.	C _{iss} typ.	C _{rss} typ.	Q _g typ.	R _{thJC}	Package
	V	A	Ω	V	pF	pF	nC	K/W	
IXTH16N20D2	200	16.00	0.073	-4	5500	607	208	695	TO-247AD
IXTT16N20D2		16.00	0.073	-4	5500	607	208	695	TO-268AA
IOTP08N50D2	500	0.80	4.6	-4	312	11	12.7	60	TO-220AB
IXTY08N50D2		0.80	4.6	-4	312	11	12.7	60	TO-252AA
IXTA08N50D2		0.80	4.6	-4	312	11	12.7	60	TO-263AB
IOTP1R6N50D2		1.60	2.3	-4	645	16.5	23.7	100	TO-220AB
IXTY1R6N50D2		1.60	2.3	-4	645	16.5	23.7	100	TO-252AA
IXTA1R6N50D2		1.60	2.3	-4	645	16.5	23.7	100	TO-263AB
IOTP3N50D2		3.00	1.5	-4	1070	24	40	125	TO-220AB
IXTA3N50D2		3.00	1.5	-4	1070	24	40	125	TO-263AB
IOTP6N50D2		6.00	0.5	-4	2800	64	96	300	TO-220AB
IXTH6N50D2		6.00	0.5	-4	2800	64	96	300	TO-247AD
IXTA6N50D2		6.00	0.5	-4	2800	64	96	300	TO-263AB
IXTH16N50D2		16.00	0.24	-4	5250	130	199	695	TO-247AD
IXTT16N50D2		16.00	0.24	-4	5250	130	199	695	TO-268AA
IOTP08N100D2	1000	0.80	21	-4	325	6.5	14.6	60	TO-220AB
IXTY08N100D2		0.80	21	-4	325	6.5	14.6	60	TO-252AA
IXTA08N100D2		0.80	21	-4	325	6.5	14.6	60	TO-263AB
IXTA08N100D2HV		0.80	21	-4	325	6.5	14.6	60	TO-263ABHV
IOTP1R6N100D2		1.60	10	-4.5	645	11	27	100	TO-220AB
IXTY1R6N100D2		1.60	10	-4.5	645	11	27	100	TO-252AA
IXTA1R6N100D2		1.60	10	-4.5	645	11	27	100	TO-263AB
IOTP3N100D2		3.00	5.5	-4.5	1020	17	37.5	125	TO-220AB
IXTA3N100D2		3.00	5.5	-4.5	1020	17	37.5	125	TO-263AB
IXTA3N100D2HV		3.00	6	-4.5	1020	17	37.5	125	TO-263ABHV
IOTP6N100D2		6.00	2.2	-4.5	2650	41	95	300	TO-220AB
IXTH6N100D2		6.00	2.2	-4.5	2650	41	95	300	TO-247AD
IXTA6N100D2		6.00	2.2	-4.5	2650	41	95	300	TO-263AB
IXTT10N100D2	1700	10.00	1.5	-4.5	5320	70	200	695	TO-268AA
IXTH10N100D2		10.00	1.5	-4.5	5320	70	200	695	TO-247AD
IXTT2N170D2		2.00	6.5	-4	3650	80	110	568	TO-268AA
IXTH2N170D2		2.00	6.5	-4	3650	80	110	568	TO-247AD
IXTA1N170DHV		1.00	16	-4.5	3090	30	47	290	TO-263ABHV
IXTH1N170DHV		1.00	16	-4.5	3090	30	47	290	TO-247HV



N-Channel Depletion Mode FETs

Our N-channel depletion mode field effect transistors (FETs) utilize a proprietary third-generation vertical DMOS process. This economical silicon gate process realizes world-class, high-voltage MOSFET performance while also yielding a robust device for low-power applications with high input impedance. These highly reliable FET devices have been used extensively in our solid-state relays for industrial and telecommunications applications. These “normally on” MOSFETs are well suited for low-cost, pre-regulator applications that are tolerant of high voltage drops and power dissipation between the power source and the output regulator stage.


Part Number	$V_{(BR)DSX}$	$R_{DS(on)}$ max.	$V_{GS(off)}$ min.	$V_{GS(off)}$ max.	I_D min.	Package
	V	Ω	V	V	mA	
CPC3701	60	1	-1.4	-3.1	600	SOT-89
CPC3703	250	4	-1.6	-3.9	360	SOT-89
CPC3708	350	14	-2	-3.6	130	SOT-89 / SOT-223
CPC3710	250	10	-1.6	-3.9	220	SOT-89
CPC3714	350	14	-1.6	-3.9	240	SOT-89
CPC3720	350	22	-1.6	-3.9	130	SOT-89
CPC3730	350	35	-1.6	-3.9	140	SOT-89
CPC3902	250	2.5	-1.4	-3.1	400	SOT-89 / SOT-223
CPC3909	400	6	-1.4	-3.1	300	SOT-89 / SOT-223
CPC3960	600	44	-1.4	-3.1	100	SOT-223
CPC3980	800	45	-1.4	-3.1	100	SOT-223
CPC3981	800	45	-1.4	-3.1	100	SOT-223-2L
CPC3982	800	380	-1.4	-3.1	20	SOT-23

Switchable Current Regulators


Switchable current regulators are a new family of useful and versatile devices targeted for use in communications, networking, and power conversion circuits. Current regulators (or current sources) are traditionally made up of resistors and other discrete active components, and are extensively used in the design of high performance analog and mixed signal circuits and systems. With the introduction of simple to use switchable three terminal current regulators, board level system designers can now simplify their circuits by putting these new devices to work.

Part Number	V_{DSS}	$I_{D(cont)}$ Chip $T_C = 25^\circ C$	Configuration	R_{thJC}	P_D	Package
	V	A		K/W	W	
IXCP10M45S	450	-0.3	Single	3.1	40	TO-220
IXCY10M45S	450	-0.3	Single	3.1	40	TO-252
IXCP10M90S	900	-	Single	3.1	40	TO-220
IXCY10M90S	900	-	Single	3.1	40	TO-252


P-Channel TrenchP™ Power MOSFET




Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ. (max)	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTK120P20T	-200	-120	0.030	73000	740	-300	0.12	1040	TO-264
IXTX120P20T		-120	0.030	73000	740	-301	0.12	1040	PLUS247
IXTN120P20T		-106	0.030	73000	740	-302	0.15	830	SOT-227B (miniBLOC)
IXTR120P20T		-90	0.032	73000	740	-303	0.21	595	ISOPLUS247™
IXTH68P20T		-68	0.055	33400	380	245	0.22	568	TO-247AD
IXTT68P20T		-68	0.055	33400	380	245	0.22	568	TO-268AA
IXTA32P20T		-32	0.130	14500	185	190	0.42	300	TO-263AB
IXTP32P20T		-32	0.130	14500	185	190	0.42	300	TO-220AB
IXTH32P20T		-32	0.130	14500	185	190	0.42	300	TO-247AD
IXTQ32P20T		-32	0.130	14500	185	190	0.42	300	TO-3P
IXTP44P15T	-150	-44	0.065	13400	175	140	0.42	298	TO-220AB
IXTH44P15T		-44	0.065	13400	175	140	0.42	298	TO-247AD
IXTA44P15T		-44	0.065	13400	175	140	0.42	298	TO-263AB
IXTQ44P15T		-44	0.065	13400	175	140	0.42	298	TO-3P
IXTP15P15T		-15	0.240	3650	48	116	0.83	150	TO-220AB
IXTY15P15T		-15	0.240	3650	48	116	0.83	150	TO-252AA
IXTA15P15T		-15	0.240	3650	48	116	0.83	150	TO-263AB
IXTP10P15T		-10	0.350	2210	36	120	1.50	83	TO-220AB
IXTY10P15T		-10	0.350	2210	36	120	1.50	83	TO-252AA
IXTA10P15T		-10	0.350	2210	36	120	1.50	83	TO-263AB
IXTK210P10T	-100	-210	0.008	69500	740	-200	0.12	1040	TO-264
IXTN210P10T		-210	0.008	69500	740	-201	0.15	830	SOT-227B (miniBLOC)
IXTX210P10T		-210	0.008	69500	740	-202	0.12	1040	PLUS247
IXTR210P10T		-195	0.008	69500	740	-203	0.32	390	ISOPLUS247™
IXTH140P10T		-140	0.012	31400	400	130	0.22	568	TO-247AD
IXTT140P10T		-140	0.012	31400	400	130	0.22	568	TO-268AA
IXTR140P10T		-90	0.013	31400	400	130	0.46	270	ISOPLUS247™
IXTP76P10T		-76	0.025	13700	197	70	0.42	298	TO-220AB
IXTH76P10T		-76	0.025	13700	197	70	0.42	298	TO-247AD
IXTA76P10T		-76	0.025	13700	197	70	0.42	298	TO-263AB
IXTP26P10T		-26	0.090	3820	52	70	0.83	150	TO-220AB
IXTY26P10T		-26	0.090	3820	52	70	0.83	150	TO-252AA
IXTA26P10T		-26	0.090	3820	52	70	0.83	150	TO-263AB
IXTP18P10T		-18	0.120	2100	39	62	1.50	83	TO-220AB
IXTY18P10T		-18	0.120	2100	39	62	1.50	83	TO-252AA
IXTA18P10T		-18	0.120	2100	39	62	1.50	83	TO-263AB
IXTP96P085T	-85	-96	0.013	13100	180	55	0.42	298	TO-220AB
IXTH96P085T		-96	0.013	13100	180	55	0.42	298	TO-247AD
IXTA96P085T		-96	0.013	13100	180	55	0.42	298	TO-263AB
IXTP24P085T		-24	0.065	2090	41	40	1.50	83	TO-220AB
IXTA24P085T	-65	-24	0.065	2090	41	40	1.50	83	TO-263AB
IXTP120P065T		-120	0.010	13200	185	53	0.42	298	TO-220AB
IXTH120P065T		-120	0.010	13200	185	53	0.42	298	TO-247AD
IXTA120P065T		-120	0.010	13200	185	53	0.42	298	TO-263AB
IXTP28P065T		-28	0.045	2030	46	31	1.50	83	TO-220AB
IXTA28P065T	-50	-28	0.045	2030	46	31	1.50	83	TO-263AB
IXTP140P05T		-140	0.009	13500	200	53	0.42	298	TO-220AB
IXTH140P05T		-140	0.009	13500	200	53	0.42	298	TO-247AD
IXTA140P05T		-140	0.009	13500	200	53	0.42	298	TO-263AB
IXTP48P05T		-48	0.030	3660	53	30	0.83	150	TO-220AB
IXTY48P05T		-48	0.030	3660	53	30	0.83	150	TO-252AA
IXTA48P05T		-48	0.030	3660	53	30	0.83	150	TO-263AB
IXTP32P05T		-32	0.039	1975	46	26	1.50	83	TO-220AB
IXTY32P05T	-50	-32	0.039	1975	46	26	1.50	83	TO-252AA
IXTA32P05T		-32	0.039	1975	46	26	1.50	83	TO-263AB



X005a
TO-220AB



X015a
PLUS247




X019
TO-268AA



X027a
SOT-227B (miniBLOC)




X011b
TO-263AB




X016a
ISOPLUS247™




X020a
TO-264




X014a
TO-247AD



X017a
TO-3P



X021a
PLUS264



P-Channel PolarP™ Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTX32P60P	-600	-32	0.350	11100	196	480	0.14	890	PLUS247
IXTN32P60P		-32	0.350	11100	196	480	0.14	890	SOT-227B miniBLOC
IXTK32P60P		-32	0.350	11100	196	480	0.14	890	TO-264
IXTR32P60P		-18	0.385	11100	196	480	0.40	310	ISOPLUS247™
IXTH16P60P		-16	0.720	5120	92	440	0.27	460	TO-247AD
IXTT16P60P		-16	0.720	5120	92	440	0.27	460	TO-268AA
IXTR16P60P		-10	0.790	5120	92	440	0.66	190	ISOPLUS247™
IXTX40P50P	-500	-40	0.230	11.5	205	477	0.14	890	PLUS247
IXTN40P50P		-40	0.230	11500	205	477	0.14	890	SOT-227B miniBLOC
IXTK40P50P		-40	0.230	11500	205	477	0.14	890	TO-264
IXTR40P50P		-22	0.260	11500	205	477	0.40	312	ISOPLUS247™
IXTH20P50P		-20	0.450	5120	103	406	0.27	460	TO-247AD
IXTT20P50P		-20	0.450	5120	103	406	0.27	460	TO-268AA
IXTR20P50P		-13	0.490	5120	103	406	0.66	190	ISOPLUS247™
IXTP10P50P		-10	1.000	2670	50	414	0.50	300	TO-220AB
IXTH10P50P		-10	1.000	2670	50	414	0.50	300	TO-247AD
IXTA10P50P		-10	1.000	2670	50	414	0.50	300	TO-263AB
IXTQ10P50P		-10	1.000	2670	50	414	0.50	300	TO-3P
IXTX90P20P		-90	0.044	12000	205	315	0.14	890	PLUS247
IXTN90P20P		-90	0.044	12000	205	315	0.14	890	SOT-227B miniBLOC
IXTK90P20P		-90	0.044	12000	205	315	0.14	890	TO-264
IXTR90P20P	-200	-53	0.048	12000	205	315	0.40	312	ISOPLUS247™
IXTH48P20P		-48	0.085	5400	103	260	0.27	462	TO-247AD
IXTT48P20P		-48	0.085	5400	103	260	0.27	462	TO-268AA
IXTR48P20P		-30	0.093	5400	103	260	0.66	190	ISOPLUS247™
IXTP26P20P		-26	0.170	2740	56	240	0.42	300	TO-220AB
IXTH26P20P		-26	0.170	2740	56	240	0.42	300	TO-247AD
IXTA26P20P		-26	0.170	2740	56	240	0.42	300	TO-263AB
IXTQ26P20P		-26	0.170	2740	56	240	0.42	300	TO-3P
IXTP36P15P		-36	0.110	3100	55	228	0.42	300	TO-220AB
IXTH36P15P		-36	0.110	3100	55	228	0.42	300	TO-247AD
IXTA36P15P	-150	-36	0.110	3100	55	228	0.42	300	TO-263AB
IXTQ36P15P		-36	0.110	3100	55	228	0.42	300	TO-3P
IXTR36P15P		-22	0.120	2950	55	150	1.00	150	ISOPLUS247™
IXTX170P10P		-170	0.012	12600	240	176	0.14	890	PLUS247
IXTN170P10P	-100	-170	0.012	12600	240	176	0.14	890	SOT-227B miniBLOC
IXTK170P10P		-170	0.012	12600	240	176	0.14	890	TO-264
IXTR170P10P		-108	0.013	12600	240	176	0.40	312	ISOPLUS247™
IXTH90P10P		-90	0.025	5800	120	144	0.27	462	TO-247AD
IXTT90P10P		-90	0.025	5800	120	144	0.27	462	TO-268AA
IXTP52P10P		-52	0.050	2845	60	120	0.42	300	TO-220AB
IXTH52P10P		-52	0.050	2845	60	120	0.42	300	TO-247AD
IXTA52P10P		-52	0.050	2845	60	120	0.42	300	TO-263AB
IXTQ52P10P		-52	0.05	2845	60	120	0.42	300	TO-3P

Automotive Grade Power MOSFET (AEC-Q101 + PPAP)

P-Channel PolarP™ Power MOSFET

Part Number	V _{DSS}	I _{D(cont)} Chip T _C = 25 °C	R _{DS(on)} T _J = 25 °C	C _{iss} typ.	Q _g typ.	t _{rr} typ.	R _{thJC}	P _D	Package
	V	A	Ω	pF	nC	ns	K/W	W	
IXTY2P50PA	-500	-2	4.2	600	11.9	300	2.15	58	TO-252

IGBT

IX	Y	T	30	N	65	C3	*	H1	HV	Example
IX										IXYS – LF Technology

		Technology Series
B		BiMOSFET™
G		NPT, PT IGBT
H		MOS-gated thyristor
V		NPT Trench IGBT
X		Short-circuit rated XPT™
Y		XPT™

		Package Type
A		TO-263
B		PLUS264™
C		ISOPLUS220™
E		ISOPLUS227™
F		ISOPLUS i4-PAC™
H		TO-247
I		TO-262
J		ISO247
K		TO-264
L		ISOPLUS i5-PAC™ (ISOPLUS264™)
M		TO-3
N		SOT227B
P		TO-220
Q		TO-3P
R		ISOPLUS247™
T		TO-268
V		PLUS220™
X		PLUS247™
Y		TO-252
Z		DE

		Current Rating (Examples) at High Temperature *
30		30 = 30 A
200		200 = 200 A
400		400 = 400 A

		Silicon Type
N		N = N-channel type

		Voltage Class (Examples)
65		65 = 650 V
120		120 = 1200 V
250		250 = 2500 V

		Switching Class
A		Low frequency (≤5 kHz) switching
B		Medium frequency (5 kHz - 20 kHz)
C		High frequency (≥20 kHz) switching
	3	Gen.3 Die technology
	4	Gen.4 Die technology
	5	Gen.5 Die technology
	6	Gen.6 Die technology

		Optional*
A		Automotive qualified

		Copack Diode Type
C1		SiC diode
D1		FRED™ diode
H1		SONIC-FRD™ diode
V1		Other Si diode

		Suffix
M		Overmolded package
HV		High-voltage package

I	X	A	20	IF	1200	PZ	Example
I							IGBT

		Technology Series
X		XPT™
Y		XPT Trench
T		Trench IGBT

		Chip Generation
A		XPT
E		Gen.5 Medium frequency (5 kHz – 20 kHz) switching
F		Gen.4 High frequency (≥20 kHz) switching

		Current Rating (Examples) at High Temperature *
20		20 A
200		200 A
400		400 A

		Configuration
I		Single
R		Reverse blocking
IF		Co-Pack diode
RG		Boost configuration
PG		Half-bridge with free wheeling and desat diode
PF		Half-bridge with free wheeling diode configuration

		Voltage Class (Examples)
600		600 = 600 V
1200		1200 = 1200 V
2500		2500 = 2500 V

		Package Type
HB		TO-247AD (3)
HF		PLUS247™ (3)
HJ		ISOPLUS247™ (3)
HR		ISO247™ (3)
LB		SMPD-B
NA		SOT-227B (minibloc)
PB		TO-220AB (3)
PJ		ISOPLUS220™AB (3)
PZ		TO-263AB (D2PAC) (2HV)
TC		TO-268AA (D3PAC) (2)
UC		TO-252AA (DPAC)

* Old technologies are rated at room temperature

IGBT Technology

The Insulated Gate Bipolar Transistor (IGBT) is a key component used in major industrial and automotive applications today. Littelfuse offers one of the largest portfolios of IGBTs in terms of package, current, and voltage. Littelfuse offers IGBTs optimized for conduction and switching performance across a wide range of applications. These IGBTs come in A, B, and C switching classes. The portfolio includes both single IGBTs and co-pack IGBTs with an integrated anti-parallel diode inside the package. Class A devices target low frequency applications and feature lower conduction losses, while Class B and C IGBTs are optimized for medium and high-switching frequency applications.

Littelfuse IGBTs feature low thermal resistance $R_{th(j-c)}$ to simplify thermal design and improve overall system efficiency, along with industry-leading low gate charge (Q_g) that reduces gate driver requirements. The following table summarizes the IGBT portfolio.

IGBT Technologies and their Distinctive Characteristics

600–1200 V

IGBT Characteristics	XPT™ Gen3 Planar			XPT™ Gen3 Planar			XPT™ Gen4 Trench			XPT™ Gen5Trench		
Sub-family	IXA*	IXX*		IXY*			IXX* (650 V), IXY* (1200 V)			IXY*		
Switching class	–	B3	C3	A3	B3	C3	A4	B4	C4	A5	B5	C5
Speed	Medium	Medium	High	Low	Medium	High	Low	Medium	High	Low	Medium	High
Surge Curnnet Capability	Medium	Medium		Medium			Medium (650 V), High (1200 V)			High		
Square RBSOA	Yes	Yes		Yes			Yes (650 V), No (1200 V)			Yes		
Short Circuit Rated	Yes	Yes	Yes	Yes (650 V)		Yes (650 V), No (1200 V)				No		
				No (900 V, 1200 V)								
Voltage Class	1200 V	600 V		650 V, 900 V, 1200 V			650 V, 1200 V			650 V		

IGBT Technologies and their Distinctive Characteristics

1600–4500 V

IGBT Characteristics	XPT™ Gen3 Planar		XPT™ Gen3 Planar	
Sub-family	IXY*		IXB*	
Switching class	–		–	
Speed	Medium		Medium	
Surge Current Capability	Medium		Medium	
Square RBSOA	No		No	
Short Circuit Rated	No		No	
Voltage Class	1700–4500 V		1600–3600 V	

IGBT Product Families

Xtreme Light Punch Through (XPT™) Planar IGBTs

This extremely rugged IGBT technology platform is designed for critical applications that require low conduction and low switching losses with a 10 μ s short circuit withstand capability. Both are available as single or co-packaged with ultrafast soft recovery Sonic diodes. Littelfuse XPT™ IGBTs have lower saturation voltage $V_{CE(sat)}$ and low total switching energy ($E_{on} + E_{off}$). A large portion of the of module-packed Planar XPT™s is available for applications such as UPS, motor drive, and solar inverters.

Xtreme Light Punch Through (X2PT™) Planar IGBTs

This is the second generation of XPT™ IGBTs. Its features are 10 μ s short circuit capability, 175 °C max junction temperature, further reduced $V_{CE(sat)}$, and lower turn-off losses (E_{off}), resulting in competitive performance that is comparable to the latest trench devices at reduced R_{th} . These devices are well for motor drive inverters.

Xtreme Light Punch Through (XPT™) Trench IGBTs

This is the latest development from Littelfuse, starting at 650 V. These devices features both low $V_{CE(sat)}$, and extremely low switching losses, enabling fast-switching applications while maintaining strong SOA performance and a positive temperature coefficient. Both configuration options—single IGBT or co-packaged with an ultrafast soft recovery sonic diode—are available. Littelfuse XPT™ IGBTs have industry leading efficiency at medium to high switching frequency.


Very High Voltage (2500 V–4000 V) IGBTs


Littelfuse offers a portfolio of discrete 2500 V, 3000 V, and 4000 V VHV IGBTs with collector current ratings spanning from 2 A to 75 A ($T_c = 110$ °C). The voltage and current ratings of these devices, combined with simplified MOS gate-control, allow system designers to reduce the complexity of high-voltage switching designs. These IGBTs allow replacement of multiple, cascaded, lower-voltage switches with a single device.

BiMOSFET™ IGBTs


Littelfuse BiMOSFET™s are devices that combine the strengths of MOSFETs and IGBTs. BiMOSFET™s feature a monolithic intrinsic diode that reduces the die count in many applications.

Discrete IGBT Technology Families

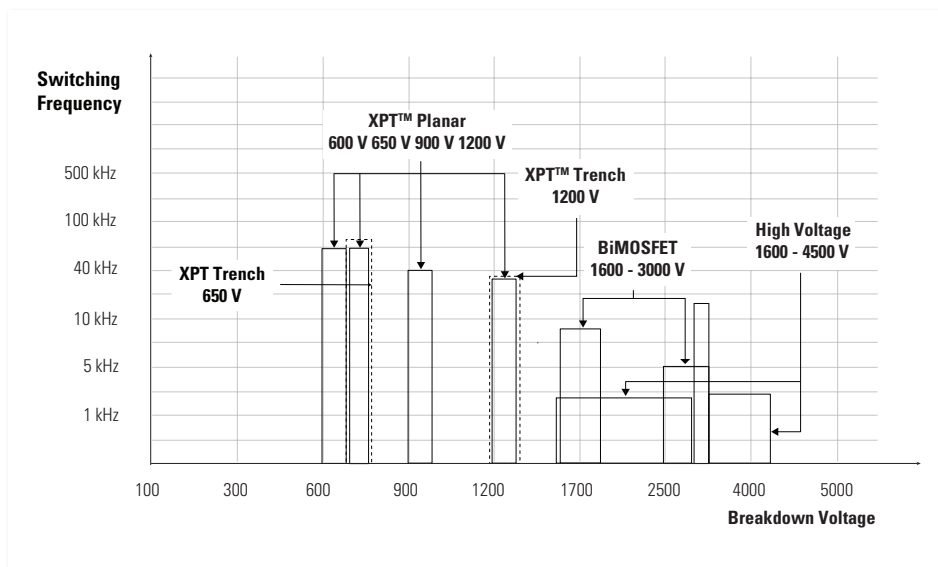





X005a
TO-220AB



X016a
ISOPLUS247™




X019a
TO-268HV




**IXX...
IXY...**




X011b
TO-263AB




X017a
TO-3P



X020a
TO-264




X014a
TO-247AD




X017c
TO-3PFP



X027a
SOT-227B (miniBLOC)



**IXX...D1/H1
IXY...D1/H1**



X015a
PLUS247

600V XPT™ Planar IGBTs

XPT™ = Xtreme Light Punch Through, short-circuit rated IGBTs

Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110 °C	V _{CE(sat)} T _C = 25 °C	t _{fi} typ. T _J = 150 °C	E _{off} typ. T _J = 150 °C	R _{thJC}	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
B3 Class (5–30 kHz Switching)												
IXXQ30N60B3M	600	33	19	1.85	180	0.7	1.66	–	–	–	90	TO-3PFP
IXXH30N60B3		60	30	1.85	180	0.7	0.55	–	–	–	270	TO-247AD
IXXH30N60B3D1		60	30	1.85	180	0.7	0.55	•	30	0.9	270	TO-247AD
IXXA50N60B3		120	50	1.8	190	1.2	0.25	–	–	–	600	TO-263AB
IXXH50N60B3		120	50	1.8	190	1.2	0.25	–	–	–	600	TO-247AD
IXXH50N60B3D1		120	50	1.8	190	1.2	0.25	•	30	0.9	600	TO-247AD
IXXP50N60B3		120	50	1.8	190	1.2	0.25	–	–	–	600	TO-220AB
IXXR100N60B3H1		145	68	1.8	200	2.8	0.31	•	–	0.62	400	ISOPLUS247™
IXXH75N60B3		160	75	1.85	170	2.2	0.2	–	–	–	750	TO-247AD
IXXH75N60B3D1		160	75	1.85	170	2.2	0.200	•	30	0.9	750	TO-247AD
IXXN100N60B3H1		170	100 (90 °C)	1.8	200	2.8	0.25	•	50	0.42	500	SOT-227B (miniBLOC)
IXXK100N60B3H1		200	100 (100 °C)	1.8	200	2.8	0.18	•	65	0.3	695	TO-64
IXXN200N60B3H1		200	98	1.7	215	3.45	0.16	•	30	0.7	780	SOT-227B (miniBLOC)
IXXX100N60B3H1		200	100 (100 °C)	1.8	200	2.8	0.18	•	65	0.3	695	PLUS247
IXXH100N60B3		220	100	1.8	200	2.8	0.18	–	–	–	830	TO-247AD
IXXN200N60B3		280	160	1.7	215	3.45	0.16	–	–	–	940	SOT-227B (miniBLOC)
IXXK200N60B3		380	200	1.7	215	3.45	0.092	–	–	–	1630	TO-64
IXXX200N60B3		380	200	1.7	215	3.45	0.092	–	–	–	1630	PLUS247
IXXK300N60B3	550	300	1.6	200	3.7	0.065	–	–	–	2300	TO-64	
IXXX300N60B3	550	300	1.6	200	3.7	0.065	–	–	–	2300	PLUS247	
C3 Class (20–60 kHz Switching)												
IXXH30N60C3	600	60	30	2.2	32	0.4	0.55	–	–	–	270	TO-247AD
IXXH30N60C3D1		60	30	2.2	78	0.4	0.55	•	30	0.9	270	TO-247AD
IXXH50N60C3		100	50	2.3	90	0.48	0.25	–	–	–	600	TO-247AD
IXXH50N60C3D1		100	50	2.3	90	0.48	0.25	•	30	0.9	600	TO-247AD
IXXH75N60C3		150	75	2.3	80	1.07	0.2	–	–	–	750	TO-247AD
IXXH75N60C3D1		150	75	2.3	80	1.07	0.2	•	30	0.9	750	TO-247AD
IXXK100N60C3H1		170	100 (90 °C)	2.2	115	1.4	0.18	•	65	0.3	695	TO-64
IXXX100N60C3H1		170	100 (90 °C)	2.2	115	1.4	0.18	•	65	0.3	695	PLUS247
IXXH100N60C3		190	100	2.2	115	1.4	0.18	–	–	–	830	TO-247AD
IXXN200N60C3H1		200	98	2.1	90	2.1	0.16	•	30	0.7	780	SOT-227B (miniBLOC)
IXXK200N60C3		340	200	2.1	90	2.1	0.092	–	–	–	1630	TO-64
IXXX200N60C3		340	200	2.1	90	2.1	0.092	–	–	–	1630	PLUS247
IXXK300N60C3		510	300	2	90	2.35	0.065	–	–	–	2300	TO-64
IXXX300N60C3		510	300	2	90	2.35	0.065	–	–	–	2300	PLUS247


650V XPT™ Planar IGBTs

XPT™ = Xtreme Light Punch Through, short-circuit rated IGBTs


Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110 °C	V _{CE(sat)} T _C = 25 °C	t _{fi} typ. T _J = 150 °C	E _{off} typ. T _J = 150 °C	R _{thJC}	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
A3 Class (up to 5 kHz Switching)												
IXYN100N65A3	650	170	100	1.8	160	2.4	0.25	–	–	–	600	SOT-227B (miniBLOC)
IXYH100N65A3		240	100	1.8	225	3.7	0.18	–	–	–	470	TO-247AD
IXYN300N65A3		470	300	1.6	175	7.3	0.1	–	–	–	1500	SOT-227B (miniBLOC)
IXYK300N65A3		600	300	1.6	175	7.3	0.065	–	–	–	2300	TO-264
IXYX300N65A3		600	300	1.6	175	7.3	0.065	–	–	–	2300	PLUS247
B3 Class (10–30 kHz Switching)												
IXYA20N65B3	650	58	20	2.1	147	0.76	0.65	–	–	–	230	TO-263AB
IXYH20N65B3		58	20	2.1	147	0.76	0.65	–	–	–	230	TO-247AD
IXYP20N65B3		58	20	2.1	147	0.76	0.65	–	–	–	230	TO-220AB
IXYH40N65B3		86	40	2	174	1.15	0.5	–	–	–	300	TO-247AD
IXYH40N65B3D1		86	40	2	174	1.15	0.5	•	50	0.6	300	TO-247AD
IXYH100N65B3		225	100	1.85	160	2.16	0.18	–	–	–	830	TO-247AD
IXYH120N65B3		340	120	1.9	196	2.2	0.11	–	–	–	–	TO-247AD
IXYK200N65B3		410	200	1.7	230	5.6	0.096	–	–	–	–	TO-264
IXYX200N65B3		410	200	1.7	230	5.6	0.096	–	–	–	–	PLUS247
C3 Class (20–60 kHz Switching)												
IXYP10N65C3	650	30	10	2.5	38	0.15	0.94	–	–	–	160	TO-220AB
IXYP15N65C3		38	15	2.5	42	0.24	0.75	–	–	–	200	TO-220AB
IXYA20N65C3		50	20	2.5	36	0.4	0.65	–	–	–	230	TO-263AB
IXYP10N65C3		30	10	2.5	38	0.15	0.94	–	–	–	160	TO-220AB
IXYA15N65C3D1		38	15	2.5	42	0.24	0.75	•	23	1.85	200	TO-263AB
IXYP15N65C3		38	15	2.5	42	0.24	0.75	–	–	–	200	TO-220AB
IXYP15N65C3D1		38	15	2.5	42	0.24	0.75	•	23	1.85	200	TO-220AB
IXYA20N65C3		50	20	2.5	36	0.4	0.65	–	–	–	230	TO-263AB
IXYA20N65C3D1		50	20	2.5	36	0.4	0.65	•	18	1.85	200	TO-263AB
IXYH20N65C3		50	20	2.5	36	0.4	0.65	–	–	–	230	TO-247AD
IXYP20N65C3D1		50	20	2.5	36	0.4	0.65	•	18	1.85	200	TO-220AB
IXYH30N65C3H1		60	30	2.7	30	0.41	0.55	•	29	0.8	270	TO-247AD
IXYH30N65C3		60	30	2.7	30	0.41	0.55	–	–	–	270	TO-247AD
IXYT30N65C3H1HV		60	30	2.7	30	0.41	0.55	•	29	0.8	270	TO-268HV
IXYP30N65C3		60	30	2.7	30	0.41	0.55	–	–	–	270	TO-220AB
IXYQ40N65C3D1		80	40	2.35	30	0.53	0.5	•	50	0.6	300	TO-3P
IXYH40N65C3		80	40	2.35	30	0.53	0.5	–	–	–	300	TO-247AD
IXYH40N65C3H1		80	40	2.35	80	0.46	0.5	•	40	0.6	300	TO-247AD
IXYH50N65C3H1		130	50	2.1	42	0.56	0.25	•	40	0.6	600	TO-247AD
IXYP50N65C3		132	50	2.1	32	0.7	0.25	–	–	–	600	TO-220AB
IXYH50N65C3		132	50	2.1	32	0.7	0.25	–	–	–	600	TO-247AD
IXYA50N65C3		132	50	2.1	32	0.7	0.25	–	–	–	600	TO-263AB
IXYN100N65C3H1		160	90	2.3	66	1.15	0.25	•	50	0.42	600	SOT-227B (miniBLOC)
IXYH75N65C3H1		170	75	2.3	58	1.3	0.2	•	62	0.45	750	TO-247AD
IXYH75N65C3		175	75	2.3	64	1.3	0.2	–	–	–	750	TO-247AD
IXYX100N65C3D1		200	100	2.3	66	1.15	0.18	•	67	0.36	830	PLUS247
IXYH100N65C3		200	100	2.3	66	1.15	0.18	–	–	–	830	TO-247AD
IXYK100N65C3D1		200	100	2.3	66	1.15	0.18	•	67	0.36	830	TO-264
IXYH120N65C3		260	120	2.8	60	0.7	0.11	–	–	–	–	TO-247AD




X005a
TO-220AB




X014a
TO-247AD




X019a
TO-268HV



IXX...
IXV...




X007a
TO-220ABFP



X015a
PLUS247



X020a
TO-264




X014a
TO-247AD




X016a
ISOPLUS247™



X027a
SOT-227B (miniBLOC)



IXX...D1/H1
IXV...D1/H1



X011c
TO-263ABHV

650 V XPT™ Trench IGBTs

XPT™ = Xtreme Light Punch Through, short-circuit rated IGBTs

Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110 °C	V _{CE(sat)} T _C = 25 °C	t _{fi} typ. T _J = 150 °C	E _{off} typ. T _J = 150 °C	R _{thJC}	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
A4 Class (up to 5 kHz Switching)												
IXXN200N65A4	650	440	200	1.8	190	8	0.12	–	–	–	1250	SOT-227B (miniBLOC)
A5 Class (up to 5 kHz Switching)												
IXYP60N65A5	650	134	60	1.35	240	2.5	0.38	–	–	–	395	TO-220AB
IXYH90N65A5		220	90	1.35	360	5	0.23	–	–	–	650	TO-247AD
IXYH120N65A5		290	120	1.35	290	4.7	0.18	–	–	–	830	TO-247AD
B4 Class (5–30 kHz Switching)												
IXXP12N65B4	650	38	12	1.95	110	0.38	0.94	–	–	–	160	TO-220AB
IXXP12N65B4D1		38	12	1.95	110	0.38	0.94	•	11	2.3	160	TO-220AB
IXXH30N65B4		70	30	2	60	1.07	0.65	–	–	–	230	TO-247AD
IXXH40N65B4		115	40	2	116	1.3	0.33	–	–	–	455	TO-247AD
IXXH60N65B4		120	60	2.2	88	1.8	0.33	–	–	–	536	TO-247AD
IXXH60N65B4H1		120	60	2.2	88	1.8	0.33	•	47	0.6	536	TO-247AD
IXXH40N65B4H1		123	40	2	73	1.4	0.33	•	40	0.6	455	TO-247AD
IXXR110N65B4H1		150	70	2.2	105	1.4	0.33	•	48	0.7	455	ISOPLUS247™
IXXH80N65B4		160	80	2.1	94	2.7	0.24	–	–	–	625	TO-247AD
IXXH80N65B4H1		160	80	2.1	102	3.1	0.24	•	62	0.45	625	TO-247AD
IXXN110N65B4H1		230	110	2.1	110	2.16	0.2	•	70	0.42	750	SOT-227B (miniBLOC)
IXXH110N65B4		250	110	2.1	110	2.16	0.17	–	–	–	880	TO-247AD
IXXK110N65B4H1		250	110	2.1	110	2.16	0.17	•	78	0.38	880	TO-264
IXXX110N65B4H1		250	110	2.1	110	2.16	0.17	•	78	0.38	880	PLUS247
IXXK160N65B4		310	160	1.8	160	2.36	0.16	–	–	–	940	TO-264
IXXX160N65B4		310	160	1.8	160	2.36	0.16	–	–	–	940	PLUS247
IXXH140N65B4		340	140	1.9	100	3.9	0.125	–	–	–	1200	TO-247AD
IXXX140N65B4H1		350	140	1.9	100	3.9	0.125	•	72	0.24	1200	PLUS247
IXXK200N65B4		480	200	1.7	120	5	0.092	–	–	–	1630	TO-264
IXXX200N65B4		480	200	1.7	120	2.54	0.092	–	–	–	1630	PLUS247
IXXN340N65B4		520	340 (90 °C)	1.7	110	2.54	0.1	–	–	–	1500	SOT-227B (miniBLOC)
C4 Class (20–60 kHz Switching)												
IXXH60N65C4	650	125	60	2.4	54	1.5	0.33	–	–	–	536	TO-247AD
IXXN110N65C4H1		210	110	2.35	40	0.9	0.2	•	70	0.42	750	SOT-227B (miniBLOC)
IXXH110N65C4		235	110	2.35	40	0.9	0.17	–	–	–	880	TO-247AD
IXXK160N65C4		290	160	2.1	57	1.3	0.16	–	–	–	940	TO-264
IXXX160N65C4		290	160	2.1	57	1.3	0.16	–	–	–	940	PLUS247
IXXH140N65C4		320	160	2.3	63	2.5	0.125	–	–	–	1200	TO-247AD

1200 V XPT™ Trench IGBTs

XPT™ = Xtreme Light Punch Through, short-circuit rated IGBTs

Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110° C	V _{CE(sat)} T _C = 25 °C	t _{fi} typ. T _J = 125 °C	E _{off} typ. T _J = 120 °C	R _{thJC}	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
A4 Class (up to 5 kHz Switching)												
IXYA20N120A4HV	1200	80	20	1.9	286	4.85	0.4	–	–	–	375	TO-263ABHV
IXYP20N120A4		80	20	1.9	286	4.85	0.4	–	–	–	375	TO-220AB
IXYA30N120A4HV		106	30	1.9	270	5.6	0.3	–	–	–	500	TO-263ABHV
IXYH30N120A4		106	30	1.9	270	5.6	0.3	–	–	–	500	TO-247AD
IXYP30N120A4		106	30	1.9	270	5.6	0.3	–	–	–	500	TO-220AB
IXYH40N120A4		150	40	1.8	365	8.3	0.22	–	–	–	680	TO-247AD
IXYT40N120A4HV		150	40	1.8	365	8.3	0.22	–	–	–	680	TO-268HV
IXYT55N120A4HV		175	55	1.8	270	8.8	0.23	–	–	–	650	TO-268HV
IXYH55N120A4		175	55	1.8	270	8.8	0.23	–	–	–	650	TO-247AD
IXYT85N120A4HV		300	85	1.8	280	13.7	0.13	–	–	–	1150	TO-268HV
IXYH85N120A4		300	85	1.8	280	13.7	0.13	–	–	–	1150	TO-247AD
IXYK110N120A4		375	140	1.8	320	20	0.1	–	–	–	1360	TO-264
IXYN110N120A4		375	140	1.8	320	20	0.14	–	–	–	830	SOT0227B (miniBLOC)
IXYX110N120A4		375	140	1.8	320	20	0.1	–	–	–	1360	PLUS247
IXYK140N120A4		480	140	1.7	320	20	0.1	–	–	–	1500	TO-264
IXYN140N120A4		480	140	1.7	320	20	0.14	–	–	–	1070	SOT0227B (miniBLOC)
IXYX140N120A4	480	140	1.7	320	20	0.1	–	–	–	1500	PLUS247	
B4 Class (5–30 kHz Switching)												
IXYA20N120B4HV	1200	76	20	2.1	170	2.7	0.4	–	–	–	375	TO-263ABHV
IXYP20N120B4		76	20	2.1	170	2.7	0.4	–	–	–	375	TO-220AB
IXYH30N120B4		100	30	2.1	190	4	0.3	–	–	–	500	TO-247AD
IXYH40N120B4		136	40	2.1	190	4.4	0.22	–	–	–	680	TO-247AD
IXYK110N120B4		340	110	2.1	210	6.45	0.11	–	–	–	1360	TO-264
IXYX110N120B4		340	110	2.1	210	6.45	0.11	–	–	–	1360	PLUS247
IXYH40N120B4H1		112	40	2.1	190	4.4	0.25	•	32	0.35	600	TO-247AD
IXYH55N120B4H1		138	55	2.1	340	4.5	0.23	•	32	0.35	650	TO-247AD
IXYN110N120B4H1		218	110	2.1	210	6.45	0.18	•	74	0.41	830	SOT227B (miniBLOC)
C4 Class (20–50 kHz Switching)												
IXYA20N120C4HV	1200	68	20	2.5	86	1.6	0.4	–	–	–	375	TO-263ABHV
IXYP20N120C4		68	20	2.5	86	1.6	0.4	–	–	–	375	TO-220AB
IXYH30N120C4		94	30	2.4	100	2.7	0.3	–	–	–	500	TO-247AD
IXYH40N120C4		120	40	2.5	80	2.65	0.22	–	–	–	680	TO-247AD
IXYH55N120C4		140	55	2.5	123	2.5	0.23	–	–	–	650	TO-247AD
IXYH85N120C4		160	85	2.5	112	3.3	0.13	–	–	–	1150	TO-247AD
IXYK110N120C4		310	110	2.4	90	3.2	0.11	–	–	–	1360	TO-264
IXYN110N120C4		220	110	2.4	90	3.2	0.17	–	–	–	830	SOT0227B (miniBLOC)
IXYX110N120C4		310	110	2.4	110	3.2	0.11	–	–	–	1360	PLUS247
IXYH40N120C4H1		110	40	2.5	80	2.65	0.22	•	32	0.35	680	TO-247AD
IXYH55N120C4H1		126	55	2.5	123	2.5	0.35	•	37	0.35	650	TO-247AD
IXYN85N120C4H1		150	85	2.5	110	3.3	0.25	•	74	0.41	600	SOT227B (miniBLOC)
IXYK85N120C4H1		220	85	2.5	110	3.3	0.13	•	140	0.16	1150	TO-264
IXYN110N120C4H1		210	110	2.4	90	3.2	0.18	•	74	0.41	830	SOT227B (miniBLOC)

IGBT



XPT™ Planar IGBT

XPT™ = Xtreme Light Punch Through


Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110 °C	V _{CE(sat)} T _C = 25 °C	t _{fi} typ. T _J = 150 °C	E _{off} typ. T _J = 150 °C	R _{thJC}	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
1700V XPT™ Planar IGBTs												
IXYH10N170C	1700	36	10	4.1	94	0.9	0.53	–	–	–	280	TO-247AD
IXYH10N170CV1		36	10	4.1	94	0.9	0.53	•	22	0.7	280	TO-247AD
IXYF30N170CV1		36	20	4	134	3.5	0.65	•	20	0.86	230	ISOPLUS i4-PAC™
IXYH16N170C		40	16	3.8	140	1.95	0.48	–	–	–	310	TO-247AD
IXYH16N170CV1		40	16	3.8	140	1.95	0.48	•	22	0.7	310	TO-247AD
IXYH24N170C		58	24	4	140	2.66	0.3	–	–	–	500	TO-247AD
IXYH24N170CV1		58	24	4	140	2.66	0.3	•	28	0.55	500	TO-247AD
IXYN30N170CV1		80	30	4	134	3.5	0.22	•	33	0.43	680	SOT-227B (miniBLOC)
IXYL50N170CV1		90	46	3.7	160	8.2	0.26	•	26	0.83	580	ISOPLUS264™
IXYH30N170C		100	30	4	134	3.5	0.16	–	–	–	937	TO-247AD
IXYK30N170CV1		100	30	4	134	3.5	0.16	•	38	0.36	937	To-264
IXYX30N170CV1		100	30	4	134	3.5	0.16	•	38	0.36	937	PLUS247
IXYN50N170CV1		120	50	3.7	160	8.2	0.17	•	42	0.42	880	SOT-227B (miniBLOC)
IXYX50N170C	178	50	3.7	160	8.2	0.1	–	–	–	1500	PLUS247	
2500V XPT™ Planar IGBTs												
IXYF16N250CV1	2500	26	14	4	236	4.4	0.83	•	9	1.5	180	ISOPLUS i4-PAC™
IXYA12N250CHV		28	12	4.5	138	1.95	0.48	–	–	–	310	TO-263ABHV
IXYH12N250CHV		28	12	4.5	138	1.95	0.48	–	–	–	310	TO-247HV
IXYH12N250CV1HV		28	12	4.5	138	1.95	0.48	•	14	0.8	310	TO-247HV
IXYT12N250CV1HV		28	12	4.5	138	1.95	0.48	•	14	0.8	310	TO-268HV
IXYA8N250CHV		29	8	4	128	1.2	0.53	–	–	–	280	TO-263ABHV
IXYH8N250CHV		29	8	4	128	1.2	0.53	–	–	–	280	TO-247HV
IXYH8N250CV1HV		29	8	4	128	1.2	0.53	•	14	0.8	280	TO-247HV
IXYH16N250CV1HV		38	16	4	236	4.4	0.3	•	14	0.8	500	TO-247HV
IXYL40N250CV1		80	40	4	250	11.5	0.26	•	23	0.83	577	ISOPLUS264™
IXYH25N250CHV		95	25	4	350	10.5	0.16	–	–	–	937	TO-247HV
IXYT25N250CHV		95	25	4	350	10.5	0.16	–	–	–	937	TO-268HV
IXYX25N250CV1		95	25	4	350	10.5	0.16	•	30	0.32	937	PLUS247
IXYX25N250CV1HV		95	25	4	350	10.5	0.16	•	30	0.32	937	PLUS247 HV
IXYX40N250CHV		154	40	4	250	11.5	0.1	–	–	–	1500	PLUS247 HV

900/1200 V XPT™ Planar IGBTs


Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110 °C (90 °C)	V _{CE(sat)} T _C = 25 °C	t _{fi} typ. T _J = 125 °C (150 °C)	E _{off} typ. T _J = 125 °C (150 °C)	R _{thJC}	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
C3 Class (20–50 kHz Switching)												
IXYA8N90C3D1	900	20	8	2.5	163	0.22	1.2	•	12	2.5	125	TO-263AB
IXYP8N90C3		20	8	2.5	163	0.22	1.2	–	–	–	125	TO-220AB
IXYP8N90C3D1		20	8	2.5	163	0.22	1.2	•	12	2.5	125	TO-220AB
IXYY8N90C3		20	8	2.5	163	0.22	1.2	–	–	–	125	TO-252AA
IXYH24N90C3		44	24	2.7	130	0.55	0.62	–	–	–	240	TO-247AD
IXYH24N90C3D1		44	(24)	2.7	130	0.55	0.62	•	15	1.6	200	TO-247AD
IXYH40N90C3D1		90	40	2.5	150	1.2	0.25	•	25	0.9	500	TO-247AD
IXYH40N90C3		105	40	2.5	150	1.2	0.25	–	–	–	600	TO-247AD
IXYN80N90C3H1		115	(70)	2.7	(98)	(2.5)	0.25	•	42	0.42	500	SOT-227B (miniBLOC)
IXYH60N90C3		140	60	2.7	(165)	(2.15)	0.2	–	–	–	750	TO-247AD
IXYH80N90C3		165	80	2.7	(98)	(2.5)	0.18	–	–	–	830	TO-247AD
IXYT80N90C3		165	80	2.7	(98)	(2.5)	0.18	–	–	–	830	TO-268AA
IXYK140N90C3		310	140	2.7	(125)	(5)	0.09	–	–	–	1630	TO-264
IXYX140N90C3		310	140	2.7	(125)	(5)	0.09	–	–	–	1630	PLUS247
B3 Class (5–30 kHz Switching)												
IXYH40N120B3D1	1200	86	40	2.9	206	2.05	0.26	•	25	0.9	480	TO-247AD
IXYH40N120B3		96	40	2.9	206	2.05	0.26	–	–	–	577	TO-247AD
IXYN100N120B3H1		165	76	2.6	(260)	(10.1)	0.18	•	42	0.42	690	SOT-227B (miniBLOC)
IXYK100N120B3		225	100	2.6	(260)	(10.1)	0.13	–	–	–	1150	TO-264
IXYX100N120B3		225	100	2.6	(260)	(10.1)	0.13	–	–	–	1150	PLUS247
IXYK120N120B3		320	120	2.2	(406)	(27.9)	0.1	–	–	–	1500	TO-264
IXYX120N120B3		320	120	2.2	(407)	(27.9)	0.1	–	–	–	1500	PLUS247
C3 Class (20–50 kHz Switching)												
IXYH20N120C3D1	1200	36	17	3.4	(105)	(0.7)	0.54	•	23	0.9	230	TO-247AD
IXYT20N120C3D1HV		36	17	3.4	(105)	(0.7)	0.54	•	23	0.9	230	TO-268HV
IXYA20N120C3HV		40	20	3.4	(105)	(0.7)	0.54	–	–	–	278	TO-263ABHV
IXYH20N120C3		40	20	3.4	(105)	(0.7)	0.54	–	–	–	278	TO-247AD
IXYP20N120C3		40	20	3.4	(105)	(0.7)	0.54	–	–	–	278	TO-220AB
IXYR50N120C3D1		56	(32)	4	(60)	(1.4)	0.43	•	25	0.9	290	ISOPLUS247™
IXYH30N120C3D1		66	30	4	88	0.9	0.3	•	25	0.9	416	TO-247AD
IXYH30N120C3		75	30	3.3	(140)	(1.6)	0.3	–	–	–	500	TO-247AD
IXYP30N120C3		75	30	3.3	(140)	(1.6)	0.3	–	–	–	500	TO-220AB
IXYH40N120C3D1		80	(40)	3.5	(143)	(2.1)	0.26	•	25	0.9	480	TO-247AD
IXYH40N120C3		90	40	3.5	(143)	(2.1)	0.26	–	–	–	577	TO-247AD
IXYH50N120C3D1		90	50**	4	(60)	(1.4)	0.2	•	25	0.9	625	TO-247AD
IXYH50N120C3		100	50	3.5	60	1.4	0.2	–	–	–	750	TO-247AD
IXYR100N120C3		104	58	3.5	125	3.55	0.31	–	–	–	484	ISOPLUS247™
IXYN82N120C3H1		105	46	3.2	95	3.7	0.25	•	42	0.42	500	SOT-227B (miniBLOC)
IXYN82N120C3		120	66	3.2	95	3.7	0.25	–	–	–	600	SOT-227B (miniBLOC)
IXYN100N120C3H1		134	62	3.5	125	3.55	0.18	•	42	0.42	690	SOT-227B (miniBLOC)
IXYN100N120C3		152	86	3.5	125	3.55	0.18	–	–	–	830	SOT-227B (miniBLOC)
IXYB82N120C3H1		164	82	3.2	95	3.7	0.12	•	42	0.35	1040	ISOPLUS i4-PAC™
IXYK100N120C3		188	100	3.5	125	3.55	0.13	–	–	–	–	TO-264
IXYX100N120C3		188	100	3.5	125	3.55	0.13	–	–	–	–	PLUS247
IXYH82N120C3		200	82	3.2	95	3.7	0.12	–	–	–	–	TO-247AD
IXYK120N120C3		240	120	3.2	(120)	(7.2)	0.1	–	–	–	1500	TO-264
IXYX120N120C3		240	120	3.2	(120)	(7.2)	0.1	–	–	–	1500	PLUS247
IXYN120N120C3		240	120	3.2	(120)	(7.2)	0.13	–	–	–	1200	SOT-227B (miniBLOC)

** T_C = 100 °C


IGBT




X004
TO-252AA




X014a
TO-247AD




X019
TO-268AA




IXA...R...




X005a
TO-220AB



X015a
PLUS247




X020a
TO-264



**IXX...
IXY...**




X011b
TO-263AB




X016a
ISOPLUS247™




X027a
SOT-227B (miniBLOC)



**IXX...D1/H1
IXY...D1/H1**



X011c
TO-263ABHV



X016c
ISO247™

XPT™ IGBT

XPT™ = Xtreme Light Punch Through

Part Number	V _{CES}	I _{C25} IGBT T _C = 25 °C	I _{C110} IGBT T _C = 110 °C	V _{CE(sat)} typ. IGBT T _C = 25 °C	E _{off} IGBT T _J = 125 °C	R _{thJC} IGBT	Diode	I _{F100} Diode T _J = 100 °C	Package
	V	A	A	V	mJ	K/W		A	
1200 V XPT™ IGBT									
IXA4IF1200UC	1200	9	5	1.8	0.25	2.7	•	6	TO-252AA
IXA4IF1200TC		9	5	1.8	0.25	2.7	•	6	TO-268AA
IXA12IF1200HB		20	13	1.8	1.1	1.5	•	14	TO-247AD
IXA12IF1200PB		20	13	1.8	1.1	1.5	•	14	TO-220AB
IXA12IF1200TC		20	13	1.8	1.1	1.5	•	14	TO-268AA
IXA17IF1200HJ		28	18	1.8	1.7	1.26	•	19	ISOPLUS247™
IXA20IF1200HB		38	22	1.8	1.7	0.76	•	24	TO-247AD
IXA20I1200PB		38	22	1.8	1.7	0.76	–	–	TO-220AB
IXA20I1200PZ		38	22	1.8	1.7	0.76	–	–	TO-263ABHV
IXA27IF1200HJ		43	24	1.8	3	0.84	•	25	ISOPLUS247™
IXA33IF1200HB		58	34	1.8	3	0.5	•	33	TO-247AD
IXA37IF1200HJ		58	33	1.8	4.1	0.64	•	25	ISOPLUS247™
IXA45IF1200HB		78	45	1.8	4.1	0.38	•	33	TO-247AD
IXA55I1200HJ		84	54	1.8	5.5	0.43	–	–	ISOPLUS247™
IXA60IF1200NA		88	56	1.8	5.5	0.43	•	51	SOT-227B (miniBLOC)
IXA70I1200NA	100	65	1.8	5.5	0.35	–	–	SOT-227B (miniBLOC)	
1200 V Fast Trench IGBT									
ITF48IF1200HR	1200	72	56 (80°C)	2.05	2.4 (150 °C)	0.38	•	(80°C) 50	ISO247™
FPO									
IXG70IF1200NA	1200	130	86	1.8	5.3 (150 °C)	0.38	•	71	SOT-227B (miniBLOC)

600 V, 1000 V, and 1200 V IGBTs

Part Number	V _{CES}	I _{C25} T _C = 25 °C	I _{C110} T _C = 110 °C	V _{CE(sat)} max. T _C = 25 °C	t _{fi} typ. T _J = 125 °C	E _{off} typ. T _J = 125 °C	R _{thJC} max.	Diode	I _{F110} Diode T _C = 110 °C	R _{thJC} max. Diode	P _C	Package
	V	A	A	V	ns	mJ	K/W		A	K/W	W	
A4 Class (5–20 kHz Switching)												
IXGH48N60A3D1	1200	75	48	1.35	224	5.6	0.42	●	–	0.9	300	TO-247AD
IXGH72N60A3		75	72	1.35	250	6.5	0.23	–	–	–	540	TO-247AD
IXGT72N60A3		75	72	1.35	250	6.5	0.23	–	–	–	540	TO-268AA
IXGX120N60A3		200	120	1.35	260	10.4	0.16	–	–	–	780	PLUS247
IXGK320N60A3		320	210	1.25	740	na	0.13	–	–	–	1000	TO-264a
IXGN320N60A3		320	170	1.25	740	na	0.17	–	–	–	735	SOT-227B (miniBLOC)
IXGN400N60A3		400	190	1.25	270	na	0.15	–	–	–	830	SOT-227B (miniBLOC)
IXGA48N60A3		na	48	1.35	224	5.6	0.42	–	–	–	300	TO-263AB
IXGH48N60A3		na	48	1.35	224	5.6	0.42	–	–	–	300	TO-247AD
IXGP36N60A3		na	36	1.4	325	5.3	0.56	–	–	–	220	TO-220AB
IXGP48N60A3		na	48	1.35	224	5.6	0.42	–	–	–	300	TO-220AB
IXGT32N100A3		75	32	2.2	540	13	0.42	–	–	–	300	TO-268AA
IXGA12N120A3		22	na	3	1035	na	1.25	–	–	–	100	TO-263AB
IXGH12N120A3		22	na	3	1035	na	1.25	–	–	–	100	TO-247AD
IXGP12N120A3		22	na	3	1035	na	1.25	–	–	–	100	TO-220AB
IXGA20N120A3		40	20	2.5	715	10.1	0.69	–	–	–	180	TO-263AB
IXGH20N120A3		40	20	2.5	715	10.1	0.69	–	–	–	180	TO-247AD
IXGP20N120A3		40	20	2.5	715	10.1	0.69	–	–	–	180	TO-220AB
IXGH32N120A3		75	na	2.35	1240	na	0.42	–	–	–	300	TO-247AD
IXGT32N120A3		75	32	2.35	1240	na	0.42	–	–	–	300	TO-268AA
IXGK55N120A3H1		125	55	2.3	282	29	0.27	●	–	0.42	460	TO-264a
IXGX55N120A3H1		125	55	2.3	282	29	0.27	●	–	0.42	460	PLUS247
IXGK120N120A3		240	120	2.2	325	58	0.15	–	–	–	830	TO-264a
IXGX120N120A3		240	120	2.2	325	58	0.15	–	–	–	830	PLUS247
IXGK82N120A3		260	82	2.05	780	22.5	0.1	–	–	–	1250	TO-264a
IXGX82N120A3		260	82	2.05	780	22.5	0.1	–	–	–	1250	PLUS247

IGBT



Very High Voltage NPT IGBTs

2.5 kV – 4.5 kV NPT IGBT

Part Type	V_{ce}	I_{C25} $T_C = 25\text{ }^{\circ}\text{C}$	I_{C110} $T_C = 90\text{ }^{\circ}\text{C}$ (100 $^{\circ}\text{C}$) 110 $^{\circ}\text{C}$	$V_{CE(sat)}$ max. $T_C = 25\text{ }^{\circ}\text{C}$	t_{fi} typ. $T_J = 25\text{ }^{\circ}\text{C}$	E_{off} typ. $T_J = 125\text{ }^{\circ}\text{C}$	R_{thJC} IGBT	P_c	Package
	V	A	A	V	ns	mJ	K/W	W	
IXGA20N250HV	2500	30	12	3.1	930	na	0.83	150	TO-263HV
IXGH25N250		60	25	2.9	200	na	0.5	250	TO-247AD
IXGT25N250		60	25	2.9	200	na	0.5	250	TO-268AA
IXGT25N250HV		60	25	2.9	200	na	0.5	250	TO-268HV
IXGL75N250		110	[65]	2.9	455	na	0.29	430	ISOPLUS264™
IXGK75N250		170	75	2.7	455	na	0.16	780	TO-264
IXGX75N250		170	75	2.7	455	na	0.16	780	PLUS247
IXEL40N400	4000	90	40	3.5	425	205	0.26	380	ISOPLUS264™
IXG50I4500KN	4500	74	-42	3.2	1350	73	0.34	368	ISOPLUS264™

XPT Very High Voltage IGBTs

Part Type	V_{ce}	I_{C25} $T_C = 25\text{ }^{\circ}\text{C}$	I_{C110} $T_C = 90\text{ }^{\circ}\text{C}$ (100 $^{\circ}\text{C}$) 110 $^{\circ}\text{C}$	$V_{CE(sat)}$ max. $T_C = 25\text{ }^{\circ}\text{C}$	t_{fi} typ. $T_J = 25\text{ }^{\circ}\text{C}$	E_{off} typ. $T_J = 125\text{ }^{\circ}\text{C}$	R_{thJC} IGBT	P_c	Package
	V	A	A	V	ns	mJ	K/W	W	
IXYF30N450	4500	23	17	3.9	1220	na	0.54	230	ISOPLUS i4-PAC™
IXYT30N450HV		60	30	3.9	1220	na	0.29	430	TO-268HV
IXYF40N450		60	32	3.9	1120	na	0.43	290	ISOPLUS i4-PAC™
IXYH30N450HV		60	30	3.9	1220	na	0.29	430	TO-247HV
IXYL60N450		90	38	3.3	1360	na	0.3	417	ISOPLUS264™
IXYX40N450HV		95	40	3.9	1120	na	0.19	660	PLUS247HV

Reverse Conducting IGBTs (BiMOSFET™) 1.7 kV–2.5 kV

Part Number	V _{ce}	I _{C25} T _C = 25 °C	I _C T _C = 110 °C	V _{CE(sat)} typ. max. T _C = 25 °C	Q ₉ typ.	t _f (t _{fi}) typ. T _J = 125 °C	R _{thJC} IGBT	Package
	V	A	A	V	ns	mJ	K/W	
IXBH6N170	1700	12	6	2.84	17	600	1.65	TO-247AD
IXBT6N170		12	6	2.84	17	600	1.65	TO-268AA
IXBA16N170AHV		16	10	–	65	–	0.83	TO-263ABHV
IXBH16N170A		16	10	–	65	–	0.83	TO-247AD
IXBT16N170A		16	10	–	65	–	0.83	TO-268AA
IXBT16N170AHV		16	10	–	65	–	0.83	TO-268HV
IXBH10N170		20	10	3.4	30	–	0.89	TO-247AD
IXBT10N170		20	10	3.4	30	–	0.89	TO-268AA
IXBN42N170A		38	21	5.2	188	–	0.4	SOT-227B (miniBLOC)
IXBH16N170		40	16	–	72	705	0.5	TO-247AD
IXBH42N170A		42	21	5.2	188	–82	0.35	TO-247AD
IXBT42N170A		42	21	5.2	188	–82	0.35	TO-268AA
IXBR42N170		57	32	–	188	740	0.62	ISOPLUS247™
IXBH24N170		60	24	–	140	960	0.5	TO-247AD
IXBT24N170		60	24	–	140	960	0.5	TO-268AA
IXBH42N170		80	42	–	188	740	0.35	TO-247AD
IXBT42N170		80	42	–	188	740	0.35	TO-268AA
IXBX75N170A		110	65	4.95	358	–175	0.12	PLUS247
IXBN75N170		145	75	2.6	350	580	0.2	SOT-227B (miniBLOC)
IXBK75N170		200	75	2.6	350	580	0.12	TO-264
IXBX75N170		200	75	2.6	350	580	0.12	PLUS247
IXCH36N250	2500	73	36	2.6	177	900	0.21	TO-247AD
IXCK36N250		73	36	2.6	177	900	0.21	TO-264
IXBL64N250		116	46	2.5	400	175	0.25	ISOPLUS264™
IXBK64N250		156	64	2.5	400	175	0.17	TO-264
IXBX64N250		156	64	2.5	400	175	0.17	PLUS247

Reverse Conducting IGBTs (BiMOSFET™) 3 kV

Part Number	V _{ce}	I _{C25} T _C = 25 °C	I _C T _C = 110 °C	V _{CE(sat)} typ. max. T _C = 25 °C (110 °C)	Q ₉ typ.	t _f (t _{fi}) typ. T _J = 125 °C	R _{thJC} IGBT	Package
	V	A	A	V	ns	mJ	K/W	
IXBH10N300	3000	30	10	2.8	45	1030	0.69	TO-247AD
IXBA10N300HV		34	10	2.2	46	2010	0.69	TO-263ABHV
IXBH10N300HV		34	10	2.2	46	2010	0.69	TO-247HV
IXBF22N300		38	22	2.2	110	1650	0.83	ISOPLUS i4-PAC™
IXBA14N300HV		38	14	2.2	62	1730	0.62	TO-263ABHV
IXBH14N300HV		38	14	2.2	62	1730	0.62	TO-247HV
IXBF32N300		40	22	2.8	142	630	0.78	ISOPLUS i4-PAC™
IXBF42N300		60	24	2.5	200	490	0.52	ISOPLUS i4-PAC™
IXBT22N300HV		60	22	2.2	110	1650	0.43	TO-268HV
IXBH22N300HV		60	22	2.2	110	1650	0.43	TO-247HV
IXBX28N300HV		62	28	2.3	110	3280	0.36	PLUS247HV
IXBH32N300		80	32	2.8	142	630	0.31	TO-247AD
IXBH32N300HV		80	32	2.8	142	630	0.31	TO-247HV
IXBT32N300HV		80	32	2.8	142	630	0.31	TO-268HV
IXBF55N300		86	34	2.7	335	260	0.35	ISOPLUS i4-PAC™
IXBH42N300HV		104	42	2.5	200	490	0.25	TO-247HV
IXBT42N300HV		104	42	2.5	200	490	0.25	TO-268HV
IXBK55N300		130	55	2.7	335	260	0.2	TO-264
IXBX55N300		130	55	2.7	335	260	0.2	PLUS247

Diodes for High Switching Frequencies

Fast Recovery Epitaxial Diodes (HiPerFRED, FRED) and FRD (SONIC)

Power semiconductor switches (IGBT, MOSFET, BJT, GTO) used in electronics applications are only as effective as their associated free wheeling diodes. As higher frequencies increase, the overall performance and efficiency of the power switch - aside from conduction - is largely influenced by the diode's turn-off behavior, characterized by parameters such as Q_{rr} , I_{RM} , and t_{rr} (see figure below). With optimized ultra-fast switching diodes, the design engineer has various possibilities including: higher pulse rate, higher current load, smaller heatsink, or more conservative operation due to cooler chips.

The reverse current characteristic following the peak reverse-current I_{RM} is an important property of our diodes. The slope of the decaying reverse current (di/dt) is determined by device parameters, including semiconductor technology and diffusion profiles. Within circuit, this decay rate interacts with parasitic inductances (e.g., connecting leads), leading to over-voltage spikes and high-frequency electromagnetic interference (EMI). A high di/dt ("hard recovery" or "snap-off" behavior), increases electrical stress on both the diode and the paralleled switch. In contrast, a slow decay of the reverse current ("soft recovery" behavior) is preferred, and this is designed into all Littelfuse FRD and FRED diodes. These diodes are available in a wide range of available blocking voltages makes it possible to apply these diodes as output rectifiers in switch-mode power supplies (SMPS) as well as protective and free-wheeling diodes in inverters.

Silicon Carbide (SiC) Schottky Barrier Diodes

SiC Schottky Barrier Diodes (SBDs) significant advantages for high-efficiency high power density applications compared to Si devices. The reverse recovery (RR) behavior associated with minority carrier extraction during forced diode turnoffs can be minimized, when comparing SiC SBDs to Si P-N junction diodes. As a result, switching losses are ultra-low and largely independent of di/dt , current level, and temperature. In addition, the positive temperature coefficient of SiC SBDs enables simple paralleling of devices. The merged p-n Schottky (MPS) device architecture enhances surge capability and provides low leakage.

Diodes for General Purpose Applications



Rectifier Diodes

DC series diodes (anode on stud) and of the DSI-series (cathode on stud) are designed for rectifying 50 or 60 Hz main currents. These diodes are available plastic and metal housings, along with different diode bridges, are available for standard line voltages from 110 V to 690 V AC.


Avalanche Diodes

Avalanche diodes or surge-voltage-proof rectifier diodes of the series DSA (anode on stud) and DSAI (cathode on stud) differ from standard DS and DSI series diodes by their ability to operate in avalanche mode. These devices can tolerate operation above the rated reverse blocking voltage (VRRM) as long as the power remains within the specified maximum permissible non-repetitive reverse surge dissipation (PRSM) for the defined pulse width. Precise control of the avalanche breakdown require homogeneous doping of the middle zone of the silicon chip and optimized junction termination and passivation at the edges where PN-junctions are exposed to the surface (high field strength). Due to their robustness against transient reverse overvoltage events, these diodes can often be used without protective overvoltage circuits. In high-voltage applications, series connected avalanche diodes benefit from even voltage distribution for steady-state and transient conditions [due to the blocking characteristic of the sharp avalanche breakdown]. As a result, no single diode is overstressed by excessive reverse voltages beyond the avalanche threshold. For this reason, all high-voltage rectifier modules are typically assembled with avalanche diodes.


Current and Voltage During Turn-On and Turn-Off Switching of Fast Diodes

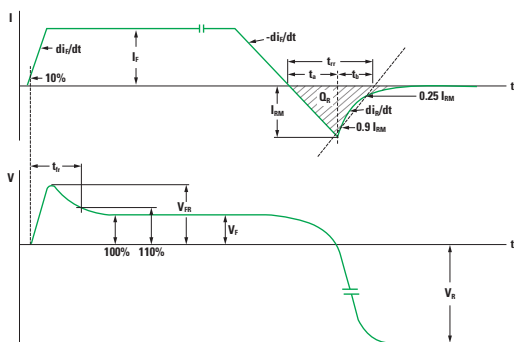


DS...I...




DS...X...




DS...IM...



DS...C...



DS...P...



DS...I...NA



X004
TO-252AA



X005a
TO-220AB



X005b
TO-220AC



X007a
TO-220ABFP



X007b
TO-220ACFP




X008a
TO-262AA (I²-PAK)



X011b
TO-263AB



X014a
TO-247AD



X017a
TO-3P



X027a
SOT-227B (miniBLOC)

Schottky Gen² Diodes

Part Number	V _{RRM}	I _{FAV} @ T _C		V _F @ I _F		T _{VJM}	R _{thJC}	Package
		d = 0.5		T _{VJ} = 125 °C				
	V	A	°C	V	A	°C	K/W	
DSB20I15PA	15	20	130	0.39	20	150	1.75	TO-220AC
DSB40C15PB		2 × 20	130	0.39	20	150	1.75	TO-220AB
DSB15IM30UC	30	15	130	0.44	15	150	2.00	TO-252AA
DSB30C30PB		2 × 15	135	0.44	15	150	1.75	TO-220AB
DSB60C30PB		2 × 30	130	0.49	30	150	0.85	TO-220AB
DSB10I45PM	45	10	115	0.52	10	150	4.50	TO-220ACFP
DSA20C45PB		2 × 10	160	0.64	10	175	2.40	TO-220AB
DSA15I45PA		15	155	0.63	15	175	1.75	TO-220AC
DSA15IM45UC		15	150	0.63	15	175	2.00	TO-252AA
DSA15IM45IB		15	155	0.63	15	175	1.75	TO-262AA (I2-PAK)
DSB15IM45IB		15	130	0.60	15	150	1.75	TO-262AA (I2-PAK)
DSA30C45PB		2 × 15	155	0.63	15	175	1.75	TO-220AB
DSA30C45PC		2 × 15	155	0.63	15	175	1.75	TO-263AB
DSB30C45PB		2 × 15	130	0.60	15	150	1.75	TO-220AB
DSA60C45PB		2 × 30	155	0.70	30	175	0.85	TO-220AB
DSB60C45PB		2 × 30	125	0.64	30	150	0.85	TO-220AB
DSA60C45HB		2 × 30	159	0.71	30	175	0.90	TO-247AD
DSB60C45HB		2 × 30	113	0.62	30	125	0.80	TO-247AD
DSA80C45HB		2 × 40	152	0.61	40	175	0.40	TO-247AD
DSA20C60PB	60	2 × 10	155	0.70	10	150	2.40	TO-220AB
DSA20C60PN		2 × 10	140	0.70	10	150	4.80	TO-220ABFP
DSB20C60PN		2 × 10	110	0.62	10	150	4.50	TO-220ABFP
DSA30C60PB		2 × 15	155	0.72	15	175	1.75	TO-220AB
DSB30C60PB		2 × 15	130	0.64	15	150	1.75	TO-220AB
DSA60C60PB		2 × 30	155	0.77	30	175	0.85	TO-220AB
DSB60C60PB		2 × 30	125	0.69	30	150	0.85	TO-220AB
DSA60C60HB		2 × 30	159	0.77	30	175	0.90	TO-247AD
DSA10I100PM	100	10	140	0.71	10	175	4.50	TO-220ACFP
DSA10IM100UC		10	150	0.71	10	175	3.00	TO-252AA
DSA20C100PB		2 × 10	155	0.71	10	175	2.40	TO-220AB
DSA20C100PN		2 × 10	140	0.71	10	175	4.50	TO-220ABFP
DSA30C100PB		2 × 15	155	0.73	15	175	1.75	TO-220AB
DSA30C100PN		2 × 15	120	0.73	15	175	4.20	TO-220ABFP
DSA30C100HB		2 × 15	168	0.72	15	175	0.80	TO-247AD
DSA30C100QB		2 × 15	155	0.72	15	175	1.75	TO-3P
DSA50C100HB		2 × 25	162	0.72	25	175	0.70	TO-247AD
DSA50C100QB		2 × 25	155	0.72	25	175	0.95	TO-3P
DSA30I100PA		30	150	0.78	30	175	0.85	TO-220AC
DSA60C100PB		2 × 30	150	0.78	30	175	0.85	TO-220AB
DSA70C100HB		2 × 35	151	0.76	35	175	0.90	TO-247AD
DSA80C100PB		2 × 40	150	0.80	40	175	0.60	TO-220AB

Diodes



X004
TO-252AA



X005a
TO-220AB



X005b
TO-220AC



X007a
TO-220ABFP



X008a
TO-262AA (I²-PAK)



X011b
TO-263AB




X016c
ISO247™



X014a
TO-247AD



X014b
TO-247AD



X017a
TO-3P




X024a
ISOPLUS i4-PAC™




X027a
SOT-227B (miniBLOC)




X030a
SMPD -B




DS...C...




DS...I...NA



DS...IM...








DS...I...



DS...X...

Schottky Gen² Diodes

Part Number	V _{RRM} V	I _{FAV} @ T _C d = 0.5		V _F @ I _F T _{VJ} = 125 °C		T _{VJM} °C	R _{thJC} K/W	Package
		A	°C	V	A			
DSA10C150PB	150	2 × 5	160	0.71	5	175	4.80	TO-220AB
DSA10C150UC		2 × 5	155	0.71	5	175	4.80	TO-252AA
DSA20C150PB		2 × 10	140	0.73	10	175	2.40	TO-220AB
DSA20C150PN		2 × 10	140	0.73	10	175	4.50	TO-220ABFP
DSA15IM150UC		15	150	0.75	15	175	2.00	TO-252AA
DSA30C150PB		2 × 15	155	0.75	15	175	1.75	TO-220AB
DSA30C150PC		2 × 15	155	0.75	15	175	1.75	TO-263AB
DSA50C150HB		2 × 25	162	0.72	25	175	0.70	TO-247AD
DSA30I150PA		30	150	0.80	30	175	0.85	TO-220AC
DSA60C150PB		2 × 30	150	0.80	30	175	0.85	TO-220AB
DSA70C150HB		2 × 35	155	0.76	35	175	0.70	TO-247AD
DSA120C150QB		2 × 60	150	0.85	60	175	0.40	TO-3P
DSA120X150LB		2 × 60	150	0.80	60	175	0.80	SMPD-B
DSA240X150NA		2 × 120	110	0.85	120	150	0.50	SOT-227B (miniBLOC)
DSA20C200PB	200	2 × 10	155	0.75	10	175	2.40	TO-220AB
DSA15IM200UC		15	150	0.78	15	175	2.00	TO-252AA
DSA30C200IB		2 × 15	155	0.78	15	175	1.75	TO-262AA (I²-PAK)
DSA30C200PB		2 × 15	155	0.78	15	175	1.75	TO-220AB
DSA30C200PC		2 × 15	155	0.78	15	175	1.75	TO-263AB
DSA70C200HB		2 × 35	155	0.78	35	175	0.70	TO-247AD
DSA90C200HB		2 × 45	148	0.78	45	175	0.70	TO-247AD
DSA90C200HR		2 × 45	110	0.80	45	175	0.70	ISO-247
DSA120X200LB		2 × 60	150	0.87	60	175	0.80	SMPD-B
DSA240X200LB		2 × 120	150	0.87	120	175	0.40	SMPD-B
DSA240X200NA		2 × 120	110	0.87	120	150	0.50	SOT-227B (miniBLOC)

**DSS...****DSSS...****DSSK...****DSS 2x...****DSS 2x...**

Schottky Diodes

Part Number	V _{RRM}	I _{FAV} @ T _C		V _F @ I _F		T _{VJM}	R _{thJC}	Package
		d = 0.5		T _{VJ} = 125 °C				
	V	A	°C	V	A	°C	K/W	
DSS40-0008D	8	40	88	–	–	100	0.70	TO-247AD
DSSK80-0008D		2 × 40	88	–	–	100	0.70	TO-247AD
DSS20-0015B	15	20	135	0.33	20	150	1.40	TO-220AC
DSSK40-0015B		2 × 20	92	–	–	100	0.70	TO-247AD
DSS6-0025BS	25	6	140	0.35	6	150	3.00	TO-252AA
DSS25-0025B		25	125	0.45	25	150	1.40	TO-220AC
DSSK18-0025BS		2 × 10	140	0.37	10	150	1.70	TO-263AB
DSSK38-0025B		2 × 20	130	0.40	20	150	1.40	TO-220AB
DSSK38-0025BS		2 × 20	130	0.40	20	150	1.40	TO-263AB
DSSK80-0025B		2 × 40	108	0.42	40	125	0.40	TO-247AD
DSSK48-003BS	30	2 × 25	130	0.40	20	150	1.20	TO-263AB
DSSK80-003B		2 × 40	108	0.42	40	125	0.40	TO-247AD
DSS6-0045AS	45	6	165	0.53	6	175	3.00	TO-252AA
DSS10-0045B		10	135	0.50	10	150	1.70	TO-220AC
DSS16-0045A		16	160	0.60	16	175	1.40	TO-220AC
DSS16-0045AS		16	160	0.60	16	175	1.40	TO-263AB
DSS25-0045A		25	155	0.64	25	175	1.10	TO-220AC
DSS60-0045B		60	94	0.56	60	125	0.70	TO-247AD
DSSK20-0045B		2 × 10	135	0.46	10	150	1.70	TO-220AB
DSSK28-0045BS		2 × 15	135	0.43	15	150	1.40	TO-263AB
DSSK60-0045A		2 × 30	159	0.55	30	175	0.40	TO-247AD
DSSK80-0045B		2 × 40	108	0.49	40	125	0.70	TO-247AD
DSS2x61-0045A		2 × 60	110	0.62	60	150	0.50	SOT-227B (miniBLOC)
DSS2x81-0045B		2 × 80	110	0.60	80	150	0.50	SOT-227B (miniBLOC)
DSS2x121-0045B		2 × 120	110	0.59	120	150	0.50	SOT-227B (miniBLOC)
DSS10-006A	60	10	160	0.65	10	175	1.70	TO-220AC
DSSK28-006BS		2 × 15	135	0.52	15	150	1.40	TO-263AB
DSSK80-006B		2 × 40	108	0.63	40	125	0.40	TO-247AD
DSSK70-008A	80	2 × 35	159	0.65	35	175	0.70	TO-247AD
DSS2x111-008A		2 × 110	110	0.82	100	150	0.50	SOT-227B (miniBLOC)
DSS10-01A	100	10	160	0.66	10	175	1.70	TO-220AC
DSS10-01AS		10	160	0.66	10	175	1.70	TO-263AB
DSS16-01A		16	155	0.65	16	175	1.40	TO-220AC
DSS16-01AS		16	155	0.65	16	175	1.40	TO-263AB
DSSK16-01A		2 × 8	165	0.63	8	175	1.70	TO-220AB
DSSK16-01AS		2 × 8	165	0.63	8	175	1.70	TO-263AB
DSSK28-01AS		2 × 15	160	0.64	15	175	1.40	TO-263AB
DSSK50-01A		2 × 25	164	0.61	25	175	0.70	TO-247AD
DSS2x41-01A		2 × 40	110	0.70	40	150	0.50	SOT-227B (miniBLOC)
DSS2x61-01A		2 × 60	110	0.74	60	150	0.50	SOT-227B (miniBLOC)

Diodes



Schottky Diodes



Part Number	V_{RRM} V	$I_{FAV} @ T_C$ d = 0.5		$V_F @ I_F$ $T_{VJ} = 125 ^\circ C$		T_{VJM} °C	R_{thJC} K/W	Package
		A	°C	V	A			
DSS6-015AS	150	6	165	0.65	6	175	3.0	TO-252AA
DSSK20-015A		2 x 10	165	0.65	10	175	1.4	TO-220AB
DSSK50-015A		2 x 25	163	0.68	25	175	0.7	TO-247AD
DSSK60-015A		2 x 30	160	0.70	30	175	0.7	TO-247AD
DSS2X101-015A		2 x 100	110	0.84	100	150	0.50	SOT-227B (miniBLOC)
DSSK10-018A	180	2 x 5	165	0.66	5	175	1.7	TO-220AB
DSSK30-018A		2 x 15	165	0.72	15	175	0.9	TO-247AD
DSSK60-02A	200	2 x 30	159	0.71	30	175	0.7	TO-247AD
DSS2X101-02A		2 x 100	110	0.89	100	150	0.50	SOT-227B (miniBLOC)

Traditional Schottky (MBR)



Part Number	V_{RRM} V	$I_{FAV} @ T_C$ d = 0.5		$V_F @ I_F$ $T_J = 125 ^\circ C$		T_{JM} °C	R_{thJC} K/W	Package
		A	°C	V	A			
MBR1045	45	10	115	—	—	150	2.0	TO-220AC
MBRF2045CT		2 x 10	105	0.72	20	150	5.0	ITO-220AB
MBR6045WT		2 x 30	135	0.55	30	150	1.0	TO-247AD
MBRB1060CT	60	2 x 5	105	0.65	5	150	2.0	D²PAK(TO-263)
MBRF1060CTL		2 x 5	75	—	—	125	3.5	ITO-220AB
MBR1060CTL		2 x 5	100	—	—	125	2.0	TO-220AB
MBRB2060CT		2 x 10	105	—	—	150	2.3	D²PAK(TO-263)
MBRF2060CT		2 x 10	105	—	—	150	2.3	ITO-220AB
MBR2060CT		2 x 10	100	0.70	10	150	2.3	TO-220AB
MBRF3060CT		2 x 15	95	0.67	15	150	3.0	ITO-220AB
MBRB10100CT		2 x 5	105	0.75	5	150	6.0	D²PAK(TO-263)
MBRD10100CT	100	2 x 5	105	0.75	5	150	6.0	DPAK(TO-252)
MBRF10100CTL		2 x 5	135	0.75	5	150	4.5	ITO-220AB
MBRF10100CTR		2 x 5	105	0.75	5	150	4.5	ITO-220AB
MBR10100CT		2 x 5	100	0.75	5	150	2.0	TO-220AB
MBRB20100CT		2 x 10	105	0.80	10	150	2.0	D²PAK(TO-263)
MBRF20100CTP		2 x 10	105	0.80	10	150	3.5	ITO-220AB
MBR20100CTP		2 x 10	105	0.80	10	150	3.5	TO-220AB
MBRF30100CTP		2 x 15	133	0.70	15	150	2.0	ITO-220AB
MBR40100WT		2 x 20	135	0.74	20	150	2.0	TO-247AD

Traditional Schottky (MBR)

Part Number	V _{RRM}	I _{FAV} @ T _C		V _F @ I _F		T _{JM}	R _{thJC}	Package
		d = 0.5		T _J = 125 °C				
	V	A	°C	V	A	°C	K/W	
MBRD10150CT	150	2 x 5	105	0.80	5	150	4.5	DPAK (TO-252)
MBRF10150CTL		2 x 5	100	0.73	5	150	4.5	ITO-220AB
MBR10150CT		2 x 5	105	0.73	5	150	4.5	TO-220AB
MBR20150CT		2 x 10	125	0.83	10	175	1.5	TO-220AB
MBRF20150CT		2 x 10	100	0.80	10	175	3.5	ITO-220AB
MBRF30150CT		2 x 15	133	0.80	15	150	2.0	ITO-220AB
MBRD10200CT	200	2 x 5	105	0.74	5	150	3.5	DPAK (TO-252)
MBRF10200CT		2 x 5	105	0.78	5	150	4.5	ITO-220AB
MBR10200CT		2 x 5	105	0.78	5	150	3.5	TO-220AB
MBRF20200CT		2 x 10	105	0.85	10	175	4.5	ITO-220AB
MBRF20200CTR		2 x 10	105	0.85	10	175	4.5	ITO-220AB
MBRF30200CT		2 x 15	109	0.75	15	150	3.3	ITO-220AB

Ultralow Trench Schottky (DST)



Part Number	V _{RRM}	I _{FAV} @ T _C		V _F @ I _F		T _{JM}	R _{thJC}	Package
		d = 0.5		T _J = 125 °C				
	V	A	°C	V	A	°C	K/W	
DST2045AX	45	20	25 ^b	0.50	20	150	–	P600
DSTB2045C		2 x 10	80	0.42	10	150	3.0	D ² PAK (TO-263)
DSTF2045C		2 x 10	80	0.52	10	150	6.0	ITO-220AB
DST2045C		2 x 10	80	0.52	10	150	3.0	TO-220AB
DSTF3045C		2 x 15	90	0.45 ^a	15	150	5.0	ITO-220AB
DSTF4045C		2 x 20	90	0.51 ^a	20	150	5.0	ITO-220AB
DSTF2050C	50	2 x 10	110	0.44 ^a	10	150	6.0	ITO-220AB
DSTF4050C		2 x 20	90	0.55	20	150	5.0	ITO-220AB
DST2060DJF	60	20	80	0.70	20	150	2.6	PDFNWB5 × 6-8L
DST2060C		2 x 10	125	0.59	10	150	3.0	TO-220AB
DSTF2060C		2 x 10	85	0.59	10	150	6.0	ITO-220AB
DST3060DJF		30	80	0.72	30	150	2.6	PDFNWB5 × 6-8L
DST3060LC		2 x 15	105	0.44 ^a	15	125	5.0	TO-220AB
DSTF3060C		2 x 15	60	0.65	15	150	6.0	ITO-220AB
DSTF3060CR		2 x 15	60	0.65	15	150	6.0	ITO-220AB
DSTF4060C		2 x 20	85	0.57	20	150	5.0	ITO-220AB
DSTF2080C	80	2 x 10	85	0.70	10	150	6.0	ITO-220AB
DST2080C		2 x 10	125	0.70	10	150	3.0	TO-220AB
DSTF3080C		2 x 15	60	0.70	15	150	6.0	ITO-220AB
DST3080C		2 x 15	100	0.70	15	150	2.5	TO-220AB
DSTF20100C	100	2 x 10	100	0.70	10	150	5.5	ITO-220AB
DSTF30100C		2 x 15	95	0.70	15	150	5.5	ITO-220AB
DSTF30100S		30	70	0.78	30	150	4.0	ITO-220AB
DST20100C		2 x 10	120	0.70	10	150	2.8	TO-220AB
DST30100C		2 x 15	115	0.70	15	150	2.5	TO-220AB
DSTF40100C		2 x 20	85	0.70	20	150	4.0	ITO-220AB
DST40100C		2 x 20	115	0.70	20	150	2.0	TO-220AB
DSTB60100C		2 x 30	105	0.80	30	150	2.0	D ² PAK (TO-263)
DSTF60100C	2 x 30	105	0.80	30	150	5.0	ITO-220AB	
DSTF20120C	120	2 x 10	74	0.72	10	150	5.0	ITO-220AB
DSTF20120CR		2 x 10	74	0.72	10	150	5.0	ITO-220AB
DSTF30120C		2 x 15	80	0.76	15	150	4.5	ITO-220AB
DSTF30120CR		2 x 15	80	0.76	15	150	4.5	ITO-220AB
DSTF40120C		2 x 20	74	0.76	20	150	4.0	ITO-220AB
DSTF20150CR	150	2 x 10	80	0.80	10	150	5.0	ITO-220AB
DST20150C		2 x 10	105	0.80	10	150	2.8	TO-220AB
DSTF30150C		2 x 15	50	0.79	15	150	4.5	ITO-220AB
DSTF40150C		2 x 20	70	0.82	20	150	4.0	ITO-220AB
DST5200	200	5	100	0.73	5	150	3.5	TO-220AC
DSTD5200		5	100	0.73	5	150	2.4	DPAK (TO-252)
DSTF10200C		2 x 5	90	0.73	5	150	7.0	ITO-220AB
DSTB30200C		2 x 15	100	0.72	15	150	2.0	D ² PAK (TO-263)

a: Typical value
b: T_A , Ambient temperature

Ultralow Trench Schottky (DST, TO-277B)



Part Number	V _{RRM}	I _{FAV} @ T _L		V _F @ I _F		T _{JM}	R _{thJL}	Package
		d = 0.5		T _{VJ} = 25 °C				
	V	A	°C	V	A	°C	K/W	
DST1040S-A	40	10	125	0.50	10	150	3.5	TO-277B
DST1040S		10	125	0.41 ^a	10	150	3.5	TO-277B
DST1045S-A	45	10	125	0.50	10	150	3.5	TO-277B
DST1045S		10	125	0.50	10	150	3.5	TO-277B
DST1545S	50	15	125	0.51	15	150	3.5	TO-277B
DST1050S-A		10	125	0.49	10	150	3.5	TO-277B
DST1050S		10	125	0.49	10	150	3.5	TO-277B
DST1550S		15	125	0.50	15	150	3.5	TO-277B
DST2050S	60	20	125	0.60	20	150	3.5	TO-277B
DST560S-A		5	125	0.60	5	150	4.0	TO-277B
DST560S		5	125	0.60	5	150	4.0	TO-277B
DST860S-A		8	125	0.55	8	150	4.0	TO-277B
DST860S	80	8	125	0.55	8	150	4.0	TO-277B
DST580S-A		5	125	0.66	5	150	4.0	TO-277B
DST580S		5	125	0.66	5	150	4.0	TO-277B
DST2080S		20	85 ^b	0.65	20	150	—	TO-277B
DST5100S-A	100	5	125	0.70	5	150	4.0	TO-277B
DST5100S		5	125	0.70	5	150	4.0	TO-277B
DST8100S-A		8	125	0.62	8	150	4.0	TO-277B
DST8100S		8	125	0.62	8	150	4.0	TO-277B
DST10100S-A		10	125	0.65	10	150	3.5	TO-277B
DST10100S		10	125	0.65	10	150	3.5	TO-277B
DST12100S		12	125	0.64	12	150	3.5	TO-277B

a: Typical value


b: T_A , Ambient temperature

Ultrafast Diodes


Part Number	V _{RRM}	I _{FAV} @ T _L		V _F @ I _F		I _{FSM}	T _{rr}	T _{VJM}	R _{thJC}	Package
		d = 0.5		T _{VJ} = 25 °C		8.3 ms, 25 °C	I _F = 500 mA, I _R = 1 A, I _{rrm} = 250 mA			
	V	A	°C	V	A	A	nS	°C	K/W	
DURB2020CT	200	2 x 10	100	1.15	10	125	35	150	3.5	D2PAK (TO-263)
DURF1030CT	300	2 x 5	112	1.3	5	80	45	150	3.5	ITO-220AB
DURF1030CTR		2 x 5	112	1.3	5	80	45	150	3.5	ITO-220AB
DUR2030CT		2 x 10	100	1.3	10	125	45	150	5	TO-220AB
DUR6030WT		2 x 30	100	1.3	30	400	45	150	2	TO-247AD
DURB1640CT	400	2 x 8	105	1.3	8	80	45	150	5	TO-263
DURF1040CT		2 x 5	112	1.3	5	80	45	150	3.5	ITO-220AB
DURF1040CTR		2 x 5	112	1.3	5	80	45	150	3.5	ITO-220AB
DURF2040CT		2 x 10	100	1.3	10	125	45	150	5	ITO-220AB
DURF840		8	55	1.3	8	80	45	150	5	ITO-220AC
DUR1040CT		2 x 5	112	1.3	5	80	45	150	3.5	TO-220AB
DUR6040WT		2 x 30	100	1.41	30	360	45	150	0.95	TO-247AD
DURD560A		5	100	1.7	5	60	35	150	4.5	DPAK (TO-252)
DURF1060CT	600	2 x 5	100	1.55	5	60	50	150	5	ITO-220AB
DURF3060CT		2 x 15	105	2.03	15	110	50	150	1.6	ITO-220AB
DURF1060		10	105	2.2	10	100	32	150	6	ITO-220AC
DUR3060CT		2 x 15	105	2.03	15	110	50	150	1.6	TO-220AB
DUR6060W	1200	60	70	2	60	600	50	150	0.75	TO-247AC
DUR30120		30	115	2.75	30	80	100	150	0.9	TO-220AC
DUR60120W		60	90	3.5	60	280	100	150	0.65	TO-247AC
DUR75120W		75	90	3.5	60	500	100	150	0.65	TO-247AC

HiPerDyn™ FRED

Series connected diodes for high switching frequencies;
packages isolated (2500 V_{RMS})



DSEP 2x....-...C




DPH...IS...
DSEP/DSS....-...C

Part Number	V _{RRM}	I _{FAV}	T _C	V _F	@ T _{VJ}	t _{rr} typ.	I _{RM} typ.	@ -di/dt	T _{VJM}	R _{thJC}	Package
		d = 0.5		I _F = I _{FAV}		T _{VJ} = 25 °C					
	V	A	°C	V	°C	ns	A	A/μs	°C	K/W	
DSS17-06CR	600	17	95	2.71	125	45	2.0	100	175	1.40	ISOPLUS247™
DPH30IS600HI		30	140	1.89	150	35	3.0	200	175	0.55	ISOPLUS247™
DSEP15-12CR	1200	15	135	2.67	150	15	10.0	600	175	1.00	ISOPLUS247™
DSEP30-12CR		30	120	3.18	150	15	5.5	600	175	0.60	ISOPLUS247™
DSEP2x25-12C	1200	2 × 25	90	2.95	150	15	5.5	600	150	0.60	SOT-227B (miniBLOC)
DPJ50XS1800NA	1800	2 × 25	90	4.33	150	15	4.0	600	150	0.40	SOT-227B (miniBLOC)

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

Dual Ultrafast Diodes

Series connected diodes for high switching frequencies with middle connection; packages isolated (2500 V_{RMS})




DHH/DSEE
DPF/G... P..

Part Number	V _{RRM}	I _{FAV}	T _C	V _F	@ T _{VJ}	t _{rr} typ.	I _{RM} typ.	@ -di/dt	T _{VJM}	R _{thJC}	Package
		d = 0.5		I _F = I _{FAV}		T _{VJ} = 25 °C					
	V	A	°C	V	°C	ns	A	A/μs	°C	K/W	
DPG30P300PJ	2 × 300	30	135	0.99	150	35	3	200	175	1.05	ISOPLUS220™
DPG10P400PJ	2 × 400	10	145	1.03	150	45	4	200	175	2.5	ISOPLUS220™
DPG30P400PJ	2 × 400	30	135	1.05	30	45	4	200	175	1.05	ISOPLUS220™
DSEE15-12CC	2 × 600	15	100	1.50	125	35	4	100	175	1.6	ISOPLUS220™
DSEE29-12CC	2 × 600	30	90	1.75	125	30	4	100	175	0.9	ISOPLUS220™
DPF30P600HR	2 × 600	30	130	1.27	150	35	17	600	175	0.9	ISO247™
DSEE30-12A	2 × 600	30	90	1.78	125	30	4	100	175	0.9	TO-247AD
DSEE55-24N1F	2 × 1200	60	110	1.56	150	75	35	600	175	0.6	ISOPLUS i4-PAC™
DHH55-36N1F	2 × 1800	60	50	2.06	125	230	60	800	150	0.6	ISOPLUS i4-PAC™



Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

Silicon Carbide Schottky Diodes



X014a
TO-247AD


X014b
TO-247AD




Part Number	V _{RRM}	I _{FAV}	@ T _C	V _F	Q _C	R _{thJC}	Package
		DC		DC @ 25 °C T _{Vj}			
	V	A	°C	V	nC	K/W	
DCK10I650HA	650	10	152	1.37	25.5	1.3	TO247-2
DCK10I650PA	650	14.5	135	1.37	25.5	1.4	TO220-2
DCK20I650HA	650	20	144	1.45	47.9	0.85	TO247-2
DCK10I1200HA	1200	10	155	1.48	62	0.85	TO247-2
DCK10I1200PA	1200	10	153	1.48	62	0.98	TO220-2
DCK10I1200UZ	1200	10	158	1.48	59	0.8	TO252-2
DCK15I1200HA	1200	15	153	1.48	88	0.68	TO247-2
DCK20I1200HA	1200	20	151	1.48	107	0.55	TO220-2
DCK20I1200PC	1200	20	135	1.48	94	0.9	TO263-2
DCK30I1200HA	1200	30	148	1.48	153	0.4	TO220-2
DCK40I1200HA	1200	40	142	1.48	192	0.35	TO220-2
Common Cathode							
DCK20C650HB	650	10 / 20	152	1.37	25.5 / 51	1.3 / 0.65	TO247-3
DCK20C1200HB	1200	10 / 20	153	1.48	62 / 124	0.85 / 0.42	TO247-3
DCK30C1200HB	1200	15 / 30	153	1.48	88 / 176	0.68 / 0.34	TO247-3
DCK40C1200HB	1200	20 / 40	151	1.48	107 / 214	0.55 / 0.27	TO247-3

1 per leg/component


HiPerFRED 2™ Diodes




DPF/G/H...I*...




DPG...P...




DPF/G...C...



DPF...XA...



DPF...X...



DPF...C...

Part Number	V_{RRM}	I_{FAV} d = 0.5	@ T_C	I_{FSM} 10 ms 45 °C	V_F @ I_F $T_{VJ} = 150\text{ °C}$	t_{rr}	I_{RM}	-di/dt	T_{VJM}	R_{thJC}	Package
	V	A	°C	A	V	ns	A	A/μs	°C	K/W	
DPG10I200PA	200	10	145	140	0.98	10	35	3	200	175	TO-220AC
DPG10I200PM		10	125	140	0.98	10	35	3	200	175	TO-220ACFP
DPG20C200PB	200	2 × 10	145	140	0.98	10	35	3	200	175	TO-220AB
DPG20C200PN		2 × 10	125	140	0.98	10	35	3	200	175	TO-220ABFP
DPG15I200PA	200	15	140	240	1.01	15	35	3	200	175	TO-220AC
DPG30C200PB		2 × 15	140	240	1.01	15	35	3	200	175	TO-220AB
DPG30C200PC	200	2 × 15	140	240	1.01	15	35	3	130	175	TO-263AB
DPG30C200HB		2 × 15	140	240	1.00	15	35	3	200	175	TO-247AD
DPF60C200HB	200	2 × 30	130	400	0.98	30	35	4	200	175	TO-247AD
DPF60C200HJ		2 × 30	130	560	0.88	30	35	4	200	175	ISOPLUS247™
DPG60C200HB	200	2 × 30	135	360	1.06	30	35	3	200	175	TO-247AD
DPG60C200QB		2 × 30	135	360	1.06	30	35	3	200	175	TO-3P
DPF80C200HB	200	2 × 40	140	560	0.95	40	35	4	200	175	TO-247AD
DPF100C1200HB	1200	2 × 50	125	400	4.41	50	60	18	400	175	TO-247AD
DPF120C600HB	600	60	95	500	1.30	50	40	20	800	175	TO-247AD
DPF60I200HA	200	60	135	650	0.98	60	35	4	200	175	TO-247AD
DPF240X200NA		2 × 120	120	1800	0.90	120	35	4	200	175	SOT-227B (miniBLOC)
DPG10I300PA	300	10	145	140	0.98	10	35	3	200	175	TO-220AC
DPG10IM300UC		10	150	140	0.98	10	35	3	200	175	TO-252AA
DPG20C300PB	300	2 × 10	145	140	0.98	10	35	3	200	175	TO-220AB
DPG20C300PN		2 × 10	125	140	0.98	10	35	3	200	175	TO-220ABFP
DPG15I300PA	300	15	140	240	1.01	15	35	3	200	175	TO-220AC
DPG30C300PB		2 × 15	140	240	1.01	15	35	3	200	175	TO-220AB
DPG30C300PC	300	2 × 15	140	240	1.01	15	35	3	200	175	TO-263AB
DPG30C300HB		2 × 15	140	240	1.00	15	35	3	200	175	TO-247AD
DPF30I300PA	300	30	145	390	0.98	30	55	6	200	175	TO-220AC
DPG30I300HA		30	135	360	1.06	30	35	3	200	175	TO-247AD
DPG30I300PA	300	30	140	360	1.08	30	35	3	200	175	TO-220AC
DPG30IM300PC		30	140	360	1.08	30	35	3	200	175	TO-263AB
DPG30P300PJ	2 × 300	30	135	450	0.99	30	35	3	200	175	ISOPLUS220™
DPF60C300HB	300	2 × 30	140	400	0.97	30	55	6	200	175	TO-247AD
DPG60C300HB		2 × 30	135	360	1.06	30	35	3	200	175	TO-247AD
DPG60C300HJ	300	2 × 30	135	450	0.96	30	35	3	200	175	ISOPLUS247™
DPG60C300PC		2 × 30	140	360	1.08	30	35	3	200	175	TO-263AB
DPG60C300QB	300	2 × 30	135	360	1.06	30	35	3	200	175	TO-3P
DPG80C300HB	300	2 × 40	135	450	1.07	40	35	3	200	175	TO-247AD
DPG60I300HA		60	125	450	1.10	60	35	3.5	200	175	TO-247AD

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

HiPerFRED 2™ Diodes

Part Number	V_{RRM}	I_{FAV} $d = 0.5$	$@ T_C$	I_{FSM} 10 ms 45 °C	V_F	$@ I_F$	t_{rr}	I_{RM}	$-di/dt$	T_{VJM}	R_{thJC}	Package
	V	A	°C	A	$T_{VJ} = 150\text{ °C}$	°C	ns	A	A/μs	°C	K/W	
DPG60IM300PC	300	60	135	450	1.14	60	35	3.5	200	175	0.45	TO-263AB
DPG120C300QB		2 × 60	125	450	1.10	60	35	3.5	200	175	0.55	TO-3P
DPG10I400PA	400	10	145	150	1.03	10	45	4	200	175	2.30	TO-220AC
DPG10I400PM		10	120	150	1.03	10	45	4	200	175	4.40	TO-220ACFP
DPG10P400PJ	2 × 400	10	145	130	1.03	10	45	4	200	175	2.50	ISOPLUS220™
DPG20C400PB	400	2 × 10	145	150	1.03	10	45	4	200	175	2.30	TO-220AB
DPG20C400PC		2 × 10	145	150	1.03	10	45	4	200	175	2.30	TO-263AB
DPG20C400PN	400	2 × 10	120	150	1.03	10	45	4	200	175	4.40	TO-220ABFP
DPG15I400PM		15	90	190	1.14	15	45	4	200	175	4.20	TO-220ACFP
DPG30C400PB		2 × 15	140	190	1.14	15	45	4	200	175	1.70	TO-220AB
DPG30C400HB		2 × 15	140	190	1.13	15	45	4	200	175	1.70	TO-247AD
DPG30I400HA	400	30	135	360	1.13	30	45	4	200	175	0.95	TO-247AD
DPG30IM400PC		30	145	300	1.16	30	45	4	200	175	0.85	TO-263AB
DPG30P400PJ	2 × 400	10	135	400	1.05	30	45	4	200	175	1.05	ISOPLUS220™
DPG60C400HB	400	2 × 30	135	360	1.13	30	45	4	200	175	0.95	TO-247AD
DPG60C400QB		2 × 30	135	360	1.13	30	45	4	200	175	0.95	TO-3P
DPG80C400HB	400	2 × 40	135	400	1.14	40	45	4	200	175	0.70	TO-247AD
DPG60I400HA		60	120	450	1.22	60	45	4	200	175	0.55	TO-247AD
DPF60IM400HB		60	130	600	1.09	60	60	6	200	175	0.55	TO-247AD
DPG60IM400QB	400	60	120	450	1.22	60	45	4	200	175	0.55	TO-3P
DPF240X400NA		2 × 120	120	1100	0.95	120	60	6	200	175	0.45	SOT-227B (miniBLOC)
DPH30IS600HI	600	30	140	450	1.89	30	35	3	200	175	0.55	ISOPLUS247™

HiPerFRED™ Diodes



DSEP... / DP...I...

DSEC...

DSEP 2x...0...

DSEP 2x...1...

DSEC

Part Number	V _{RRM}	I _{FAV}	@ T _C	I _{FSM}	V _F	@ I _F	t _{rr}	I _{RM}	-di/dt typ.	T _{VJM}	R _{thJC}	Package
		d = 0.5		10 ms 45 °C	T _{VJ} = 150 °C		typ. T _{VJ} = 25 °C					
		A	°C		V	°C	ns	A	A/μs			
DSEP40-03AS	300	40	125	340	1.18	40	35	3.5	200	175	0.85	TO-263AB
DSEP6-06AS	600	6	150	40	1.34	6	20	3.5	100	175	2.80	TO-252AA
DSEP8-06A	600	10	145	50	1.42	10	35	3.5	100	175	2.50	TO-220AC
DSEP8-06B		10	130	50	1.85	10	30	2.0	100	175	2.50	TO-220AC
DSEP15-06A	600	15	140	110	1.35	15	35	4.0	100	175	1.60	TO-220AC
DSEP15-06AS		15	140	110	1.35	15	35	4.0	100	175	1.60	TO-263AB
DSEP15-06B	600	15	130	110	1.59	15	25	2.0	100	175	1.60	TO-220AC
DSEP15-06BS		15	130	110	1.59	15	25	2.0	100	175	1.60	TO-263AB
DSEP29-06A	600	30	135	250	1.26	30	35	5.5	100	175	0.90	TO-220AC
DSEP29-06AS		30	135	250	1.26	30	35	5.5	100	175	0.90	TO-263AB
DSEP29-06B	600	30	120	250	1.63	30	30	3.0	100	175	0.90	TO-220AC
DPG30I600PM		15	95	250	1.63	30	25	4.5	200	175	3.50	TO-220ACFP
DSEP30-06A	600	30	135	250	1.25	30	35	5.5	100	175	0.90	TO-247AD
DSEP30-06B		30	120	250	1.61	30	30	3.0	100	175	0.90	TO-247AD
DSEP30-06BR	600	30	100	250	1.61	30	30	3.0	100	175	1.10	ISOPLUS247™
DSEP60-06A		60	110	600	1.39	60	35	5.5	100	175	0.65	TO-247AD
DSEP60-06AT	600	60	110	600	1.39	60	35	5.5	100	175	0.65	TO-268AA
DSEP75-06AR		75	115	1000	1.38	75	35	6.5	200	175	0.50	ISOPLUS247™
DSEP8-12A	1200	10	130	40	1.96	10	40	4.0	100	175	2.50	TO-220AC
DSEP12-12A		15	130	90	1.87	15	40	4.5	100	175	1.60	TO-220AC
DSEP12-12AZ	1200	15	130	90	1.87	15	40	4.5	100	175	1.60	TO-263ABHV
DSEP12-12B		15	130	90	2.06	15	35	3.0	100	175	1.60	TO-220AC
DSEP12-12BZ	1200	15	130	90	2.06	15	35	3.0	100	175	1.60	TO-263ABHV
DSEP29-12A		30	120	200	1.81	30	40	8.5	100	175	0.90	TO-220AC
DSEP29-12B	1200	30	100	200	2.31	30	35	5.0	100	175	0.90	TO-220AC
DSEP30-12A		30	115	200	1.79	30	40	8.5	100	175	0.90	TO-247AD
DSEP30-12B	1200	30	100	200	2.30	30	35	5.0	100	175	0.90	TO-247AD
DSEP30-12AR		30	100	200	1.79	30	40	8.5	100	175	1.10	ISOPLUS247™
DSEP60-12A	1200	60	85	500	1.81	60	40	8.5	100	175	0.65	TO-247AD
DSEP60-12B		60	110	500	2.20	60	35	-	100	175	0.45	TO-247AD
DSEP60-12AR	1200	60	60	500	1.81	60	40	8.5	100	175	0.80	ISOPLUS247™
DSEP60-12AZ		60	115	500	1.81	60	40	8.5	100	175	0.45	TO-268AA
DSEP90-12AZ	600	90	105	800	1.79	90	40	8.5	100	175	0.35	TO-268AA
DSEC16-06A		2 × 10	145	50	1.42	10	35	3.5	100	175	2.50	TO-220AB
DSEC16-06AC	600	2 × 8	85	50	1.20	10	35	3.5	100	175	3.00	ISOPLUS220™
DSEC29-06AC		2 × 15	140	110	1.34	15	35	4.0	100	175	1.60	ISOPLUS220™
DSEC30-06A	600	2 × 15	140	110	1.34	15	35	4.0	100	175	1.60	TO-247AD
DSEC30-06B		2 × 15	130	110	1.58	15	25	2.0	100	175	1.60	TO-247AD
DSEC59-06BC	600	2 × 30	105	200	1.56	30	30	4.0	100	175	1.10	ISOPLUS220™
DSEC60-06A		2 × 30	135	250	1.25	30	35	5.5	100	175	0.90	TO-247AD
DSEC60-06B	1200	2 × 30	120	250	1.61	30	30	3.0	100	175	0.90	TO-247AD
DSEC16-12A		2 × 10	130	40	1.96	10	40	4.0	100	175	2.50	TO-220AB
DSEC16-12AS	1200	2 × 10	130	40	1.96	10	40	4.0	100	175	2.50	TO-263AB
DSEC30-12A		2 × 15	115	90	1.86	15	40	4.5	100	175	1.60	TO-247AD
DSEC60-12A	300	2 × 30	115	200	1.79	30	40	8.5	100	175	0.90	TO-247AD
DSEC120-12AK		2 × 60	85	500	1.81	60	40	7.0	100	175	0.65	TO-264
DSEP2X31-03A	600	2 × 30	110	300	0.90	30	30	4.5	100	150	1.15	SOT-227B (miniBLOC)
DSEP2X61-03A		2 × 60	75	600	1.26	60	30	4.0	100	150	0.85	SOT-227B (miniBLOC)
DSEP2X91-03A	1200	2 × 90	70	1000	1.10	90	30	4.5	100	150	0.60	SOT-227B (miniBLOC)
DSEP2X31-06A		2 × 30	95	250	1.23	30	35	5.5	100	150	1.15	SOT-227B (miniBLOC)
DSEP2X31-06B	600	2 × 30	75	250	1.59	30	30	3.0	100	150	1.15	SOT-227B (miniBLOC)
DSEP2X61-06A		2 × 60	65	600	1.48	60	35	5.5	100	150	0.85	SOT-227B (miniBLOC)
DSEP2X91-06A	1200	2 × 90	55	1000	1.39	90	35	8.0	100	150	0.60	SOT-227B (miniBLOC)
DSEP2X31-12A		2 × 30	70	200	1.77	30	40	8.5	100	150	1.15	SOT-227B (miniBLOC)
DSEP2X60-12A	400	2 × 60	80	800	1.52	60	40	8.0	100	150	0.60	SOT-227B (miniBLOC)
DSEP2X61-12A		2 × 60	80	800	1.52	60	40	8.0	100	150	0.60	SOT-227B (miniBLOC)
DSEP2X101-04A	400	2 × 100	45	1000	1.22	125	30	5.5	100	150	0.60	SOT-227B (miniBLOC)

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.


HiPerFRED™ Diodes

1


Part Number	V_{RRM}	I_{FAV}	@ T_C	I_{FSM}	V_F	@ I_F	t_{rr}	I_{RM}	-di/dt typ.	T_{VJM}	R_{thJC}	Package
		$d = 0.5$		10 ms 45 °C	$T_{VJ} = 150\text{ °C}$		typ. $T_{VJ} = 25\text{ °C}$					
	V	A	°C		V	°C	ns	A	A/μs	°C	K/W	
DPT15I600PA	600	15	120	150	1.75	15	26	-	200	150	0.86	TO-220AC
DPS30I600HA	600	30	130	450	1.25	30	38	-	200	150	0.45	TO-247AD
DPU60I600HA	600	60	130	650	1.35	60	38	-	200	150	0.24	TO-247AD
DPU30I1200PA	1200	30	120	250	1.9	30	39	-	200	150	0.44	TO-220AC
DPU60I1200HA	1200	60	110	600	1.8	60	45	-	200	150	0.29	TO-247AD
DPS120I1200HA	1200	120	85	1000	2.1	120	54	-	200	150	0.25	TO-247AD
DPS60C600HB	600	2 × 30	130	450	1.25	30	38	-	200	150	0.45	TO-247AD

SONIC-FRD™ Diodes


- Ultrasoft and fast recovery
- Very low temperature dependence




DH 2x...0-...




DHH



DHG... IM...



DHG... I...



DHG... X...

Part Number	V_{RRM}	I_{FAV}	@ T_C	I_{FSM}	V_F	@ I_F	t_{rr}	I_{RM} typ.	-di/dt typ.	T_{VJM}	R_{thJC}	Package
		$d = 0.5$		10 ms 45 °C	$T_{VJ} = 150\text{ °C}$		typ. $T_{VJ} = 25\text{ °C}$					
	V	A	°C		V	°C	ns	A	A/μs	°C	K/W	
DHG5I600PA	600	5	105	40	2.17	5	35	2	100	150	3.15	TO-220AC
DHG5I600PM		5	85	40	2.17	5		2	100		4.20	TO-220ACFP
DHG10C600PB	600	2 × 5	105	40	2.17	5	35	2	100	150	3.15	TO-220AB
DHG30I600PA	600	30	95	200	2.24	30	35	12	600	150	0.60	TO-220AC
DHG30IM600PC		30	95	200	2.22	30		12	600		0.60	TO-263AB
DHG30I600HA	600	30	85	200	2.21	30	35	12	600	150	0.70	TO-247AD
DHG60C600HB		2 × 30	85	200	2.21	30		12	600		0.70	TO-247AD
DHG60I600HA		60	95	430	2.10	60		24	1200		0.30	TO-247AD
DHG50X650NA	650	2 × 25	70	200	2.03	25	35	12	600	150	1.20	SOT-227B (miniBLOC)
DHG100X650NA		2 × 50	80	430	2.00	50		20	1200		0.60	SOT-227B (miniBLOC)
DHG10I1200PA	1200	10	95	65	2.13	10	75	8	350	150	1.80	TO-220AC
DHG10I1200PM		10	30	65	2.13	10		8	350		4.00	TO-220ACFP
DHG20C1200PB	1200	2 × 10	95	65	2.13	10	75	8	350	150	1.80	TO-220AB
DHG20I1200PA		20	105	135	2.16	20		19	750		0.80	TO-220AC
DHG20I1200HA	1200	20	95	135	2.14	20	75	19	750	150	0.90	TO-247AD
DHG40C1200HB		2 × 20	95	135	2.14	20		19	750		0.90	TO-247AD
DHG50X1200NA	1200	2 × 25	70	180	2.00	25	75	25	1000	150	1.20	SOT-227B (miniBLOC)
DHG30I1200HA		30	90	180	2.16	30		25	1000		0.70	TO-247AD
DHG100X1200NA	1200	2 × 50	65	430	2.05	50	75	50	2500	150	0.60	SOT-227B (miniBLOC)
DHG60I1200HA		60	95	430	2.22	60		50	2500		0.30	TO-247AD
DHG10I1800PA	1800	10	85	65	2.30	10	300	8	200	150	2.15	TO-220AC
DHG10IM1800UZ		10	100	60	2.33	10		13	250		1.50	TO252AA
DH20-18A	1800	20	95	150	2.35	20	300	22	400	150	0.90	TO-247AD
DH40-18A		40	100	400	2.08	40		50	750		0.45	TO-247AD
DH60-14A	1400	60	100	700	2.03	60	230	60	800	150	0.30	TO-247AD
DH60-16A	1600											TO-247AD
DH60-18A	1800											TO-247AD
DHH55-36N1F	2 × 1800	60	50	700	2.03	60	230	60	800	150	0.60	ISOPLUS i4-PAC™
DH2X60-18A	1800	2 × 60	55	700	2.02	60	230	60	800	150	0.60	SOT-227B (miniBLOC)
DH2X61-18A		2 × 60	55	700	2.02	60		60	800		0.60	SOT-227B (miniBLOC)
DHG55I3300FE	3300	50	80	600	3.40	60	1650	55	500	150	0.45	ISOPLUS i4-PAC™
DHG40I4500KO	4500	43	80	600	3.50	50	1450	80	800	150	0.50	ISOPLUS264

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

Diodes



X005b
TO-220AC



X007b
TO-220ABCP



X011b
TO-263AB



X011c
TO-263ABHV



X014a
TO-247AD



X014b
TO-247AD



X016a
ISOPLUS247™



X016b
ISOPLUS247™



X019a
TO-268HV



X027a
SOT-227B (miniBLOC)




X101
ECO-PAC 1




X102
ECO-PAC 2

FRED Diodes

Fast Recovery Epitaxial Diodes



DSEI... / DFE




DSEK

Part Number	V _{RRM}	I _{FAV} d = 0.5	@ T _C	I _{FRMS}	I _{FSM} 10 ms 45 °C	V _F T _{VJ} = 150 °C	@ I _F	t _{rr} typ. T _{VJ} = 25 °C	I _{RM} typ. T _{VJ} = 100 °C	-di/dt	R _{thJC}	Package
	V	A	°C	A	A	V	A	ns	A	A/μs	K/W	
DSEI8-06A	600	8	115	16	100	1.30	8	35	2.5	64	2.50	TO-220AC
DSEI8-06AS	600	8	115	16	100	1.30	8	35	2.5	64	2.50	TO-263AB
DFE10I600PM	600	10	100	16	100	1.30	10	35	2.5	64	4.20	TO-220ACFP
DSEI12-06A	600	14	100	25	100	1.50	16	35	4.0	100	2.00	TO-220AC
DSEI12-06AS	600	14	100	25	100	1.50	16	35	4.0	100	2.00	TO-263AB
DSEI12-10A	1000	12	100	25	75	2.10	12	50	6.5	100	1.60	TO-220AC
DSEI12-12A	1200	11	100	25	75	2.20	12	50	6.5	100	1.60	TO-220AC
DSEI12-12AZ	1200	11	100	25	75	2.20	12	50	6.5	100	1.60	TO-263ABHV
DSEI20-12A	1200	17	85	70	130	1.87	12	40	7.0	100	1.60	TO-220AC
DSEI25-06A	600	25	110	35	240	1.55	25	35	9.0	200	1.20	TO-220AC
DSEI19-06AS	600	20	65	25	100	1.50	16	35	4.0	100	2.00	TO-263AB
DSEI25-06AS	600	25	110	35	240	1.55	25	35	9.0	200	1.20	TO-263AB
DSEI36-06AS	600	37	85	70	300	1.40	37	35	10.0	240	1.00	TO-263AB
DFE25I600HA	600	25	110	70	240	1.52	25	35	9.0	200	1.20	TO-247AD
DSEI30-06A	600	37	85	70	300	1.40	37	35	10.0	240	1.00	TO-247AD
DSEI30-10A	1000	30	85	70	200	2.00	36	35	16.0	240	0.90	TO-247AD
DSEI30-10AR	1000	30	85	70	200	2.00	36	35	16.0	240	0.90	ISOPLUS247™
DSEI30-12A	1200	26	85	70	200	2.20	30	40	16.0	240	0.90	TO-247AD
DSEK60-02A	200	2 × 34	115	50	325	0.85	30	35	4.0	100	1.00	TO-247AD
DSEK60-02AR	200	2 × 34	115	50	325	0.85	30	35	4.0	100	1.00	ISOPLUS247™
DSEK60-06A	600	2 × 30	85	50	300	1.40	37	35	10.0	240	1.00	TO-247AD
DSEK60-12A	1200	2 × 26	85	50	200	2.20	30	40	16.0	240	0.90	TO-247AD
DSEI60-02A	200	69	85	98	600	0.88	60	35	8.0	200	0.75	TO-247AD
DSEI60-06A	600	60	70	100	550	1.50	70	35	19.0	480	0.75	TO-247AD
DSEI60-10A	1000	60	60	100	500	1.80	60	35	32.0	480	0.66	TO-247AD


Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

FRED Diodes


Fast Recovery Epitaxial Diodes




DSEK



DSEI... 2x... 0-...



DSEI... 2x... 1-...




2x... 1-...


Part Number	V _{RRM}	I _{FAV} d = 0.5	@ T _C	I _{FRMS}	I _{FSM} 10 ms 45 °C	V _F T _{VJ} = 150 °C	@ I _F	t _{rr} typ. T _{VJ} = 25 °C	I _{RM} typ. T _{VJ} = 100 °C	-di/dt	R _{thJC}	Package
	V	A	°C	A	A	V	A	ns	A	A/μs	K/W	
DSEI60-12A	1200	52	60	100	500	2.00	60	40	32	480	0.66	TO-247AD
DSEI120-06A	600	126	70	100	600	1.12	70	35	17	200	0.35	TO-247AD
DSEI120-12A	1200	109	60	100	600	1.55	70	40	25	200	0.35	TO-247AD
DSEI120-12AZ	1200	109	60	100	600	1.55	70	40	25	200	0.35	TO-268HV
DSEI2x30-04C	400	2 × 30	85	70	300	1.40	30	35	10	240	1.25	SOT-227B (miniBLOC)
DSEI2x30-06C	600	2 × 30	85	70	300	1.40	30	35	10	240	1.25	SOT-227B (miniBLOC)
DSEI2x30-10B	1000	2 × 30	50	70	200	2.00	30	35	16	240	1.25	SOT-227B (miniBLOC)
DSEI2x30-12B	1200	2 × 28	50	70	200	2.20	30	40	16	240	1.25	SOT-227B (miniBLOC)
DSEI2x31-04C	400	2 × 30	85	70	300	1.40	30	35	10	240	1.25	SOT-227B (miniBLOC)
DSEI2x31-06C	600	2 × 30	85	70	300	1.40	30	35	10	240	1.25	SOT-227B (miniBLOC)
DSEI2x31-10B	1000	2 × 30	50	70	200	2.00	30	35	16	240	1.25	SOT-227B (miniBLOC)
DSEI2x31-12B	1200	2 × 28	50	70	200	2.20	30	40	16	240	1.25	SOT-227B (miniBLOC)
DSEI2x61-02A	200	2 × 71	85	100	950	0.88	60	35	8	200	0.80	SOT-227B (miniBLOC)
DSEI2x60-04C	400	2 × 60	70	100	550	1.50	60	35	19	480	0.70	SOT-227B (miniBLOC)
DSEI2x61-04C	400	2 × 60	70	100	550	1.50	60	35	19	480	0.70	SOT-227B (miniBLOC)
DSEI2x61-06C	600	2 × 60	70	100	550	1.50	60	35	19	480	0.70	SOT-227B (miniBLOC)
DSEI2x61-10B	1000	2 × 60	50	100	500	1.80	60	35	32	480	0.70	SOT-227B (miniBLOC)
DSEI2x61-12B	1200	2 × 52	50	100	450	2.15	60	40	32	480	0.70	SOT-227B (miniBLOC)
DSEI2x61-06P	600	2 × 60	70	100	550	1.50	60	35	19	480	0.70	ECO-PAC 1
DSEI2x61-12P	1200	2 × 52	50	100	450	2.15	60	40	32	540	0.70	ECO-PAC 1
DSEI2x121-02A	200	2 × 123	70	150	1200	0.95	120	35	12	200	0.50	SOT-227B (miniBLOC)
DSEI2x101-06A	600	2 × 96	70	150	1200	1.17	100	35	19	200	0.50	SOT-227B (miniBLOC)
DFE240X600NA	600	2 × 120	80	150	1200	1.20	120	35	27	600	0.40	SOT-227B (miniBLOC)
DFE250X600NA	600	2 × 125	80	150	1300	1.16	125	35	27	600	0.40	SOT-227B (miniBLOC)
DSEI2x101-12A	1200	2 × 91	50	130	900	1.61	100	40	24	200	0.50	SOT-227B (miniBLOC)
DSEI2x101-06P	600	2 × 96	70	150	1200	1.17	100	40	19	200	0.50	ECO-PAC 2
DSEI2x101-12P	1200	2 × 91	50	130	900	1.61	100	40	24	200	0.50	ECO-PAC 2
DSEI2x161-02P	200	2 × 165	70	270	1200	1.05	200	35	20	200	0.29	ECO-PAC 2
DSEI2x161-06P	600	2 × 147	70	270	1200	1.40	200	35	45	200	0.29	ECO-PAC 2
DSEI2x161-12P	1200	2 × 128	70	270	1200	1.75	200	40	48	200	0.29	ECO-PAC 2

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

Diodes



X005a
TO-220AB



X014b
TO-247AD




X027a
SOT-227B (miniBLOC)



X126d
Y4




X011c
TO-263ABHV




X016c
ISO247™



X125e
TO-240



X014a
TO-247AD



X019
TO-268AA



X126c
Y4


FRED & HiPerFRED™ Modules

Part Number	V _{RRM}	I _{FAV}	@ T _C	I _{FRMS}	I _{FSM} 10 ms 45 °C	V _F	@ I _F	t _{rr} typ.	I _{RM} typ.	-di/dt	R _{thJC}	P _{tot}	Package
		d = 0.5				T _{VJ} = 125 °C		T _{VJ} = 25 °C		T _{VJ} = 100° C			
	V	A	°C	A	A	V	A	ns	A	A/μs	K/W	W	
FRED													
MEO550-02DA	200	582	75	822	4800	1.08	520	150	15	200	0.071	1750	Y4
MEO500-06DA	600	514		726		1.41		250	132	800			
MEO450-12DA	1200	453		640		1.76		450	165	800			
MEK75-12DA	1200	2 × 75	75	107	1200	1.85	100	250	33	200	0.45	280	TO-240
MEA75-12DA	1200	2 × 75											
MEE75-12DA	2 × 1200	75											
MEK95-06DA	600	2 × 95	75	142	1200	1.36	100	250	21	200	0.45	280	TO-240
MEA95-06DA	600	2 × 95											
MEE95-06DA	2 × 600	95											
MEK250-12DA	1200	2 × 260	75	367	2400	1.54	260	450	83	400	0.143	875	Y4
MEA250-12DA	1200	2 × 260											
MEE250-12DA	2 × 1200	260											
MEK300-06DA	600	2 × 304	75	430	2400	1.19	260	250	66	400	0.143	875	Y4
MEA300-06DA	600	2 × 304											
MEE300-06DA	2 × 600	304											
MEK350-02DA	200	2 × 356	75	503	2400	0.92	260	150	15	200	0.143	875	Y4
HiPerFRED™													
MEK150-04DA	400	2 × 150	100	200	1200	1.401	300	300	11	100	0.350	360	TO-240
MEK600-04DA	400	2 × 575	80	800	3000	1.1	400	220	80	900	0.110	1100	Y4
MPK95-06DA	600	2 × 95	110	200	1200	1.4	100	35	5.5	100	0.575	215	TO-240


1 $T_{VJM} = 150\text{ °C}$

Diode connections for Fig. X125 (TO-240)


Diode connections for Fig. X126 (Y4: 34 mm package)




MEE




MEA




MEK/MPK




MEO



MEK



MEA




DSDI...

SemiFast Diodes

Part Number	V _{RRM}	I _{FAV}	@ T _C	I _{FRMS}	I _{FSM} 10 ms 45 °C	V _F	@ I _F	t _{rr} typ.	I _{RM} typ.	-di/dt	R _{thJC}	Package
		d = 0.5				T _{VJ} = 125 °C		T _{VJ} = 25 °C		T _{VJ} = 100 °C		
	V	A	°C	A	A	V	A	ns	A	A/μs	K/W	
DSDI60-14A	1400	63	60	100	500	4.1	70	300	60	500	0.4	TO-247AD
DSDI60-16A	1600	63	60	100	500	4.1	70	300	60	500	0.4	TO-247AD
DSDI60-18A	1800	63	60	100	500	4.1	70	300	60	500	0.4	TO-247AD

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

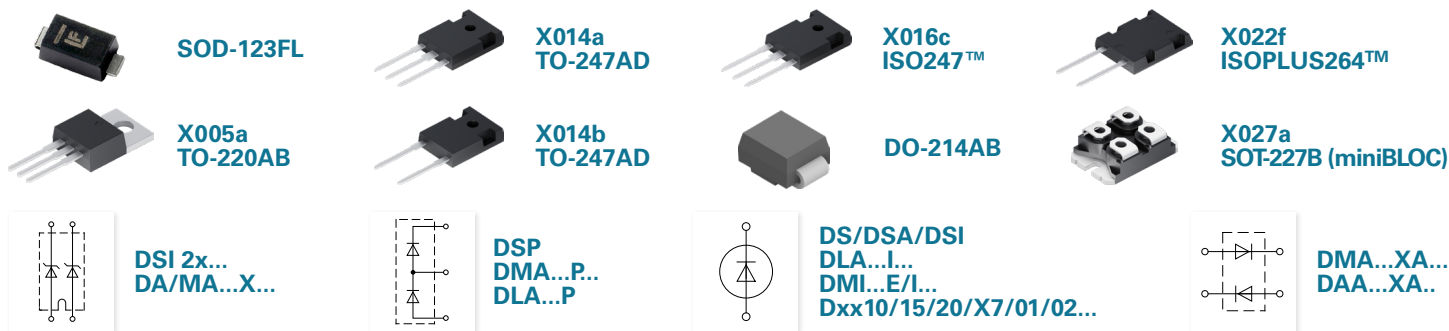

Rectifier Diodes


Part Number	V _{RRM}	I _{FAV}	@ T _C	P _{RSM}	I _{FRMS}	I _{FSM} 10 ms 45 °C	V ₁₀	r _F	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	kW	A	A	V	mΩ	°C	K/W	K/W	
DMA50I800HA	800	50	130	–	70	500	0.81	8.6	175	0.45	0.25	TO-247AD
DMA50I1200HA	1200											
DMA50I1600HA	1600											
DMA50P1200HR	2 × 1200	50	130	–	70	500	0.81	8.6	175	0.45	0.25	TO-247AD
DMA50P1200HB	2 × 1200											
DMA50P1600HB	2 × 1600											
DLA60I1200HA	1200	60	150	–	70	850	0.77	4.2	175	0.30	0.25	TO-247AD
DMA80I1600HA	1600											
DMA80IM1600HB	1600											
DSI2x55-12A	1200	2 × 60	95	–	120	800	0.83	6.2	150	0.60	0.10	SOT-227B (miniBLOC)
DSI2x55-16A	1600											
DNA120E2200KO	2200	120	125	–	70	2000	0.75	3.8	175	0.25	0.15	ISOPLUS264™
DMA150E1600NA	1600	150	90	–	150	3000	0.83	2.0	150	0.25	0.10	SOT-227B (miniBLOC)
DMA200X1600NA	1600	2x100	100	–	150	1500	0.8	4.0	150	0.30	0.10	SOT-227B (miniBLOC)
DMA200XA1600NA												
DAA200X1800NA	1800	2x100	100	20	150	1500	0.8	4.0	150	0.30	0.10	SOT-227B (miniBLOC)
DAA200XA1800NA												

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.


Rectifier Diodes

Part Number	V _{RRM}	I _{FAV} d = 0.5		I _{FRMS}	V _F @ I _F T _{VJ} = 25 °C		I _{FSM} 10 ms, 25 °C	T _{VJM}	R _{thJC}	Package
	V	A	°C	A	V	A	A	°C	K/W	
D4015LTP	400	9.5	90	15	1.6	30	188	125	2.60	TO-220AB
D4020LTP		12.7	80	20	1.6	40	255	125	2.55	TO-220AB
D4025LTP		15.9	80	25	1.6	50	300	125	2.50	TO-220AB
D60X7S4ARP	600	0.7	135	–	1.1	0.7	21	150	20	SOD-123FL
D6001S4ARP		1	127	–	1.1	1	25	150	20	SOD-123FL
D6002S4ARP		2	107	–	1.1	2	42	150	20	SOD-123FL
D6015LTP		9.5	90	15	1.6	30	188	125	2.60	TO-220AB
D6020LTP		12.7	80	20	1.6	40	255	125	2.55	TO-220AB
D6025LTP		15.9	80	25	1.6	50	300	125	2.50	TO-220AB
D8015LTP	800	9.5	90	15	1.6	30	188	125	2.60	TO-220AB
D8020LTP		12.7	80	20	1.6	40	255	125	2.55	TO-220AB
D8025LTP		15.9	80	25	1.6	50	300	125	2.50	TO-220AB
DK010S3ARP	1000	10	80	–	1.2	10	265	150	9.00	DO-214AB
DK015LTP		9.5	90	15	1.6	30	188	125	2.60	TO-220AB
DK020LTP		12.7	80	20	1.6	40	255	125	2.55	TO-220AB
DK025LTP		15.9	80	25	1.6	50	300	125	2.50	TO-220AB


Diodes




DLA...IM...
DMA...IM...




DNA...EM...
DAA...EM...




DSP
DMA...P..
DLA...P




DSP
DMA...P..
DLA...P




DS/DSA/DSI
DMA... E/I...
DLA...I...



DSIK...



DSI 2x...
DA/MA...X...
DMA...XA...



DMA...XA...
DAA...XA...

Rectifier Diodes

Part Number	V _{RRM}	I _{FAV}	@ T _C	P _{RSM}	I _{FRMS}	I _{FSM} 10 ms 45 °C	V ₁₀	r _F	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	kW	A	A	V	mΩ	°C	K/W	K/W	
DSA1-12D	1200	2.3	45	1.6	7	110	0.80	67	150	80.00	–	FP-Case
DSA1-16D	1600											
DSA1-18D	1800											
DLA5P800UC	2 × 800	5	140	–	20	40	0.74	44	175	5.50	0.50	TO-252AA
DSP8-08S	2 × 800	8	160	–	25	100	0.79	33	175	1.50	0.25	TO-263AB
DSP8-12S	2 × 1200											
DSP8-08A	2 × 800											
DSP8-12A	2 × 1200	8	160	–	25	100	0.79	33	175	1.50	0.25	TO-220AB
DSP8-08AS	2 × 800											
DSP8-12AS	2 × 1200											
DLA10IM800UC	800	10	100	–	20	80	0.80	22	175	3.15	0.50	TO-252AA
DLA20IM800PC	800	20	100	–	35	200	0.80	19	175	1.80	0.25	TO-263AB
DMA10IM1200UZ	1200	10	150	–	20	120	0.82	37	175	1.50	0.50	TO-252
DMA10IM1600UZ	1600											
DMA10P1200UZ	1200	10	140	–	20	100	0.90	37	175	2.00	0.50	TO-252
DMA10P1600UZ	1600											
DMA10I1600PA	1600	10	150	–	20	120	0.82	37	175	1.50	0.50	TO-220AC
DMA10IM1600PZ	1600	10	150	–	20	120	0.82	37	175	1.50	0.25	TO-263ABHV
DMA10P1600PZ	2 × 1600											
DMA10P1800PZ	2 × 1800											
DAA10EM1800PZ	1800	10	150	1.6	25	150	0.81	32	175	1.50	0.25	TO-263ABHV
DAA10P1800PZ	2 × 1800	10	150	1.6	25	150	0.82	37	175	1.50	0.25	

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

Rectifier Diodes

Part Number	V _{RRM}	I _{FAV}	@ T _C	P _{RSM}	I _{FRMS}	I _{FSM} 10 ms 45 °C	V ₁₀	r _F	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	kW	A	A	V	mΩ	°C	K/W	K/W	
DMA10P1200HR	2 × 1200	10	145	–	25	120	0.81	34	175	2.00	0.25	ISO247™
DMA10P1600HR	2 × 1600											
DSP25-12A	2 × 1200	25	135	–	70	300	0.81	13.8	175	0.90	0.25	TO-247AD
DSP25-16A	2 × 1600											
DSP25-12AT	2 × 1200	25	135	–	70	300	0.81	13.8	175	0.90	0.15	TO-268AA
DSP25-16AT	2 × 1600											
DSP25-16AR	2 × 1600	25	110	–	70	300	0.81	13.8	175	1.50	0.25	ISOPLUS247™
DSI30-08A	800	30	130	–	35	300	0.82	14.9	175	0.90	0.50	TO-220AC
DSI30-12A	1200											
DSI30-16A	1600											
DSI30-08AS	800	30	130	–	35	300	0.82	14.9	175	0.90	0.25	TO-263AB
DSI30-12AS	1200											
DSI30-16AS	1600											
DMA30IM1600PZ	1600	30	140	–	35	300	0.82	14.1	175	0.70	0.25	TO-263ABHV
DMA30E1800HA	1800	30	140	–	70	370	0.88	12.1	175	0.70	0.25	TO-247AD
DMA30P1200HB	2 × 1200	30	130	–	70	370	0.81	12.7	175	0.80	0.25	TO-247AD
DMA30P1600HB	2 × 1600											
DMA30P1600HR	2 × 1600	30	105	–	50	300	0.82	13.5	175	1.30	0.25	ISO247™
DNA30ER2200IY	2200	30	140	–	35	370	0.88	12.9	175	0.70	0.50	TO-262AA (I2-PAK)
DNA30E2200PA												TO-220AC
DNA30E2200PZ	2200	30	140	–	35	370	0.88	12.9	175	0.70	0.25	TO-263ABHV
DNA30EM2200PZ												
DNA30E2200FE	2200	30	100	–	70	370	0.88	12.2	175	1.35	0.20	ISOPLUS i4-PAC™
DLA40IM800PC	800	40	130	–	35	300	0.81	8	175	0.80	0.25	TO-263AB
DSI45-08A	800	45	130	–	70	480	0.81	9.1	175	0.55	0.25	TO-247AD
DSI45-12A	1200	45	130	–	70	480	0.81	9.1	175	0.55	0.25	TO-247AD
DSI45-16A	1600											
DSP45-12A	2 × 1200	45	130	–	70	480	0.81	9.1	175	0.55	0.25	TO-247AD
DSP45-12AZ											0.15	TO-268HV
DSP45-16A	2 × 1600	45	130	–	70	480	0.81	9.1	175	0.55	0.25	TO-247AD
DSP45-16AZ											0.15	TO-268HV
DSP45-18A	2 × 1800	45	130	–	70	480	0.81	9.1	175	0.55	0.25	TO-247AD
DSI45-16AR	1600	45	100	–	70	480	0.81	9.1	175	0.90	0.25	ISOPLUS247™
DSIK45-16AR	1600	2 × 45										
DSP45-16AR	2 × 1600	45										
DMA50I800HA	800											
DMA50I1200HA	1200	50	130	–	70	500	0.81	8.6	175	0.45	0.25	TO-247AD
DMA50I1600HA	1600											
DMA50P1200HR	2 × 1200	50	105	–	70	500	0.82	9.0	175	0.70	0.25	ISO247™
DMA50P1200HB	2 × 1200	50	130	–	70	500	0.81	8.6	175	0.45	0.25	TO-247AD
DMA50P1600HB	2 × 1600											
DLA60I1200HA	1200	60	150	–	70	850	0.77	4.2	175	0.30	0.25	TO-247AD
DMA80I1600HA	1600	80	125	–	70	1300	0.82	4.8	175	0.35	0.25	
DMA80IM1600HB	1600	80	125	–	70	1300	0.82	4.8	175	0.35	0.25	
DSI2x55-12A	1200	2 × 60	95	–	120	800	0.83	6.2	150	0.60	0.10	SOT-227B (miniBLOC)
DSI2x55-16A	1600											
DNA120E2200KO	2200	120	125	–	70	2000	0.75	3.8	175	0.25	0.15	ISOPLUS264™
DMA150E1600NA	1600	150	90	–	150	3000	0.83	2.0	150	0.25	0.10	SOT-227B (miniBLOC)
DMA200X1600NA	1600	2 × 100	100	–	150	1500	0.8	4.0	150	0.30	0.10	SOT-227B (miniBLOC)
DMA200XA1600NA												
DAA200X1800NA	1800	2 × 100	100	20	150	1500	0.8	4.0	150	0.30	0.10	SOT-227B (miniBLOC)
DAA200XA1800NA												


Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

Breakover Diodes


The IXBOD2 discrete series provides precise and temperature-stable breakover voltage triggering for high-voltage protection and control applications. Devices remain in the off-state under normal operating conditions and transition rapidly to a low-impedance conducting state when the specified breakover voltage is exceeded.

IXBOD2 devices are offered in FP-case (oil-proof) packages with breakover voltage ratings from 700 V to 1200 V, featuring defined surge current capability and dv/dt performance suitable for use in demanding electrical environments.


Typical applications include: over-voltage protection circuits, crowbar trigger circuits, and controlled energy discharge applications.




X0201
FP-Case (oil-proof)



X0202
BOD-Package



Version R



Version RD

Fast Break-Over Diodes FP-Case

Part Number	V _{BO}		I _{FSM}	I ² t	I _{F(AVM)}	dv/dt	Configuration	Package
	T _{VJ} = 25 °C K _T = 1·10 ⁻³ K ⁻¹		T _{VJ} = 50 °C					
	V		A	A ² s	A			
IXBOD2-07	700	±50	200	4	0.9	3000	Single	FP-Case (oil-proof)
IXBOD2-08	800	±50	200	4	0.9	3000	Single	FP-Case (oil-proof)
IXBOD2-09	900	±50	200	4	0.9	3000	Single	FP-Case (oil-proof)
IXBOD2-10	1000	±50	200	4	0.9	3000	Single	FP-Case (oil-proof)
IXBOD2-11	1100	±50	200	4	0.9	3000	Single	FP-Case (oil-proof)
IXBOD2-12	1200	±50	200	4	0.9	3000	Single	FP-Case (oil-proof)

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

Fast Break-Over Diodes BOD-Package

Part Number	V _{BO}		I _{FSM}	I ² t	I _{T(AVM)}	dv/dt	V _{RRM} / V _{RSM}	Configuration	Package
	T _{VJ} = 25 °C K _T = 1·10 ⁻³ K ⁻¹								
	V								
IXBOD2-11RD	1100	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-12RD	1200	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-14RD	1400	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-15RD	1500	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-16RD	1600	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-17RD	1700	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-18RD	1800	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-19RD	1900	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-20RD	2000	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-21RD	2100	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-22RD	2200	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-23RD	2300	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-24RD	2400	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-25RD	2500	±50	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-26RD	2600	±100	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-28RD	2800	±100	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-30RD	3000	±100	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-32RD	3200	±100	50	0.125	0.2	3000	6000	Version RD	BOD-Package
IXBOD2-36RD	3600	±100	50	0.125	0.2	3000	6000	Version RD	BOD-Package

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.


V_{BO} tolerance is ±50 V up to 2300 V and ±100 V for ≥2500 V devices.

Fast Break-Over Diodes BOD-Package

Part Number	V _{Bo}		I _{FSM}	I ² t	I _{T(AVM)}	dv/dt	Configuration	Package
	T _{VJ} = 25 °C K _T = 1·10 ⁻³ K ⁻¹							
	V			A	A ² s	A		
IXBOD2-12R	1200	±50	200	4	1.25	3000	Version R	BOD-Package
IXBOD2-14R	1400	±50	200	4	1.25	3000	Version R	BOD-Package
IXBOD2-15R	1500	±50	200	4	1.25	3000	Version R	BOD-Package
IXBOD2-16R	1600	±50	200	4	1.25	3000	Version R	BOD-Package
IXBOD2-17R	1700	±50	200	4	1.25	3000	Version R	BOD-Package
IXBOD2-18R	1800	±50	200	4	1.25	3000	Version R	BOD-Package
IXBOD2-19R	1900	±50	200	4	1.25	3000	Version R	BOD-Package
IXBOD2-20R	2000	±50	200	4	1.25	3000	Version R	BOD-Package
IXBOD2-21R	2100	±50	200	4	1.25	3000	Version R	BOD-Package
IXBOD2-22R	2200	±50	200	4	1.25	3000	Version R	BOD-Package
IXBOD2-23R	2300	±50	200	4	1.25	3000	Version R	BOD-Package
IXBOD2-24R	2400	±50	200	4	1.25	3000	Version R	BOD-Package
IXBOD2-25R	2500	±50	200	4	0.9	3000	Version R	BOD-Package
IXBOD2-26R	2600	±100	200	4	0.9	3000	Version R	BOD-Package
IXBOD2-28R	2800	±100	200	4	0.9	3000	Version R	BOD-Package
IXBOD2-30R	3000	±100	200	4	0.9	3000	Version R	BOD-Package
IXBOD2-32R	3200	±100	200	4	0.9	3000	Version R	BOD-Package
IXBOD2-33R	3300	±100	200	4	0.9	3000	Version R	BOD-Package
IXBOD2-34R	3400	±100	200	4	0.9	3000	Version R	BOD-Package
IXBOD2-36R	3600	±100	200	4	0.9	3000	Version R	BOD-Package
IXBOD2-38R	3800	±100	200	4	0.7	3000	Version R	BOD-Package
IXBOD2-40R	4000	±100	200	4	0.7	3000	Version R	BOD-Package
IXBOD2-42R	4200	±100	200	4	0.7	3000	Version R	BOD-Package

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.
VBO tolerance is ±50 V up to 2300 V and ±100 V for ≥2500 V devices.

Figure 1. Typical V-I Characteristics

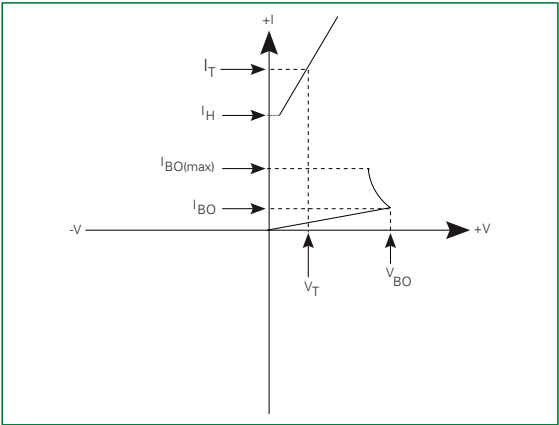

IXBOD2 Breakover Behavior - Typical Characteristics

Devices remain in the off state (high impedance) until the specified breakover voltage (V_{BO}) is exceeded.

At breakover, the device switches rapidly to a low impedance state, enabling controlled current flow.

Holding current (I_H) defines the minimum current required to maintain conduction after triggering.

Version R and Version RD exhibit similar breakover behavior. Version RD includes an integrated diode, providing defined reverse blocking (VRRM) capability for specific applications.

The curve shown is representative of IXBOD2 discrete devices and is provided for functional reference only. Refer to individual datasheets for conditions and limits.

Thyristors




Thyristors are one of the most rugged controlled semiconductor devices. They feature the highest current capacity per chip area, especially at high voltages, and are mainly used as control devices in 50 Hz and 60 Hz AC main equipment.


Principal applications include static converter circuits for the speed control of DC-drives, switching, and control functions for temperature, lighting, soft-start, etc. in single-phase and three-phase AC switch configurations. Phase control thyristors are designed for optimal forward conduction and reverse-blocking characteristics. Since their applications typically do not demand fast switching, they have only moderate requirements for turn-on and turn-off performance.

Phase Control Thyristors

$I_{TAV} = 5-30\text{ A}$



CLB...




CS.../CL/MA...E/I...

Part Number	V_{RRM} V_{DRM}	I_{TAV}	@ T_C	$I_{T(RMS)}$	I_{TSM} 45 °C 10 ms	$(dv/dt)_{cr}$	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	°C	A	A	V/ μ s	V	m Ω	°C	K/W	K/W	
CLA5E1200UC	1200	5	135	8	70	500	0.89	85.0	150	1.50	0.50	TO-252AA
CLA5E1200PZ											0.25	TO-263ABHV
CLA15E1200NPB											0.50	TO-220AB
CLA15E1200NPZ	1200	15	120	33	170	500	0.89	30	150	0.95	0.30	TO-263ABHV
CLA16E800PN											0.50	TO-220ABFP
CLA16E1200PN											4.00	TO-220ABFP
CS19-08ho1	800	20	110	31	160	500	0.86	22	150	0.70	0.50	TO-220AB
CS19-12ho1												TO-220AB
CS19-08ho1S												TO-263AB
CS19-12ho1S	1200	20	110	31	160	500	0.86	22	150	0.70	0.50	TO-263AB
CMA20E1600PB												TO-220AB
CMA20E1600PZ											0.25	TO-263ABHV
CS20-12io1	1200	20	130	31	260	1000	0.87	17.3	150	0.60	0.25	TO-247AD
CS20-14io1												TO-247AD
CS20-16io1												TO-247AD
CS20-22moF1	2200	18	85	28	200	2500	0.97	17	125	0.92	0.15	ISOPLUS i4-PAC™
CS20-25mo1F												ISOPLUS i4-PAC™
CS20-25moT1												TO-268AA
CS22-08io1M	800	16	90	25	300	500	0.86	13.2	150	2.50	0.50	TO-220ABFP
CS22-12io1M												TO-220ABFP
CLA30E1200PB												TO-220AB
CLA30E1200PC	1200	30	115	47	300	500	0.86	13.2	150	0.50	0.25	TO-263AB
CLA30E1200NPZ												TO-263ABHV

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

Phase Control Thyristors


$I_{TAV} = 30\text{--}160\text{ A}$



CLB...



CS.../CL/MA...E/I...



CLA.CMA...P...

Part Number	V_{RRM} V_{DRM}	I_{TAV}	@ T_C	$I_{T(RMS)}$	I_{TSM} 45°C 10 ms	$(dv/dt)_{cr}$	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	°C	A	A	V/ μ s	V	m Ω	°C	K/W	K/W	
CLB30I1200PZ	1200	30	115	47	300	500	0.86	13.2	150	0.50	0.25	TO-263ABHV
CLA30E1200HB	1200	30	120	47	300	500	0.86	12.5	150	0.50	0.25	TO-247AD
CLB30I1200HB ¹												TO-247AD
CMA30E1600PB	1600	30	115	47	260	500	0.92	18	150	0.75	0.50	TO-220AB
CMA30E1600PZ	1600	30	115	47	260	500	0.92	18	150	0.75	0.25	TO-263ABHV
CMA30E1600PN	1600	30	40	47	260	500	0.92	18	150	2.50	0.50	TO-220ABFP
CS30-12io1	1200	30	120	47	400	1000	0.87	14.2	150	0.50	0.25	TO-247AD
CS30-14io1	1400											
CS30-16io1	1600											
CMA30P1600FC	2 × 1600	30	90	47	400	1000	0.87	14.2	150	1.00	0.20	ISOPLUS i4-PAC™
CLA40E1200NPZ	1200	40	125	63	520	500	0.85	9.9	150	0.40	0.25	TO-263ABHV
CLA40E1200NHB	1200	40	120	63	520	500	0.85	9.2	150	0.50	0.25	TO-247AD
CLA40E1200HR	1200	40	95	63	650	1000	0.85	7.9	150	0.80	0.30	ISO247™
CLB40I1200PZ	1200	40	125	63	520	500	0.85	9.9	150	0.40	0.25	TO-263ABHV
CLA40P1200FC	2 × 1200	40	95	63	650	1000	0.86	7.9	150	0.80	0.20	ISOPLUS i4-PAC™
CMA40E1600HR	1600	40	90	63	550	1000	0.81	9.8	150	0.80	0.30	ISO247™
CS45-08io1	800	45	110	71	520	1000	0.88	11	150	0.40	0.25	TO-247AD
CS45-12io1	1200											
CS45-16io1	1600											
CS45-16io1R	1600	45	80	71	520	1000	0.88	11	150	0.80	0.25	ISOPLUS247™
CLA50E1200HB	1200	50	125	79	650	1000	0.88	7.7	150	0.25	0.25	TO-247AD
CLA50E1200TC											0.15	TO-268AA
CMA50E1600TZ	1600	50	110	79	550	1000	0.83	9.6	150	0.40	0.15	TO-268HV
CMA50E1600HB											0.25	TO-247AD
CMA50E1600QB												TO-3P
CMA50P1600FC	2 × 1600	50	90	79	720	1000	0.88	6.7	150	0.70	0.20	ISOPLUS i4-PAC™
CS60-12io1	1200	60	110	75	1400	1000	0.82	5.3	140	0.32	0.15	PLUS247
CS60-14io1	1400											
CS60-16io1	1600											
CS60-16io1R	1600	60	90	75	1400	1000	0.82	5.3	140	0.45	0.15	ISOPLUS247™
CLA80E1200HF	1200	80	115	126	900	1000	0.88	6.3	150	0.20	0.25	PLUS247
CMA80E1600HB	1600	80	115	126	720	1000	0.9	6.4				TO-247AD
CMA160E1600HF	1600	160	80	250	1400	1000	0.88	4.96	150	0.15	0.15	TO-247AD
CLA100E1200HB	1200	100	105	160	1100	1000	0.82	5.2	150	0.20	0.15	TO-247AD
CLA100E1200KB												TO-264
CLA100E1200TZ												TO-268HV
CLA120E1200HB	1200	120	105	190	1500	1000	0.82	4.6	150	0.16	0.15	TO-247AD

¹ Anode-gated

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

Fast Phase Control Thyristors

Part Number	V_{RRM} V_{DRM}	I_{TAV}	@ T_C	$I_{T(RMS)}$	I_{TSM} 45°C 10 ms	$(dv/dt)_{cr}$	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	°C	A	A	V/ μ s	V	m Ω	°C	K/W	K/W	
CLE20E1200PC	1200	20	115	31	160	500	0.92	24	150	0.7	0.25	TO-263AB
CME30E1600PZ	1600	30	105	47	280	500	0.96	25	150	0.5	0.25	TO-263ABHV
CLF20E1200PB	1200	20	110	31	150	500	0.96	26	150	0.7	0.50	TO-220AB
CLE30E1200PB	1200	30	115	47	270	500	0.92	14	150	0.5	0.50	TO-220AB
CNE60E2200TZ	2200	60	80	94	720	1000	1.90	12.6	150	0.3	0.15	TO-268AA
CLE90UH1200TLB	1200	90	90	—	350	500	0.92	13	150	0.9	0.40	SMPD-B

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

Thyristors



SCR

Littelfuse SCR products are half-wave, silicon-controlled rectifiers that represent the state of the art in design and performance. Due to their unidirectional switching capability, SCR are used in circuits where high surge currents or latching actions are required. They may also be used in applications requiring half-wave-type circuits with gate-controlled. Applications include crowbars in power supplies, camera flash units, smoke alarms, motor controls, battery chargers, and engine ignition.

Standard SCRs

Series Number	V _{DRM} V _{RRM}					I _{T(RMS)}	I _{GT} max	T _J	Package																
									Surface Mount							Through-hole									
	400	600	800	1000	1200				A	mA	°C	SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-225AA	TO-220 Iso	TO-220	TO-218AC Iso
	V																								
NYC0102B (200V)	–	–	–	–	–	0.25	0.2	125	•	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
S8X5ECSx	–	–	•	–	–	0.5	0.03, 0.05, 0.1	125	–	–	–	–	–	–	–	–	•	–	–	–	–	–	–	–	–
SxX8BBSx	–	•	–	–	–	0.8	0.2, 0.45	125	•	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
SxX8xSx	•	•	•	–	–	0.8	0.005, 0.05, 0.2, 0.45	125	–	–	•	•	–	–	–	–	•	–	–	–	–	–	–	–	–
EC103x/SxSx	•	•	–	–	–	0.8	0.012, 0.05, 0.2, 0.5	110	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–	–
Sx01E/SxN1	•	•	–	–	–	1	10	110	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–	–
S802CSx	–	–	•	–	–	1.25	0.05, 0.1	110	–	–	–	–	•	–	–	–	–	–	–	–	–	–	–	–	–
Sx02xSx	•	•	–	•	–	1.5	0.05, 0.1, 0.2	125	–	–	•	•	–	–	–	–	•	–	–	–	–	–	–	–	–
TCR22-x	•	•	–	–	–	1.5	0.2	110	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–	–
S802xSx	–	–	•	–	–	1.5	0.1	125	–	–	–	•	–	–	–	–	•	–	–	–	–	–	–	–	–
STx802U2Sx	–	–	•	–	–	1.5	0.1	125	–	•	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
S6002xS	–	•	–	–	–	2	0.2	125	–	–	–	•	•	–	–	–	•	–	–	–	–	–	–	–	–
C106x,MCR106-x	•	•	–	–	–	4	0.2	125	–	–	–	–	–	–	–	–	•	–	–	–	–	–	–	–	–
Sxx04xSx	•	•	–	–	–	4	0.05, 0.2	125	–	–	–	–	–	–	•	–	–	•	–	–	–	–	–	–	–
Sxx06xxx	•	•	•	•	–	6	0.2, 0.5,15	125	–	–	–	–	–	–	•	•	–	–	•	–	•	•	–	–	–
Sxx08xxx	•	•	•	•	–	8	0.05, 0.1, 0.2, 0.5,15	125	–	–	–	–	–	–	•	•	–	–	•	–	•	•	–	–	–
SRUK208x	–	–	–	–	•	8	15	125	–	–	–	–	–	–	•	–	–	–	–	–	–	•	–	–	–
Sxx10xxx	•	•	•	•	–	10	0.2, 0.5, 15	125	–	–	–	–	–	–	•	•	–	–	•	–	•	•	–	–	–
Sxx12xx	•	•	•	•	–	12	20	125	–	–	–	–	–	–	•	•	–	–	•	–	•	•	–	–	–
MCR12DSx	–	•	•	–	–	12	0.2	110	–	–	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–
Sxx16xx	•	•	•	•	–	16	30	125	–	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–
SK230	–	–	–	•	–	30	30	125	–	–	–	–	–	–	–	•	–	–	–	–	–	•	–	–	–
Sxx20xx	•	•	•	•	–	20	30	125	–	–	–	–	–	–	–	–	–	–	–	–	•	–	–	–	–
Sxx25xx	•	•	•	•	–	25	35	125	–	–	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–
SK230	–	–	–	–	•	30	30	125	–	–	–	–	–	–	–	•	–	–	–	–	–	•	–	–	–

Standard SCRs

Series Number	V _{DRM} V _{RRM}					I _{T(RMS)}	I _{GT} max	T _J	Package																
									Surface Mount						Through-hole										
	400	600	800	1000	1200				SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-225AA	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
	V																								
Sxx35x	•	•	•	•		35	40	125	–	–	–	–	–	–	–	–	–	–	–	•	–	•	–		
Sxx40x	•	•	•	•		40	40	125	–	–	–	–	–	–	•	–	–	–	–	•	–	–	–		
S4040xQx	•	–	–	–		40	35, 45, 60	125	–	–	–	–	–	–	•	–	–	–	–	•	–	–	–		
Sxx55x	•	•	•	•		55	40	125	–	–	–	–	–	–	–	–	–	–	•	•	•	–	–		
Sxx65x	•	•	•	•		65	50	125	–	–	–	–	–	–	–	–	–	–	–	–	•	•	–		
Sxx70x	•	•	•	–		70	50	125	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–		

High Temperature SCRs

Series Number	V _{DRM} V _{RRM}				I _{T(RMS)}	I _{GT} max	T _J	Package																
								Surface Mount						Through-hole										
	400	600	800	1000				SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-225AA	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
A	mA				°C																			
V																								
SJxx04xSx	•	•	–	–	4	0.2	150	–	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–
SJxx06xxx	•	•	–	–	6	0.2, 6, 15	150	–	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–
SJxx08xxx	•	•	•	–	8	0.2, 6, 15	150	–	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–
SJxx10xxx	•	•	–	–	10	0.2, 6, 15	150	–	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–
SJxx12xx	•	•	–	–	12	6, 10, 20	150	–	–	–	–	–	•	–	–	–	•	–	•	•	–	–	–	–
SVxx12xx	•	•	•	–	12	6, 10	150	–	–	–	–	–	•	•	–	–	–	•	•	–	–	–	–	–
SVxx12xxQ	•	•	–	–	12	6, 10	150	–	–	–	–	–	•	•	–	–	–	•	•	–	–	–	–	–
SJxx16xx	•	•	–	–	16	6, 10, 30	150	–	–	–	–	–	•	•	–	–	–	•	•	–	–	–	–	–
SVxx16xx	–	•	–	–	16	6, 10	150	–	–	–	–	–	•	•	–	–	–	•	•	–	–	–	–	–
SVxx16xxQ	•	•	–	–	16	6, 10	150	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–	–
SJxx20xx	•	•	–	–	20	6, 10, 35	150	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–	–
SVxx20xx	•	•	–	–	20	6, 10	150	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–	–
SVxx20xxQ	•	•	–	–	20	6, 10	150	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–	–
SJxx25xx	•	•	•	–	25	6, 10, 35	150	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–	–
SVxx25xx	•	•	–	–	25	6, 10	150	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–	–
SVxx25xxQ	•	•	–	–	25	6, 10	150	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–	–
SJxx32xx	•	•	–	–	32	15, 40	150	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–	–
SJxx40xx	•	•	–	–	40	15, 40	150	–	–	–	–	–	•	–	–	–	–	•	•	–	–	–	–	–
SV6050xx	–	•	–	–	50	15	150	–	–	–	–	–	•	–	–	–	–	–	•	–	–	–	–	–

Automotive Grade AECQ101 Qualified SCRs

Series Number	V _{DRM} V _{RRM}				I _{T(RMS)}	I _{GT} max	T _J	Package																			
								Surface Mount						Through-hole													
	400	600	800	1000				A	mA	°C	SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-225AA	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
S6002CASRP	–	●	–	–	2	0.2	125	–	–	–	–	●	–	–	–	–	–	–	–	–	–	–	–	–	–		
S8016xAx	–	–	●	–	16	50	125	–	–	–	–	–	–	●	–	–	–	–	–	–	●	–	–	–	–		
SJxx20xxA	●	●	–	–	20	6, 10, 35	150	–	–	–	–	–	–	●	–	–	–	–	●	●	–	–	–	–	–		
SJxx25xxA	●	●	–	–	25	6, 10, 35	150	–	–	–	–	–	–	●	–	–	–	–	●	●	–	–	–	–	–		
SJxx32xxA	●	●	–	–	32	15, 40	150	–	–	–	–	–	–	●	–	–	–	–	●	●	–	–	–	–	–		
SJxx40xxA	●	●	–	–	40	15, 40	150	–	–	–	–	–	–	●	–	–	–	–	●	●	–	–	–	–	–		
HS4040xAQx	●	–	–	–	40	35, 45, 65	150	–	–	–	–	–	–	●	–	–	–	–	–	●	–	–	–	–	–		
SV6050xAx	–	●	–	–	50	15	150	–	–	–	–	–	–	●	–	–	–	–	–	●	–	–	–	–	–		

Thyristors




TRIAC

Switching thyristors are solid state switches that are normally open circuits (very high impedance), capable of withstanding rated blocking/off-state voltage until triggered to on state. Littelfuse offers Triac, QUADRAC® Semiconductors, SCRs, rectifiers and Alternistor Triacs for control circuit applications requiring the best commutating and noise immunity. These products are available in various configurations for a wide range of currents blocking/off-state voltages, packages, and triggering.

TRIAC 1 Phase

$I_{RMS} = 30-650 \text{ A}$



...MT...

Part Number	V_{RRM}	V_{VRMS}	I_{RMS}	@ T_C	$I_{TSM} \text{ 10 ms, 45 } ^\circ\text{C}$	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thJH}	Package
	V	V	A	$^\circ\text{C}$	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
CLA30MT1200NPB	1200	400	33	120	170	0.89	30.5	150	0.95	1.45	TO-220AB
CLA30MT1200NPZ	1200	400	33	120	170	0.89	30.5	150	0.95	1.20	TO-263ABHV
CLA40MT1200NPB	1200	400	44	110	180	0.89	27.9	150	0.80	1.30	TO-220AB
CLA40MT1200NPZ	1200	400	44	110	180	0.89	27.9	150	0.80	1.05	TO-263ABHV
CLA40MT1200NHB	1200	400	44	110	180	0.89	27.9	150	0.80	1.05	TO-247AD
CLA60MT1200NHB	1200	400	66	120	380	0.86	12.5	150	0.55	0.80	TO-247AD
CLA60MT1200NTZ	1200	400	66	120	380	0.86	12.5	150	0.55	0.70	TO-268AA
CLA60MT1200NHR	1200	400	66	100	380	0.86	12.5	150	0.90	1.15	ISO247™
CMA60MT1600NHB	1600	500	66	115	260	0.9	16.6	150	0.55	0.80	TO-247AD
CMA60MT1600NHR	1600	500	66	90	260	0.9	16.6	150	0.90	1.15	ISO247™
CLA80MT1200NHB	1200	400	88	120	480	0.85	9.2	150	0.40	0.65	TO-247AD
CLA80MT1200NHR	1200	400	88	100	480	0.85	9.2	150	0.65	0.90	ISO247™
CMA80MT1600NHB	1600	400	88	115	400	0.9	12	150	0.40	0.65	TO-247AD
CMA80MT1600NHR	1600	500	88	95	400	0.9	12	150	0.65	0.90	ISO247™
MCMA650MT1400NKD	1400	440	650	85	9600	0.81	0.68	140	0.12	0.04	Y1-2-Cu
MCMA650MT1800NKD	1800	575	650	400	9600	0.81	0.68	140	0.12	0.04	Y1-2-Cu

Indicative values shown for selection comparison only. Detailed test conditions, parameters, and limits is defined in the product datasheet.

Standard TRIACs

Series Number	V _{DRM}				I _{T(RMS)}	T _J max	I _{GT(QI)} max	Package																
	400	600	800	1000				Surface Mount						Through-hole										
								A	°C	mA	SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC
	V																							
LX507MBB	–	•	–	–	0.5	125	5	•	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–
LxX8Ex / LxXx/ QxX8Ex / QxXx	•	•	–	–	0.8	125	3, 5, 10, 25	–	–	–	–	•	–	–	•	–	–	–	–	–	–	–	–	–
LX8	•	•	–	–	0.8	125	3, 5, 10	–	–	•	•	–	–	–	–	–	–	–	–	–	–	–	–	–
Lx01Ex / LxNx / Qx01Ex / QxNx	•	•	–	–	1	110	3, 5, 10, 25	–	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–	–
L01	•	•	•	–	1	125	3, 5, 10	–	–	–	•	–	–	–	•	–	–	–	–	–	–	–	–	–
T2322B (200V)	•	–	–	–	2.5	110	10	–	–	–	–	–	–	–	•	•	–	–	–	–	–	–	–	–
2N607xA/B	•	•	–	–	4	110	3, 5	–	–	–	–	–	–	–	•	•	–	–	–	–	–	–	–	–
Lxx04xx / Qxx04xx	•	•	•	•	4	125	3, 5, 10, 25	–	–	–	–	–	•	–	–	–	•	•	•	–	–	–	–	–
Lxx06xx / Qxx06xx / Qxx06xHx	•	•	•	•	6	125	5, 10, 25, 35, 50	–	–	–	–	–	•	•	–	–	•	•	•	–	–	–	–	–
Lxx08xx / Qxx08xx / Qxx08xHx	•	•	•	•	8	125	5, 10, 25, 35, 50	–	–	–	–	–	•	•	–	–	•	•	•	–	–	–	–	–
Q6008xH1LED	•	•	–	–	8	125	10	–	–	–	–	–	–	•	–	–	–	•	•	–	–	–	–	–
Qxx10xx / Qxx10xHx	•	•	•	•	10	125	5, 25, 50	–	–	–	–	–	–	•	–	–	–	•	•	–	–	–	–	–
Qxx12xHx	•	•	•	•	12	125	10, 50	–	–	–	–	–	–	•	–	–	–	•	•	–	–	–	–	–
Q6012xH1LED	•	•	–	–	12	125	10	–	–	–	–	–	–	•	–	–	–	•	•	–	–	–	–	–
Qxx15xx / Qxx16xHx	•	•	•	•	15	125	10, 25, 35, 50, 80	–	–	–	–	–	–	•	–	–	–	•	•	–	–	–	–	–
Q6016LH1LED	–	•	–	–	16	125	5	–	–	–	–	–	–	–	–	–	–	•	•	–	–	–	–	–
Qxx25xx / Qxx25xHx	•	•	•	•	25	125	50, 80	–	–	–	–	–	–	–	•	–	–	–	•	•	•	–	•	•
Q6035NAH5	–	•	–	–	35	125	50	–	–	–	–	–	–	–	•	–	–	–	•	–	–	–	–	–
Qxx30xHx / Qxx35xHx	•	•	–	–	30	125	25, 50	–	–	–	–	–	–	•	–	–	–	•	•	–	–	–	–	–
Qxx40xx	•	•	•	•	40	125	35, 50, 80, 100	–	–	–	–	–	–	–	–	–	–	–	–	•	•	•	•	•
MS0690J-D1TE (SOT-227)	–	•	–	–	90	125	50	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–	–

OV TRIACs

Series Number	V _{DRM}				I _{T(RMS)}	T _J max	I _{GT(QI)} max	Package															
								Surface Mount							Through-hole								
	400	600	800	1000				SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
	V																						
QSxx04xHx	–	–	●	–	4	125	10, 35	–	–	–	–	–	●	–	–	–	–	–	–	–	–	–	

Automotive Grade AECQ101 Qualified TRIACs

Series Number	V _{DRM}				I _{T(RMS)}	T _J max	I _{GT(QI)} max	Package																		
								Surface Mount						Through-hole												
	400	600	800	1000				A	°C	mA	SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
	V																									
Q6035NAH5	—	●	—	—	35	125	50	—	—	—	—	—	—	—	●	—	—	—	—	—	—	—	—	—		

Thyristors

High Temperature TRIACs

Series Number	V _{DRM}				I _{T(RMS)}	T _J max	I _{GT(QI)} max	Package															
								Surface Mount						Through-hole									
	400	600	800	1000				SOT23	SO-8	SOT-89	SOT-223	DO-214-3L	TO-252	TO-263	TO-92-3L	TO-225 (C77)	TO-251	TO-220 Iso	TO-220	TO-218AC Iso	TO-218AC	TO-218X Iso	TO-218X
	V																						
LJxx04xx / QJxx04xx	●	●	–	–	4	150	10, 25	–	–	–	–	–	●	–	–	–	●	–	–	–	–	–	
LJxx06xx / QJxx06xHx/QJxx06xx	●	●	●	–	6	150	10, 20, 35, 50	–	–	–	–	–	●	●	–	–	●	●	●	–	–	–	
LJxx08xx / QJxx08xHx /QJxx08xx	●	●	●	–	8	150	10, 20, 35, 50	–	–	–	–	–	●	●	–	–	●	●	●	–	–	–	
QJxx10xx / QJxx10xHx	–	●	●	–	10	150	10, 25, 35, 50	–	–	–	–	–	–	●	–	–	–	●	●	–	–	–	
QJxx12xHx	–	–	●	–	12	150	35, 50	–	–	–	–	–	–	●	–	–	–	●	●	–	–	–	
QVxx12xHx	–	●	●	–	12	150	20, 35, 50	–	–	–	–	–	●	●	–	–	–	●	●	●	–	–	
QJxx16xHx	–	●	●	–	16	150	10, 20, 35, 50, 80	–	–	–	–	–	–	●	–	–	–	●	●	●	–	–	
QVxx16xHx	–	●	●	–	16	150	10, 20, 35, 50	–	–	–	–	–	–	●	–	–	–	●	●	–	–	–	
HQ6025xH5	–	●	–	–	25	150	50	–	–	–	–	–	–	●	–	–	–	●	●	●	–	–	
QJxx25xHx	●	●	●	–	25	150	35, 50, 80	–	–	–	–	–	–	●	–	–	–	●	●	●	–	●	
QVxx25xHx	–	●	●	–	25	150	35, 50	–	–	–	–	–	–	●	–	–	–	●	●	–	–	–	
QJxx30LH4	–	●	●	–	30	150	35, 50	–	–	–	–	–	–	●	–	–	–	●	●	–	–	–	
QJxx35xHx	–	●	●	–	30	150	35, 50	–	–	–	–	–	–	●	–	–	–	●	●	–	–	–	
QVxx35xHx	–	●	●	–	35	150	35	–	–	–	–	–	–	●	–	–	–	●	●	–	–	–	
QJxx40xx	–	●	●	–	40	150	35, 50, 80, 100	–	–	–	–	–	–	–	–	–	–	–	●	–	●	–	

Quadrac


Series Number	V _{DRM}				I _{T(RMS)}	T _J max	V _{BO} max	I _H max	Package
	400	600	800	1000	A	°C	V	mA	
	V								
Qxx04LT	•	•	–	–	4	125	43	40	TO-220 Iso
Qxx06LT / Qxx06LTH	•	•	–	–	6	125	43	50	TO-220 Iso
Qxx08LT / Qxx08LTH	•	•	–	–	8	125	43	60	TO-220 Iso
Qxx10LT / Qxx10LTH	•	•	–	–	10	125	43	60	TO-220 Iso
Qxx15LT / Qxx15LTH	•	•	–	–	15	125	43	70	TO-220 Iso
Q6008LTH1LED	–	•	–	–	8	125	43	6	TO-220 Iso
Q6012LTH1LED	–	•	–	–	12	125	43	8	TO-220 Iso

SIDAC

Part Number	SIDAC Type	Nominal VBO																I _{TRM} @ 5 Hz	I _{TRM} @ 60 Hz	T _J Max	Package						
		82	90	105	110	120	130	140	150	180	200	220	230	240	250	300	360				SMA	SMB	DO-15	TO-92-2L			
		V																							A	A	°C
Kxxx0yU	Unidirectional	•	•	•	•	•	•	•	•	•	•	•	•	•	–	–	160 / 280		80 / 120		125 / 150		•	–	•	–	
Kxxxzy	Bidirectional	–	•	•	•	•	•	•	•	•	•	•	–	•	•	•	–	160		80		125		–	•	•	•
Kxxx0yH	Bidirectional	–	–	–	–	–	–	–	–	–	–	–	•	•	•	–	–	280		120		125		–	•	•	•
Kxxx1GL	Multipulse	–	–	–	–	–	–	–	–	–	–	–	•	•	•	•	•	n/a		n/a		125		–	–	•	–
K2xx0yHU	Unidirectional	–	–	–	–	–	–	–	–	–	•	•	–	•	•	–	–	280		120		125		–	•	•	–
Kxxx1G	Multipulse	–	–	–	–	–	–	–	–	–	•	•	•	•	•	–	•	n/a		n/a		125		–	–	•	–

Power Semiconductor Chips

Bipolar Chips	V_{RRM}/V_{DRM}	$I_{F(AV)M}/I_{T(AV)M}$	t_{rr}
	V	A	ns
Schottky Diodes	8 – 200	5 – 300	–
HiPerFRED™ (Low Leakage)	200 – 1200	10 – 150	30 – 40
Sonic™ Fast Recovery Diodes	600 – 1800	5 – 150	30 – 60
FRED™ (Low Forward Voltage Drop)	200 – 1200	10 – 150	40 – 60
Semi-Fast Diodes	1200 – 1600	15 – 60	60 – 100
Rectifier Diodes	1200 – 2200	10 – 400	–
Phase Control Thyristors	800 – 2200	5 – 300	–

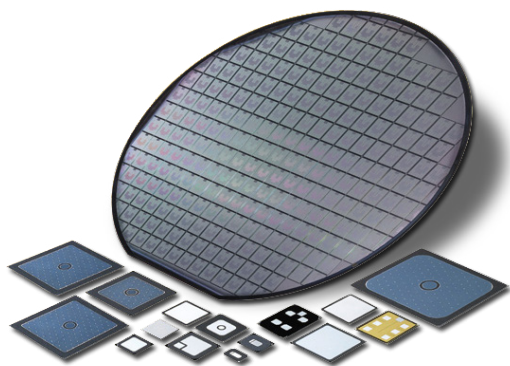

Mode of Shipment

- In wafer form, unsawn, electrically tested, rejects are inked
- Sawn wafer on foil, electrically tested, rejects are inked
- Known good die in tray (Waffle Pack)
- Customized die sizes and geometries available upon request

For chip sales please see:

<https://www.littelfuse.com/products/power-semiconductors>

Power Modules

Nomenclature

Rectifier & IGBT Module Nomenclature

Example Part Number

Index	0	1	2	3	Value 1	4	5	Value 2	6 (a-c)	6d	7	8	9	
Example 1	M	I	T	G	200	W		1200	P	T	E	H	-	PC
Example 2		C	M	A	20	E		1600			P	Z	-	TRL

Examples for Indices

Index	Description	Index 1 & 2	Description	Detailed
0	M = Module; no letter for discretes	CL	High Efficiency Thyristor	up to 1200 V
1	Kind of main chip C = SCR, D = Diode, I = IGBT, M = MOSFET	CM	Standard Thyristor	up to 1800 V
2	Chip technology	CN	High Voltage Thyristor	≥ 2000 V
3	Chip generation resp. precisely defined technology	DF	FRED	Gold
Value 1	Current rating	DH	Sonic Fast Recovery	Helium
4	Basic circuit	DL	Low Voltage Rectifier	up to 1200 V
5	Precisely defined circuit	DM	Standard Rectifier	up to 1800 V
Value 2	Voltage rating	DN	High Voltage Standard Rectifier	≥ 2000 V
6 (a-c)	as Index 1-3; usage e.g. for special chips like SiC	DP	HiPerFREDTM	Platinum
6d	Specials (e.g.: thermistor)	DS	Diode	Schottky
7	Basic package	IT	IGBT	Trench
8	Precisely defined package	IX	IGBT	XPT
Hyphen	-	MC	MOSFET	SiC
9	Extras: e.g. delivery format, auxiliaries	MT	MOSFET	Trench

Index 4	Description	Detailed	Index 4 & 5
A	Common Anode / Emitter / Source	Thyristor/Diode	AD
B	1~ Rectifier Bridge	Half-controlled (High side)	BH
C	Common Cathode / Collector / Drain	Thyristor/Diode	CD
E	Single Part	With multiple Cathode pins	EM
H	H-Bridge	+ 1~Rectifier Bridge	HD
I	Single Part	Copack	IF
M	AC-Controller	as Triac	MT
P	Phase-leg	High-side Thyristor, low-side Diode	PD
Q	Buck Chopper	with series Connected dice	QS
R	Boost/Brake Chopper	with free wheeling diode	RG
S	Brake Chopper	with free wheeling diode	SF
U	3~ Rectifier Bridge	with Brake unit	UB
W	6-Pack	with 3~ Converter and Brake unit	WB
X	Parallel legs	anti-parallel	XA
Y	Half 3~ Bridge	Common Anode	YA

Index 7 & 8 Modules	Description	Index 7 & 8 Modules	Description
CA	ComPack	TA	TO-240AA-1B
CB	ComPack	TB	TO-240AA-1B
CC	ComPack	TG	TO-240AA-1B
ED	E2-Pack	VA	V1-A-Pack
EH	E3-Pack	VC	V1-B-Pack
KA	Y1-CU	VH	V2-Pack
KB	Y1-CU	YA	Y4-M6
KC	Y1-CU	YB	Y4-M6
SF	Simbus F	YD	Y4-M6

Index 6d	Specials	Index 9	Packaging
P	PressFit-Pin	NI	No Metal Inserts
PT	PressFit-Pin = Thermistor	PC	Phase Change Material
PST	PressFit-Pin + Shunt + Thermistor	TRL	Tape & Reel Left
S	Shunt	TRR	Tape & Reel Right
T	Thermistor	TUB	Tube

Rectifier Modules

Technology Overview

One of the essential advantages of power semiconductor modules has over discrete designs is the electrical isolation between the baseplates of the module and the internal high-voltage circuit components (3.6 - 4.8 kV_{RMS} tested). This isolation allows multiple modules to be mounted to a common heatsink. It also enables the use of standard housings and accessories to design a compact power converter operating from AC mains up to 690 V.

Plastic Housing with DCB Substrate

Littelfuse has succeeded in simplifying the conventional multilayer module construction by applying the direct copper bonding (DCB) technique.

Other features include:

- Top-side electrical terminals with captured nuts
- Series-connected diode/diode, thyristor/diode, and thyristor/thyristor modules
- Easy assembly

All thyristor modules with DCB ceramic base contacts are available in volume with two standardized twin plugs (2.8 mm × 0.8 mm) for gate and auxiliary cathode control terminals (version 1). Modules in TO-240 housing of version 8 are delivered with gate plugs only (i.e., without auxiliary cathode terminal; mounting screws available on request). The module housing is designed for adequate clearance and creepage distance, resulting in  recognition by Underwriters Laboratories, Inc., USA for all types.


New Generation Silicon Chips

All chips are designed using separation diffusion processes ensuring the zones responsible for the surface field strength are located at the upper chip side. This allows the entire chip area to be directly soldered onto the DCB ceramic substrate without a molybdenum strain buffer, resulting in improved stability and large area heat dissipation under load. Edge termination regions, which are critical for maintaining high block voltage capability are passivated using glass with a coefficient of thermal expansion closely matched to silicon. Planar technology with guard rings and channel stoppers is increasingly used to reduce surface electric fields, replacing older designs based on passivation moats. As a result, the new generation modules utilize planar passivated chips manufactured using separation diffusion techniques. The chip contact areas are metallized using physical vapor deposition. These design improvements provide the following benefits:

- Excellent long-term stability of blocking currents and blocking voltages
- Increased life time of the internal soldered connections
- High power cycling capability (> 50 000)

Thyristor and diode chips have been optimized for improved turn-off performance. Reduced carrier lifetime lowers stored charge (QS), significantly decreasing the need for RC snubber circuits for over-voltage protection. This contributes to both cost reduction and improved system efficiency. Further enhancements in firing characteristics have been achieved by increasing the “gate current not to fire” (IGD), reducing susceptibility to unintended triggering (misfiring). This improves operational safety and overall equipment reliability.

Fig. 1: Principle Cross Section of an Littelfuse Module with DCB Technology

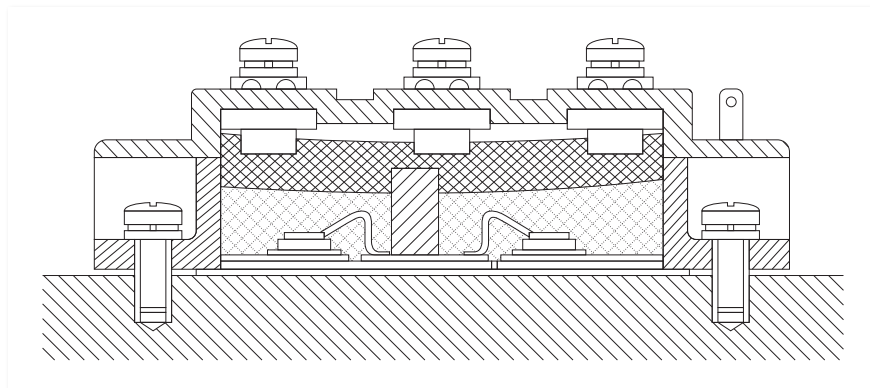


Rectifier Modules



X125e
TO-240AA



X131c
Y1




X143a
SimBus A F PFP




X126c
Y4



X141c
SimBus A



MDA



**MDD...
MDM/NA...P...**

Diodes Modules—Dual

$I_{FAV} = 25-85\text{ A}$

Part Number	V_{RRM}	I_{FAV}	T_C	$I_{FSM} 45^\circ\text{C } 10\text{ ms}$	V_{F0}	r_F	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
MDMA25P1200TG	1200	25	100	320	0.85	11.10	150	1.10	0.20	TO-240AA (e)
MDMA25P1600TG	1600									
MDMA25P1800TG	1800									
MDNA25P2200TG	2200									
MDD26-08N1B	800	36	100	650	0.80	6.10	150	1.00	0.20	To-240AA (e)
MDD26-12N1B	1200									
MDD26-14N1B	1400									
MDD26-16N1B	1600									
MDD26-18N1B	1800	35	100	500	0.83	7.30	150	0.90	0.20	TO-240AA (e)
MDMA35P1200TG	1200									
MDMA35P1600TG	1600									
MDMA35P1800TG	1800									
MDNA35P2200TG	2200	59	100	1150	0.80	4.30	150	0.59	0.20	TO-240AA (e)
MDD44-08N1B	800									
MDD44-12N1B	1200									
MDD44-14N1B	1400									
MDD44-16N1B	1600	59	100	1150	0.80	4.30	150	0.59	0.20	TO-240AA (e)
MDD44-18N1B	1800									
MDMA50P1200TG	1200	50	100	850	0.85	5.70	150	0.65	0.20	TO-240AA (e)
MDMA50P1600TG	1600									
MDMA50P1800TG	1800									
MDNA50P2200TG	2200									
MDD56-08N1B	800	71	100	1400	0.80	3.00	150	0.51	0.20	TO-240AA (e)
MDD56-12N1B	1200									
MDD56-14N1B	1400									
MDD56-16N1B	1600									
MDD56-18N1B	1800	71	100	1400	0.80	3.00	150	0.51	0.20	TO-240AA (e)
MDMA65P1200TG	1200									
MDMA65P1600TG	1600									
MDMA65P1800TG	1800									
MDNA65P2200TG	2200	85	100	1500	0.79	3.50	150	0.35	0.20	TO-240AA (e)
MDMA85P1200TG	1200									
MDMA85P1600TG	1600									
MDMA85P1800TG	1800									
MDNA85P2200TG	2200									

Diodes Modules—Dual

$I_{FAV} = 99\text{--}300\text{ A}$

Part Number	V_{RRM}	I_{FAV}	T_C	I_{FSM} 45 °C 10 ms	V_{F0}	r_F	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	°C	A	V	mΩ	°C	K/W	K/W	
MDD72-08N1B	800	99	100	1700	0.80	2.30	150	0.35	0.20	TO-240AA (e)
MDD72-12N1B	1200									
MDD72-14N1B	1400									
MDD72-16N1B	1600	99	100	1700	0.80	2.30	150	0.35	0.20	TO-240AA (e)
MDD72-18N1B	1800									
MDMA110P1200TG	1200									
MDMA110P1600TG	1600	110	100	2000	0.82	2.80	150	0.3	0.20	TO-240AA (e)
MDMA110P1800TG	1800									
MDNA110P2200TG	2200									
MDD95-08N1B	800	120	100	2800	0.75	1.95	150	0.26	0.20	TO-240AA (e)
MDD95-12N1B	1200									
MDD95-14N1B	1400									
MDD95-16N1B	1600	120	100	2800	0.75	1.95	150	0.26	0.20	TO-240AA (e)
MDD95-18N1B	1800									
MDD95-20N1B	2000									
MDD95-22N1B	2200	120	100	2800	0.75	1.95	150	0.26	0.20	TO-240AA (e)
MDA95-22N1B	2200									
MDMA140P1200TG	1200									
MDMA140P1600TG	1600	140	100	2800	0.78	2.20	150	0.23	0.20	TO-240AA (e)
MDMA140P1800TG	1800									
MDNA140P2200TG	2200									
MDD142-08N1	800	165	100	4700	0.80	1.30	150	0.21	0.10	Y4
MDD142-12N1	1200									
MDD142-14N1	1400									
MDD142-16N1	1600	165	100	4700	0.80	1.30	150	0.21	0.10	Y4
MDD142-18N1	1800									
MDMA180P1600YD	1600									
MDNA180P2200YD	2200	180	100	4400	0.77	1.40	150	0.2	0.11	Y4
MDD172-08N1	800									
MDD172-12N1	1200									
MDD172-14N1	1400	190	100	6600	0.80	0.80	150	0.21	0.10	Y4
MDD172-16N1	1600									
MDD172-18N1	1800									
MDMA210P1600YD	1600	210	100	6600	0.67	1.20	150	0.17	0.09	Y4
MDNA210P2200YD	2200									
MDD200-14N1	1400									
MDD200-16N1	1600	224	100	10500	0.8	0.60	150	0.13	0.10	Y4
MDD200-18N1	1800									
MDD200-22N1	2200									
MDMA200P1600SA	1600	200	110	6000	0.76	1.40	150	0.15	0.08	SimBus A
MDD175-28N1	2800	240	100	8500	0.74	1.27	150	0.14	0.04	Y1
MDD175-34N1	3400									
MDD255-12N1	1200									
MDD255-14N1	1400	270	100	9500	0.80	0.60	150	0.14	0.04	Y1
MDD255-16N1	1600									
MDD255-18N1	1800									
MDD255-20N1	2000	270	100	9500	0.80	0.60	150	0.14	0.04	Y1
MDD255-22N1	2200									
MDMA280P1600YD	1600									
MDNA280P2200YD	2200	280	100	10500	0.74	1.00	150	0.13	0.06	Y4
MDMA300P1600PTSF	1600									
MDNA300P2200PTSF	2200									

Rectifier Modules




X027a
SOT-227B (miniBLOC)



X125b
TO-240AA



X125d
TO-240AA



X129c
Y2




X131c
Y1



X132b
Y1




X142c
ComPack




X143a
SimBus A F PFP

Diode Modules—Single and Dual

$I_{FAV} = 350\text{--}700\text{ A}$



MDO




**MDD...
MDM/NA...P..**


Part Number	V_{RRM}	I_{FAV}	T_C	$I_{FSM} 45^\circ\text{C } 10\text{ ms}$	V_{F0}	r_F	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
MDD310-12N1	1200	305	100	11500	0.75	0.63	150	0.129	0.04	Y2
MDD310-14N1	1400									
MDD310-16N1	1600									
MDD310-18N1	1800	305	100	11500	0.75	0.63	150	0.129	0.04	Y2
MDD310-20N1	2000									
MDD310-22N1	2200									
MDD312-12N1	1200	310	100	10500	0.80	0.60	150	0.12	0.04	Y1
MDD312-14N1	1400									
MDD312-16N1	1600									
MDD312-18N1	1800	310	100	10500	0.80	0.60	150	0.12	0.04	Y1
MDD312-20N1	2000									
MDD312-22N1	2200									
MDMA380P1600KC	1600	380	100	11000	0.75	0.53	150	0.11	0.04	Y1
MDMA380P1800KC	1800									
MDNA380P2200KC	2200									
MDMA425P1600PTSF	1600	425	100	10000	0.77	1.01	150	0.07	0.04	SimBus F PFP
MDNA425P2200PTSF	2200									
MDO500-12N1	1200	560	85	15000	0.80	0.38	140	0.072	0.02	Y1
MDO500-14N1	1400									
MDO500-16N1	1600	560	85	15000	0.80	0.38	140	0.072	0.02	Y1
MDO500-18N1	1800									
MDO500-20N1	2000	560	85	15000	0.80	0.38	140	0.072	0.02	Y1
MDO500-22N1	2200									
MDMA600P1600PTSF	1600	600	100	15000	0.78	0.67	150	0.05	0.03	SimBus F PFP
MDNA600P2200PTSF	2200									
MDO600-16N1	1600	608	85	15000	0.76	0.32	140	0.072	0.02	Y1
MDMA700P1600CC	1600									
MDMA700P1800CC	1800									
MDNA700P2200CC	2200	700	100	20000	0.78	0.35	150	0.055	0.02	ComPack

Thyristor/Diode Modules

$I_{TAV} = 25-85\text{ A}$



MCD...io1
MCM/NA...PD...



MCD...io8/...io6
CLA/CMA...PD...

Part Number	V_{RRM} V_{DRM}	I_{TAV}	T_C	$I_{T(RMS)}$	$I_{TSM} 45^\circ\text{C } 10\text{ ms}$	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
MCMA25PD1200TB	1200	25	82	40	400	0.87	13.00	140	1.20	0.20	TO-240AA (b)
MCMA25PD1600TB	1600										
MCD26-08io1B	800	27	85	50	520	0.85	11.00	125	0.88	0.20	TO-240AA (b)
MCD26-12io1B	1200										
MCD26-14io1B	1400	27	85	50	520	0.85	11.00	125	0.88	0.20	TO-240AA (b)
MCD26-16io1B	1600										
MCD26-08io8B	800	27	85	50	520	0.85	11.00	125	0.88	0.20	TO-240AA (d)
MCD26-12io8B	1200										
MCD26-14io8B	1400	27	85	50	520	0.85	11.00	125	0.88	0.20	TO-240AA (d)
MCD26-16io8B	1600										
MCMA35PD1200TB	1200	35	85	55	520	0.87	9.80	140	0.90	0.20	TO-240AA (b)
MCMA35PD1600TB	1600										
MCD40-12io6	1200	40	85	63	500	0.87	10.50	150	0.70	0.10	SOT-227B (miniBLOC)
MCD40-16io6	1600										
MCD44-08io1B	800	49	85	77	1150	0.85	5.30	125	0.53	0.20	TO-240AA (b)
MCD44-12io1B	1200										
MCD44-14io1B	1400	49	85	77	1150	0.85	5.30	125	0.53	0.20	TO-240AA (b)
MCD44-16io1B	1200										
MCD44-18io1B	1600	49	85	77	1150	0.85	5.30	125	0.53	0.20	TO-240AA (d)
MCD44-08io8B	800										
MCD44-12io8B	1200	49	85	77	1150	0.85	5.30	125	0.53	0.20	TO-240AA (d)
MCD44-14io8B	1400										
MCD44-16io8B	1600	49	85	77	1150	0.85	5.30	125	0.53	0.20	TO-240AA (d)
MCD44-18io8B	1800										
MCNA40PD2200TB	2200	40	85	63	500	0.84	11.40	140	0.70	0.20	TO-240AA (b)
MCMA50PD1200TB	1200	50	85	79	800	0.89	5.30	140	0.70	0.20	TO-240AA (b)
MCMA50PD1600TB	1600										
CLA60PD1200NA	1200	60	100	94	1100	0.79	4.80	150	0.55	0.10	SOT-227B (miniBLOC)
MCD56-08io1B	800	60	85	100	1500	0.85	3.70	125	0.45	0.20	TO-240AA (b)
MCD56-12io1B	1200										
MCD56-14io1B	1400	60	85	100	1500	0.85	3.70	125	0.45	0.20	TO-240AA (b)
MCD56-16io1B	1600										
MCD56-18io1B	1800	60	85	100	1500	0.85	3.70	125	0.45	0.20	TO-240AA (d)
MCD56-08io8B	800										
MCD56-12io8B	1200	60	85	100	1500	0.85	3.70	125	0.45	0.20	TO-240AA (d)
MCD56-14io8B	1400										
MCD56-16io8B	1600	60	85	100	1500	0.85	3.70	125	0.45	0.20	TO-240AA (d)
MCD56-18io8B	1800										
MCNA55PD2200TB	2200	55	85	86	800	0.9	9.00	150	0.50	0.20	TO-240AA (b)
MCMA65PD1200TB	1200	65	85	105	1150	0.85	4.80	140	0.50	0.20	TO-240AA (b)
MCMA65PD1600TB	1600										
MCMA65PD1800TB	1800	80	80	126	1070	0.86	5.50	150	0.45	0.10	SOT-227B (miniBLOC)
CMA80PD1600NA	1600										
MCD72-08io1B	800	85	85	180	1700	0.85	3.20	125	0.30	0.20	TO-240AA (b)
MCD72-12io1B	1200										
MCD72-14io1B	1400	85	85	180	1700	0.85	3.20	125	0.30	0.20	TO-240AA (b)
MCD72-16io1B	1600										
MCD72-18io1B	1800	85	85	180	1700	0.85	3.20	125	0.30	0.20	TO-240AA (d)
MCD72-08io8B	800										
MCD72-12io8B	1200	85	85	180	1700	0.85	3.20	125	0.30	0.20	TO-240AA (d)
MCD72-14io8B	1400										
MCD72-16io8B	1600	85	85	180	1700	0.85	3.20	125	0.30	0.20	TO-240AA (d)
MCD72-18io8B	1800										

Rectifier Modules



X125b
TO-240AA



X125d
TO-240AA



X125y
TO-240AA




X126b
Y4



X027a
SOT-227B (miniBLOC)



X129b
Y2




X132b
Y1



X141b
SimBus A




X142b
ComPack




X143a
SimBus A F PFP

Thyristor/Diode Modules

$I_{TAV} = 85-140\text{ A}$



MCD...io1
MCM/NA...PD...



MCD...io8/...io6
CLA/CMA...PD...


Part Number	V_{RRM} V_{DRM}	I_{TAV}	T_C	$I_{T(RMS)}$	$I_{TSM} 45^\circ\text{C } 10\text{ ms}$	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
MCNA75PD2200TB	2200	75	85	118	1050	0.90	6.50	140	0.38	0.20	TO-240AA (b)
MCMA85PD1200TB	1200	85	85	135	1500	0.85	3.90	140	0.38	0.20	TO-240AA (b)
MCMA85PD1600TB	1600										
MCMA85PD1800TB	1800										
CLA100PD1200NA	1200	100	85	150	1500	0.83	3.70	150	0.35	0.10	SOT-227B (miniBLOC)
MCD94-20io1B	2000	104	85	180	1700	0.85	3.20	125	0.22	0.20	TO-240AA (b)
MCD94-22io1B	2200										
MCD95-08io1B	800										
MCD95-12io1B	1200	116	85	180	2250	0.85	2.40	125	0.22	0.20	TO-240AA (b)
MCD95-14io1B	1400										
MCD95-16io1B	1600										
MCD95-18io1B	1800	116	85	180	2250	0.85	2.40	125	0.22	0.20	TO-240AA (b)
MCD95-16io1	1600										
MCD95-08io8B	800										
MCD95-12io8B	1200	116	85	180	2250	0.85	2.40	125	0.22	0.20	TO-240AA (d)
MCD95-14io8B	1400										
MCD95-16io8B	1600										
MCD95-18io8B	1800	116	85	180	2250	0.85	2.40	125	0.22	0.20	TO-240AA (d)
MCNA95PD2200TB	2200										
MCMA110PD1200TB	1200	110	85	170	1900	0.85	3.30	140	0.30	0.20	TO-240AA (b)
MCMA110PD1600TB	1600										
MCMA110PD1800TB	1800										
MCNA120PD2200TB	2200	120	85	190	1700	0.90	3.70	140	0.22	0.20	TO-240AA (b)
MCNA120PD2200TB-NI	2200	120	85	190	1700	0.90	3.70	140	0.22	0.20	TO-240AA (y)
MCD132-08io1	800	130	85	300	4750	0.80	1.50	125	0.23	0.10	Y4
MCD132-12io1	1200										
MCD132-14io1	1400										
MCD132-16io1	1600	130	85	300	4750	0.80	1.50	125	0.23	0.10	Y4
MCD132-18io1	1800										
MCMA140PD1200TB	1200										
MCMA140PD1600TB	1600	140	85	200	2400	0.85	2.80	140	0.22	0.20	TO-240AA (b)
MCMA140PD1800TB	1800										
MCMA140PD1600TB-NI	1600										

Thyristor/Diode Modules

$I_{TAV} = 180\text{--}700\text{ A}$

Part Number	V_{RRM} V_{DRM}	I_{TAV}	T_C	$I_{T(RMS)}$	$I_{TSM} 45^\circ\text{C } 10\text{ ms}$	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
MCNA150PD2200YB	2200	150	85	235	4300	0.86	2.10	140	0.210	0.11	Y4
MCD161-20io1	2000	165	85	300	6000	0.80	1.60	125	0.155	0.07	Y4
MCD161-22io1	2200										
MCD162-08io1	800	181	85	300	6000	0.88	1.15	125	0.155	0.07	Y4
MCD162-12io1	1200										
MCD162-14io1	1400	181	85	300	6000	0.88	1.15	125	0.155	0.07	Y4
MCD162-16io1	1600										
MCD162-18io1	1800										
MCNA180PD2200YB	2200										
MCMA200PD1600SA	1600	200	85	314	6000	0.81	1.60	140	0.150	0.08	SimBus A
MCD200-14io1	1400	216	85	340	8000	0.80	1.40	125	0.130	0.05	Y4
MCD200-16io1	1600										
MCD200-18io1	1800										
MCNA220PD2200YB	2200	220	85	345	7200	0.84	1.50	140	0.130	0.07	Y4
MCD224-20io1	2000	240	85	400	8000	0.80	0.76	130	0.139	0.04	Y1
MCD224-22io1	2200										
MCD225-12io1	1200	221	85	400	8000	0.80	0.76	130	0.157	0.04	Y1
MCD225-14io1	1400										
MCD225-16io1	1600	221	85	400	8000	0.80	0.76	130	0.157	0.04	Y1
MCD225-18io1	1800										
MCNA250PD2200PTSF	2200										
MCD255-12io1	1200	250	85	450	9000	0.80	0.68	130	0.140	0.04	Y1
MCD255-14io1	1400										
MCD255-16io1	1600										
MCD255-18io1	1800										
MCMA260PD1600YB	1600	260	85	408	8300	0.81	1.23	140	0.130	0.08	Y4
MCMA260PD1800YB	1800										
MCMA265PD1600KB	1600										
MCMA265PD1800KB	1800	260	85	408	8500	0.80	0.75	140	0.160	0.04	Y1
MCMA280PD1600PTSF	1600										
MCD310-08io1	800	320	85	500	9200	0.80	0.82	140	0.112	0.04	Y2
MCD310-12io1	1200										
MCD310-14io1	1400										
MCD310-16io1	1600	320	85	500	9200	0.80	0.82	140	0.112	0.04	Y2
MCD310-18io1	1800										
MCD310-20io1	2000										
MCD310-22io1	2200										
MCD312-12io1	1200	320	85	520	9200	0.80	0.68	140	0.120	0.04	Y1
MCD312-14io1	1400										
MCD312-16io1	1600	320	85	520	9200	0.80	0.68	140	0.120	0.04	Y1
MCD312-18io1	1800										
MCNA360PD2200PTSF	2200	360	85	570	8400	0.74	1.57	150	0.070	0.04	SimBUS F PFP
MCMA400PD1600PTSF	1600	400	85	630	10000	0.82	1.14	150	0.070	0.04	SimBUS F PFP
MCNA500PD2200PTSF	2200	500	85	790	11000	0.75	1.11	150	0.050	0.03	SimBUS F PFP
MCMA550PD1600PTSF	1600	550	85	864	13000	0.82	0.80	150	0.050	0.03	SimBUS F PFP
MCNA650PD2200CB	2200	700	85	1020	16000	0.75	0.63	140	0.045	0.02	ComPack
MCMA700PD1600CB	1600										
MCMA700PD1800CB	1800										

Rectifier Modules



X103
V1-A-Pack



X125c
TO-240AA




X126a
Y4




X125a
TO-240AA



X125z
TO-240AA



MCC...io1B
MCM/NA...P...



MCC...io8B

Thyristor Modules – Dual

$I_{TAV} = 18-60\text{ A}$

Part Number	V_{RRM} V_{DRM}	I_{TAV}	T_C	$I_{T(RMS)}$	$I_{TSM} 45^\circ\text{C } 10\text{ ms}$	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
MCC19-08io1B	800	18	85	40	400	0.85	18	125	1.300	0.2	TO-240AA (a)
MCC19-12io1B	1200										
MCC19-14io1B	1400										
MCC19-16io1B	1600										TO-240AA (a)
MCC19-08io8B	800	18	85	40	400	0.85	18	125	1.300	0.2	TO-240AA (c)
MCC19-12io8B	1200										
MCC19-14io8B	1400										TO-240AA (c)
MCC19-16io8B	1600										
MCC21-08io8B	800	21	85	33	320	0.85	15	125	1.100	0.2	TO-240AA (c)
MCC21-12io8B	1200										
MCC21-14io8B	1400										TO-240AA (c)
MCC21-16io8B	1600										
MCMA25P1200TA	1200	25	85	40	400	0.87	13	140	1.200	0.2	TO-240AA (a)
MCMA25P1600TA	1600										
MCC26-08io1B	800										TO-240AA (a)
MCC26-12io1B	1200										
MCC26-14io1B	1400	27	85	50	520	0.85	11	125	0.880	0.2	TO-240AA (a)
MCC26-16io1B	1600										
MCC26-14io1	1400										TO-240AA (z)
MCC26-08io8B	800										
MCC26-12io8B	1200	27	85	50	520	0.85	11	125	0.880	0.2	TO-240AA (c)
MCC26-14io8B	1400										
MCC26-16io8B	1600										TO-240AA (c)
MCMA35P1200TA	1200	35	85	55	520	0.87	9.8	140	0.900	0.2	TO-240AA (a)
MCMA35P1600TA	1600										
MCNA40P2200TA	2200										TO-240AA (a)
MCC44-08io1B	800	49	85	77	1150	0.85	5.3	125	0.530	0.2	TO-240AA (a)
MCC44-12io1B	1200										
MCC44-14io1B	1400										
MCC44-16io1B	1600										TO-240AA (a)
MCC44-18io1B	1800	49	85	77	1150	0.85	5.3	125	0.530	0.2	TO-240AA (c)
MCC44-08io8B	800										
MCC44-12io8B	1200										
MCC44-14io8B	1400										TO-240AA (c)
MCC44-16io8B	1600	49	85	77	1150	0.85	5.3	125	0.530	0.2	TO-240AA (c)
MCC44-18io8B	1800										
MCMA50P1200TA	1200										TO-240AA (a)
MCMA50P1600TA	1600	50	85	79	800	0.89	5.3	140	0.700	0.2	TO-240AA (a)
MCNA55P2200TA	2200										
MCC56-08io1B	800										TO-240AA (a)
MCC56-12io1B	1200	60	85	100	1500	0.85	3.7	125	0.450	0.2	TO-240AA (a)
MCC56-14io1B	1400										
MCC56-16io1B	1600										TO-240AA (a)
MCC56-18io1B	1800										
MCC56-14io1	1400	60	85	100	1500	0.85	3.7	125	0.450	0.2	TO-240AA (z)

Thyristor Modules – Dual

$I_{TAV} = 60 - 181 \text{ A}$




MCC...io1B
MCM/NA...P...



MCC...io8B

Part Number	$V_{RRM} V_{DRM}$	I_{TAV}	T_C	$I_{T(RMS)}$	$I_{TSM} 45^\circ\text{C } 10 \text{ ms}$	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
MCC56-08io8B	800	60	85	100	1500	0.85	3.7	125	0.450	0.2	TO-240AA (c)
MCC56-12io8B	1200										
MCC56-14io8B	1400										
MCC56-16io8B	1600										
MCC56-18io8B	1800	60	85	100	1500	0.85	3.7	125	0.450	0.2	TO-240AA (c)
MCMA65P1200TA	1200										
MCMA65P1600TA	1600										
MCMA65P1800TA	1800										
MCC72-08io1B	800	85	85	180	1700	0.85	3.2	125	0.300	0.2	TO-240AA (a)
MCC72-12io1B	1200										
MCC72-14io1B	1400										
MCC72-16io1B	1600										
MCC72-18io1B	1800	85	85	180	1700	0.85	3.2	125	0.300	0.2	TO-240AA (a)
MCC72-08io8B	800										
MCC72-12io8B	1200										
MCC72-14io8B	1400										
MCC72-16io8B	1600	85	85	180	1700	0.85	3.2	125	0.300	0.2	TO-240AA (c)
MCC72-18io8B	1800										
MCNA75P2200TA	2200										
MCMA85P1200TA	1200										
MCMA85P1600TA	1600	85	85	135	1500	0.85	3.9	140	0.380	0.2	TO-240AA (a)
MCMA85P1800TA	1800										
MCC94-20io1B	2000										
MCC94-22io1B	2200										
MCC94-24io1B	2400	104	85	180	1700	0.85	3.2	125	0.220	0.2	TO-240AA (a)
MCC95-08io1B	800										
MCC95-12io1B	1200										
MCC95-14io1B	1400										
MCC95-16io1B	1600	116	85	180	2250	0.83	2.4	125	0.220	0.2	TO-240AA (a)
MCC95-18io1B	1800										
MCC95-14io1	1400										
MCC95-16io1	1600										
MCC95-08io8B	800	116	85	180	2250	0.85	2.4	125	0.220	0.2	TO-240AA (c)
MCC95-12io8B	1200										
MCC95-14io8B	1400										
MCC95-16io8B	1600										
MCC95-18io8B	1800	116	85	180	2250	0.85	2.4	125	0.220	0.2	TO-240AA (c)
MCNA95P2200TA	2200										
MCMA110P1200TA	1200										
MCMA110P1600TA	1600										
MCMA110P1800TA	1800	110	85	170	1900	0.85	3.3	140	0.300	0.2	TO-240AA (a)
MCMA110P1600VA	1600										
MCNA120P2200TA	2200										
MCMA140P1200TA	1200										
MCMA140P1400TA	1400	140	85	220	2400	0.85	2.8	140	0.220	0.2	TO-240AA (a)
MCMA140P1600TA	1600										
MCMA140P1800TA	1800										
MCC132-08io1	800										
MCC132-12io1	1200	130	85	300	4750	0.8	1.5	125	0.230	0.1	Y4
MCC132-14io1	1400										
MCC132-16io1	1600										
MCC132-18io1	1800										
MCNA150P2200YA	2200	150	85	235	4300	0.86	2.1	140	0.210	0.11	Y4
MCMA160P1600YA	1600										
MCMA160P1800YA-MI	1800										
MCC161-20io1	2000										
MCC161-22io1	2200	165	85	300	6000	0.80	1.6	125	0.155	0.07	Y4
MCC162-08io1	800										
MCC162-12io1	1200										
MCC162-14io1	1400										
MCC162-16io1	1600	181	85	300	6000	0.88	1.15	125	0.155	0.07	Y4
MCC162-18io1	1800										

Rectifier Modules



X102
ECO-PAC 2



X027a
SOT-227B (miniBLOC)



X141a
SimBus A



X126a
Y4



X131a
Y1




X142a
ComPack



X129a
Y2




X132a
Y1-2-Cu




X143a
SimBus A F PFP

Thyristor Modules – Dual

$I_{TAV} = 180 - 700 \text{ A}$



MCC...io8B




MCC...io1B
MCM/NA...P...


Part Number	$V_{RRM} V_{DRM}$	I_{TAV}	T_C	$I_{T(RMS)}$	$I_{TSM} 45^\circ\text{C } 10 \text{ ms}$	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
MCNA180P2200YA	2200	180	85	280	5400	0.85	1.8	140	0.170	0.09	Y4
MCMA200P1600SA	1600	200	90	314	6000	0.81	1.6	140	0.150	0.08	SimBus A
MCMA200P1600YA	1600	200	85	315	6000	0.83	1.43	140	0.170	0.09	Y4
MCMA200P1800YA-MI	1800										
MCC200-14io1	1400	216	85	340	8000	0.80	1.4	125	0.130	0.05	Y4
MCC200-16io1	1600										
MCC200-18io1	1800										
MCK200-18io1	1800	216	85	340	8000	0.80	1.4	125	0.130	0.05	Y4
MCNA220P2200YA	2200	220	85	345	7200	0.84	1.5	140	0.130	0.07	Y4
MCC224-20io1	2000	240	85	400	8000	0.80	0.76	130	0.139	0.04	Y1
MCC224-22io1	2200										
MCC224-24io1	2400										
MCC225-12io1	1200	221	85	400	8000	0.80	0.76	130	0.157	0.04	Y1
MCC225-14io1	1400										
MCC225-16io1	1600										
MCC225-18io1	1800	221	85	400	8000	0.80	0.76	130	0.157	0.04	Y1
MCNA250P2200PTSF	2200	250	85	400	5900	0.76	2.2	150	0.100	0.05	SimBus F PFP
MCC255-12io1	1200	250	85	450	9000	0.80	0.68	130	0.140	0.04	Y1
MCC255-14io1	1400										
MCC255-16io1	1600										
MCC255-18io1	1800	250	85	450	9000	0.80	0.68	130	0.140	0.04	Y1
MCMA260P1600YA	1600	260	85	408	8300	0.81	1.23	140	0.130	0.08	Y4
MCMA260P1800YA	1800										
MCMA265P1600KA	1600										
MCMA265P1800KA	1800	260	85	408	8500	0.80	0.75	140	0.160	0.04	Y1
MCMA280P1600PTSF	1600	280	85	440	7000	0.83	1.57	150	0.100	0.05	SimBus F PFP
MCC310-08io1	800	320	85	500	9200	0.80	0.82	140	0.112	0.04	Y2
MCC310-12io1	1200										
MCC310-14io1	1400										
MCC310-16io1	1600	320	85	500	9200	0.80	0.82	140	0.112	0.04	Y2
MCC310-18io1	1800										
MCC312-12io1	1200										
MCC312-14io1	1400	320	85	520	9200	0.80	0.68	140	0.120	0.04	Y1
MCC312-16io1	1600										
MCC312-18io1	1800										
MCNA360P2200PTSF	2200	360	85	570	8400	0.74	1.57	150	0.070	0.04	SimBus F PFP
MCMA400P1600PTSF	1600	400	85	630	10000	0.82	1.14	150	0.070	0.04	SimBus F PFP
MCNA500P2200PTSF	2200	500	85	790	11000	0.75	1.11	150	0.050	0.03	SimBus F PFP
MCMA550P1600PTSF	1600	550	85	860	13000	0.82	0.8	150	0.050	0.03	SimBus F PFP
MCNA650P2200CA	2200	700	85	1020	16000	0.75	0.63	140	0.045	0.02	ComPack
MCMA700P1600CA	1600										
MCMA700P1800CA	1800										
MCMA700P1600NCA	1600	700	85	1100	19000	0.82	0.4	140	0.050	0.02	ComPack
MCMA700P1800NCA	1800										

Thyristor Modules – Single

$I_{TAV} = 32 - 600 \text{ A}$



VCO...





MCO

Part Number	$V_{RRM} V_{DRM}$	I_{TAV}	T_C	$I_{T(RMS)}$	$I_{TSM} 45^\circ\text{C } 10 \text{ ms}$	V_{TO}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Package
	V	A	$^\circ\text{C}$	A	A	V	$\text{m}\Omega$	$^\circ\text{C}$	K/W	K/W	
MCO25-12io1	1200	32	80	50	370	0.86	13.9	150	1.100	0.30	SOT-227B (miniBLOC)
MCO25-16io1	1600										
MCO50-12io1	1200	57	80	90	740	0.88	6.00	150	0.720	0.20	SOT-227B (miniBLOC)
MCO50-16io1	1600										
MCO75-12io1	1200	80	80	125	1070	0.85	5.50	150	0.450	0.10	SOT-227B (miniBLOC)
MCO75-16io1	1600										
MCO100-12io1	1200	101	80	160	1400	0.85	4.50	150	0.350	0.10	SOT-227B (miniBLOC)
MCO100-16io1	1600										
VCO132-12io7	1200	130	85	200	3600	0.80	1.65	150	0.250	0.10	ECO-PAC 2
VCO132-16io7	1600										
MCO150-12io1	1200	158	80	250	2000	0.84	3.50	150	0.200	0.10	SOT-227B (miniBLOC)
MCO150-16io1	1600										
VCO180-12io7	1200	180	90	280	4500	0.75	1.23	150	0.170	0.06	ECO-PAC 2
VCO180-16io7	1600										
MCO450-20io1	2000	464	85	750	15000	0.77	0.42	130	0.072	0.02	Y1-2-Cu
MCO450-22io1	2200										
MCO500-12io1	1200	560	85	880	17000	0.80	0.38	140	0.072	0.02	Y1-2-Cu
MCO500-14io1	1400										
MCO500-16io1	1600	560	85	880	17000	0.80	0.38	140	0.072	0.02	Y1-2-Cu
MCO500-18io1	1800										
MCO600-16io1	1600	600	85	940	15000	0.81	0.40	140	0.065	0.02	Y1-2-Cu
MCO600-18io1	1800										
MCO600-20io1	2000	600	85	940	15000	0.81	0.40	140	0.065	0.02	Y1-2-Cu
MCO600-22io1	2200										

Rectifier Modules

Optional Accessories for Thyristor Diode Modules

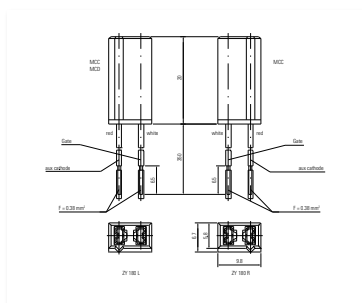



For module type Y1, Y2, Y4 and ComPACK MCC/MCD/MCO/MCMA/MCNA 132, 161 up to 700 (for MCD/MCO only Left-Type):

Keyed gate cathode twin plugs with wire length = 350/480 mm gate = white, cathode = red

Type ZY180Lx (L = left for pin pair 4/5)

Type ZY180Rx (R = right for pin pair 6/7)

Part Number	Description
ZY180L350	Left plug + cable – Length 350 mm
ZY180L480	Left plug + cable – length 480 mm
ZY180LM	Left plug only
ZY180R350	Right plug + cable – length 350 mm
ZY180R480	Right plug + cable – length 480 mm
ZY180RM	Right plug only

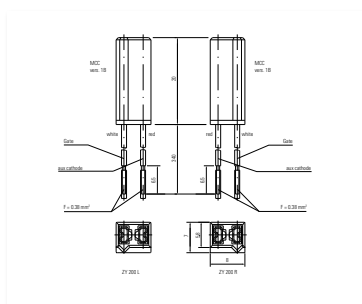

For module type TO-240 package MCC/MCD/CMA/MCNA 19 Up to 120 and 140 (version 1):

Keyed gate cathode twin plugs with wire length = 340/460 mm; gate = white, cathode = red

Type ZY200Lx (L = left for pin pair 4/5)

Type ZY200Rx (R = right for pin pair 6/7)

Part Number	Description
ZY200L340	Left plug + cable – length 340 mm
ZY200L460	Left plug + cable – length 460 mm
ZY200LM	Left plug only
ZY200R340	Right plug + cable – length 340 mm
ZY200R460	Right plug + cable – length 460 mm
ZY200RM	Right plug only

For ZY180 and ZY200: UL 758 Style 3751

Design Information

For Thyristors, Diodes, Thyristor Diode Modules, and Rectifier Bridges

Surge current

The 60 Hz value of I_{TSM} is 10% higher than the 50 Hz value. The I_{TSM} value at T_{VJM} is 10% to 15% lower than the 45 °C value.

Limiting I^2t

50 Hz: $I^2t [A^2s] = I_{TSM} [A] \cdot I_{TSM} [A] \cdot 0.005 [s]$; use rated I_{TSM} value (10 ms). 60 Hz: $I^2t [A^2s] = I_{TSM} [A] \cdot I_{TSM} [A] \cdot 0.0042 [s]$; use 60-Hz-value of I_{TSM} .

Forward current


The average current ratings in tables are mostly specified for temperature conditions of $T_A = 45\text{ °C}$, $T_C = 85\text{ °C}$, or $T_C = 100\text{ °C}$. For other temperature conditions, the current ratings can be calculated using the following formulas, which are applicable up to 400 Hz.

$$I_{TAV} = \frac{-V_{T0} = \sqrt{V_{T0}^2 + 4 \cdot k^2 \cdot r_T \cdot P}}{2 \cdot k^2 \cdot r_T} \quad \text{where} \quad P = \frac{T_{VJM} - T_C}{R_{thJC}} \quad \text{or} \quad P = \frac{T_{VJM} - T_A}{R_{thJA}}$$


$$I_{TAV} [A], P [W]; V_{T0} [V]; r_T [W], T_{VJM} [^{\circ}C], T_C [^{\circ}C], T_A [^{\circ}C], R_{thJC} [K/W], R_{thJA} [K/W]$$

- $k^2 = 1$ for DC current
- $k^2 = 2.5$ for sinusoidal half wave current
- $k^2 = 3$ for 120° rectangular current
- $k^2 = 6$ for 60° rectangular current

The average forward current is limited by the RMS current value $I_{T(RMS)}$. When the calculated value I_{TAV} is higher than $I_{T(RMS)} / k$, replace it with $I_{TAV} = I_{T(RMS)} / k$.




X101
ECO-PAC 1



X102
ECO-PAC 2




X103
V1-A-Pack




X024a
ISOPLUS i4-PAC™




X027a
SOT-227B (miniBLOC)



X030a
SMPD -B



1-phase, B2U



3-phase, B6U

Rectifier Bridges with Fast Diodes

Part Number	V _{RRM}	I _{dAV}	@T _C	I _{FSM} 45 °C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thCH}	Package
	V	A	°C	A	V	mΩ	°C	K/W	K/W	
1-phase, B2U										
VBE17-06NO7	600	27	85	50	1.18	22.0	150	2.50	0.30	ECO-PAC 1
VBE17-12NO7	1200	19	85	40	1.32	30.0	150	2.50	0.30	ECO-PAC 1
VBE26-06NO7	600	44	85	110	1.13	13.0	150	1.60	0.30	ECO-PAC 1
VBE26-12NO7	1200	32	85	90	1.32	30.0	150	1.60	0.30	ECO-PAC 1
VBE55-06NO7	600	68	100	250	0.98	8.0	150	0.90	0.30	ECO-PAC 1
VBE55-12NO7	1200	59	85	200	1.31	15.0	150	0.90	0.30	ECO-PAC 1
VBE60-06A	600	60	100	250	0.98	8.20	150	1.15	0.10	SOT-227B (miniBLOC)
VBE60-12A	1200	60	70	200	1.31	14.0	150	1.15	0.10	SOT-227B (miniBLOC)
DHG40B1200LB	1200	34	80	150	1.35	42.0	175	1.50	0.50	SMPD-B
DPG60B600LB	600	60	100	250	0.85	17.0	175	1.10	0.40	SMPD-B
FBE22-06N1	600	22	115	50	1.04	24.0	175	3.00	0.20	ISOPLUS i4-PAC™
VBE100-06NO7	600	100	85	600	1.09	4.3.0	150	0.80	0.20	ECO-PAC 2
VBE100-12NO7	1200	100	70	500	1.07	8.20	150	0.80	0.20	ECO-PAC 2
DCG20B650LB *	650	21	80	250	0.74	118.0	175	2.10	0.70	SMPD-B
3-phase, B6U										
DHG60U1200LB	1200	60	80	200	1.35	2.90	150	1.20	0.40	SMPD-B
VUE50-12NO1	1200	50	85	200	1.65	18.20	150	1.20	0.30	V1-A-Pack
VUE22-06NO7	600	34	85	50	1.18	22.0	150	2.50	0.30	ECO-PAC 1
VUE22-12NO7	1200	24	85	40	1.39	55.0	150	2.50	0.30	ECO-PAC 1
VUE35-06NO7	600	56	85	110	1.13	13.0	150	1.60	0.30	ECO-PAC 1
VUE35-12NO7	1200	40	85	90	1.32	30.0	150	1.60	0.30	ECO-PAC 1
VUE75-06NO7	600	86	100	250	0.98	8.0	150	0.90	0.30	ECO-PAC 1
VUE75-12NO7	1200	74	85	200	1.31	15.0	150	0.90	0.30	ECO-PAC 1
FUE30-12N1	1200	30	120	90	0.97	48.0	175	2.30	0.20	ISOPLUS i4-PAC™
VUE130-06NO7	600	130	85	600	1.09	4.30	150	0.80	0.20	ECO-PAC 2
VUE130-12NO7	1200	130	70	500	1.07	8.20	150	0.80	0.20	ECO-PAC 2


* SiC-Diodes

Rectifier Bridges Incorporating Fast Diodes


Power-switching semiconductors, commonly used in inverters, employ a DC-Link stage where high switching frequencies can introduce harmonics and line distortion. New designs must minimize these effects and comply with EMI/EMC VDE 0871 and other standards.

Noise level can be reduced by up to 10 dB when the input rectifier uses semi-fast diodes optimized for turn off, resulting in lower peak recovery current compared to standard rectifier diodes. Additional noise level reductions of up to 5 dB can be achieved by using rectifier bridges equipped with fast recovery epitaxial diodes (FRED) such as module types VBE (single phase bridge) and VUE (three phase bridge). While these options may increase costs, they may be necessary to fulfill VDE and other standards. The improvement in diode performance directly effects the EMI filter network design, which can further reduce the size and cost of the included capacitors and inductors.


Rectifier Modules



X024a
ISOPLUS i4-PAC™



X025a
GBFP



X030a
SMPD -B



X027a
SOT-227B (miniBLOC)



X101
ECO-PAC 1



X102
ECO-PAC 2



X116b
FO-B




X103
V1-A-Pack



X122b
PWS-D



X123e
PWS-E



Single-Phase, B2U

Single-Phase Rectifier Bridges

Part Number	V _{RRM}	V _{VRMS}	I _{dAV}	@T _C	I _{FSM} 45 °C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thJH}	P _{RSM}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	kW	
1 Phase Rectifier Bridges with Standard Diodes, B2U												
FBO16-12N	1200	400	20	130	150	0.81	32.00	175	3.00	3.20	–	ISOPLUS i4-PAC™
VBO21-08NO7	800	250	20	115	120	0.84	28.80	150	2.50	2.90	–	ECO-PAC 1
VBO21-12NO7	1200	400										
VBO22-08NO8	800	250	14	85	380	0.77	14.20	150	8.00	9.00	–	FO-B
VBO22-12NO8	1200	400										
VBO22-16NO8	1600	500	14	85	380	0.77	14.20	150	8.00	9.00	–	FO-B
VBO22-18NO8	1800	575										
GBO25-12NO1	1200	400	25	105	370	0.74	16.30	175	4.30	4.80	–	GBFP
GBO25-16NO1	1600	500										
VBO36-08NO8	800	250	18	85	550	0.76	9.10	150	7.00	8.00	–	FO-B
VBO36-12NO8	1200	400										
VBO36-16NO8	1600	500	18	85	550	0.76	9.10	150	7.00	8.00	–	FO-B
VBO36-18NO8	1800	575										
FBO40-12N	1200	400	40	130	300	0.79	14.00	175	1.50	1.70	–	ISOPLUS i4-PAC™
VBO40-08NO6	800	250	40	115	320	0.81	12.10	150	1.30	1.40	–	SOT-227B (miniBLOC)
VBO40-12NO6	1200	400										
VBO40-16NO6	1600	500										
VBO52-08NO7	800	250	60	115	550	0.78	8.10	150	1.10	1.50	–	PWS-D
VBO52-12NO7	1200	400										
VBO52-16NO7	1600	500	60	115	550	0.78	8.10	150	1.10	1.50	–	PWS-D
VBO52-18NO7	1800	575										
VBO54-08NO7	800	250	55	105	300	0.82	12.20	150	1.10	1.50	–	ECO-PAC 1
VBO54-12NO7	1200	400										
VBO54-16NO7	1600	500										
VBO68-08NO7	800	250	70	105	550	0.81	7.80	150	0.90	1.30	–	ECO-PAC 1
VBO68-12NO7	1200	400										
VBO68-16NO7	1600	500										
VBO72-08NO7	800	250	70	110	750	0.78	6.00	150	0.90	1.30	–	PWS-D
VBO72-12NO7	1200	400										
VBO72-16NO7	1600	500	70	110	750	0.78	6.00	150	0.90	1.30	–	PWS-D
VBO72-18NO7	1800	575										


Single-Phase Rectifier Bridges




Single-Phase, B2U

Part Number	V _{RRM}	V _{VRMS}	I _{dAV}	@T _C	I _{FSM} 45°C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
1 Phase Rectifier Bridges with Standard Diodes, B2U											
VBO78-08NO7	800	250	80	115	750	0.81	5.9	150	0.70	1.00	ECO-PAC 2
VBO78-12NO7	1200	400									
VBO78-16NO7	1600	500									
VBO88-08NO7	800	250	90	115	1000	0.80	4.6	150	0.60	0.90	ECO-PAC 2
VBO88-12NO7	1200	400									
VBO88-16NO7	1600	500									
DLA100B800LB	800	400	124	80	400	0.75	4.2	175	1.00	1.45	SMPD-B
DLA100B1200LB	1200										
DMA120B800LB	800	250	130	90	500	0.88	6.4	175	0.80	1.30	PWS-E
VBO130-08NO7	800	250	130	110	1800	0.77	3.4	150	0.50	0.70	
VBO130-12NO7	1200	400									
VBO130-16NO7	1600	500	130	110	1800	0.77	3.4	150	0.50	0.70	PWS-E
VBO130-18NO7	1800	575									
VBO160-08NO7	800	250	160	110	2800	0.74	2.4	150	0.40	0.55	PWS-E
VBO160-12NO7	1200	400									
VBO160-16NO7	1600	500									
VBO160-18NO7	1800	575	160	110	2800	0.74	2.4	150	0.40	0.55	PWS-E


Sing-Phase Half- & Full-Controlled Rectifier Bridges



VGO...




VHF




VHFD

Part Number	V _{RRM}	V _{vRMS}	I _{dAV}	@T _C	I _{FSM} 45 °C 10 ms	V _{T0}	r _T	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
1 Phase Half Controlled Rectifier Bridges with Freewheeling Diode, B2HKF											
VHF25-08io7	800	250	32	85	200	0.85	27	125	1.30	1.80	ECO-PAC 1
VHF25-12io7	1200	400									
VHFD37-08io1	800	250	36	85	320	0.85	13	125	1.20	1.55	V1-A-Pack
VHFD37-12io1	1200	400									
VHFD37-16io1	1600	500									
1 Phase Half Controlled Rectifier Bridge, B2HZ											
VGO36-16io7	1600	500	36	85	320	0.85	13	125	1.40	2.00	ECO-PAC 1


Rectifier Modules



X024a
ISOPLUS i4-PAC™




X025b
GUFP



X030a
SMPD -B



X101
ECO-PAC 1



X102
ECO-PAC 2



X103
V1-A-Pack



X116b
FO-B




X122a
PWS-D



X122c
PWS-D Flat



X123c
PWS-E



Three-Phase, B6U


Three-Phase Rectifier Bridges

Three-Phase Rectifier Bridges With Standard Diodes, B6U

Part Number	V _{RRM}	V _{VRMS}	I _{dAV}	@T _C	I _{FSM} 45 °C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
FPO											
FUO22-12N	1200	400	30	120	150	0.81	31.0	175	3.00	3.20	ISOPLUS i4-PAC™
FUO22-16N	1600	500									
VUO25-08NO8	800	250	20	85	380	0.77	14.2	150	8.00	9.00	FO-B
VUO25-12NO8	1200	400									
VUO25-14NO8	1400	440	20	85	380	0.77	14.2	150	8.00	9.00	FO-B
VUO25-16NO8	1600	500									
VUO25-18NO8	1800	575									
VUO28-08NO7	800	250	30	105	120	0.84	28.8	150	2.50	2.90	ECO-PAC 1
VUO28-12NO7	1200	400									
VUO36-08NO8	800	250	27	85	550	0.76	9.1	150	7.00	8.00	FO-B
VUO36-12NO8	1200	400									
VUO36-14NO8	1400	440	27	85	550	0.76	9.1	150	7.00	8.00	FO-B
VUO36-16NO8	1600	500									
VUO36-18NO8	1800	575									
VUO34-08NO1	800	250	45	110	300	0.81	14.9	150	1.70	2.10	V1-A-Pack
VUO34-12NO1	1200	400									
VUO34-16NO1	1600	500	45	110	300	0.81	14.9	150	1.70	2.10	V1-A-Pack
VUO34-18NO1	1800	575									
GUO40-08NO1	800	250	40	90	370	0.74	16.3	175	4.30	4.80	GUFP
GUO40-12NO1	1200	400									
GUO40-16NO1	1600	500	40	90	370	0.74	16.3	175	4.30	4.80	GUFP
DMA40U1800GU	1800	575									
DNA40U2200GU	2200	690									
FUO50-16N	1600	500	50	120	270	0.78	17.0	175	2.10	2.30	ISOPLUS i4-PAC™
VUO52-08NO1	800	250	60	110	350	0.83	11.5	150	1.30	1.60	V1-A-Pack
VUO52-12NO1	1200	400									
VUO52-16NO1	1600	500	60	110	350	0.83	11.5	150	1.30	1.60	V1-A-Pack
VUO52-18NO1	1800	500									
VUO52-20NO1	2000	575	60	110	350	0.83	11.5	150	1.30	1.60	V1-A-Pack
VUO52-22NO1	2200	690									
VUO62-08NO7	800	250	60	120	550	0.78	8.1	150	1.10	1.50	PWS-D
VUO62-12NO7	1200	400									

Three-Phase Rectifier Bridges

Three-Phase Rectifier Bridges With Standard Diodes, B6U



Three-Phase, B6U

Part Number	V _{RRM}	V _{RMS}	I _{dAV}	@T _C	I _{FSM} 45 °C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
VUO62-14NO7	1400	440	60	120	550	0.78	8.1	150	1.10	1.50	PWS-D
VUO62-16NO7	1600	500									
VUO62-18NO7	1800	575									
VUO64-16NO7	1600	500	60	120	550	0.78	8.1	150	1.10	1.50	PWS-D Flat
VUO68-08NO7	800	250	70	105	300	0.82	12.2	150	1.10	1.50	ECO-PAC 1
VUO68-12NO7	1200	400									
VUO68-16NO7	1600	500									
VUO80-08NO1	800	250	80	110	600	0.81	7.8	150	1.10	1.40	V1-A-Pack
VUO80-12NO1	1200	400									
VUO80-16NO1	1600	500	80	110	600	0.81	7.8	150	1.10	1.40	V1-A-Pack
VUO80-18NO1	1800	575									
VUO82-08NO7	800	250	90	115	750	0.78	6.0	150	0.90	1.30	PWS-D
VUO82-12NO7	1200	400									
VUO82-14NO7	1400	440	90	115	750	0.78	6.0	150	0.90	1.30	PWS-D
VUO82-16NO7	1600	500									
VUO82-18NO7	1800	575									
VUO84-16NO7	1600	500	90	115	750	0.78	6.0	150	0.90	1.30	PWS-D Flat
VUO86-08NO7	600	125	90	105	550	0.81	7.8	150	0.90	1.30	ECO-PAC 1
VUO86-12NO7	1200	400									
VUO86-16NO7	1600	500									
DMA90U1800LB	1800	575	90	110	350	0.81	12.7	175	1.10	1.50	SMPD-B
DNA90U2200LB	2200	690									
VUO98-08NO7	800	250	105	115	750	0.81	5.9	150	0.70	1.00	ECO-PAC 2
VUO98-12NO7	1200	400									
VUO98-16NO7	1600	500									
VUO105-18NO7	1800	575	120	105	1500	0.78	4.8	150	0.80	1.10	X121a
VUO110-08NO7	800	250	125	110	1200	0.79	4.5	150	0.70	1.00	PWS-E
VUO110-12NO7	1200	400									
VUO110-16NO7	1600	500	125	110	1200	0.79	4.5	150	0.70	1.00	PWS-E
VUO110-18NO7	1800	575									
MDMA120U1600VA	1600	500	120	110	850	0.79	5.9	150	0.65	0.85	V1-A-Pack
MDMA150U1600VA	1600	500	150	110	1100	0.83	4.7	150	0.50	0.70	V1-A-Pack
VUO121-16NO1	1600	500	120	105	700	0.80	7.6	150	0.65	0.75	E2-Pack
VUO122-08NO7	800	250	125	115	1000	0.80	4.6	150	0.60	0.90	ECO-PAC 2
VUO122-12NO7	1200	400									
VUO122-16NO7	1600	500									


Rectifier Modules




X027a
SOT-227B (miniBLOC)




X103
V1-A-Pack




X104
V2-Pack



X112
E2-Pack



X112a
E2-Pack PFP



X113a
E3-Pack PFP




X123c
PWS-E




X123h
PWS-E Flat

Three-Phase Rectifier Bridges


Three-Phase Rectifier Bridges With Standard Diodes, B6U



DM/NA...YA...



DM/NA...YC...





**VUO..DM/NA..U..
MDM/NA..U..**

Part Number	V _{RRM}	V _{VRMS}	I _{dAV}	@T _C	I _{FSM} 45 °C 10 ms	V _{F0}	r _F	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
DNA90YA2200NA	2200	690	90	85	370	0.86	11.4	150	1.20	1.30	SOT-227B (miniBLOC)
DNA90YC2200NA	2200	690									
DMA150YA1600NA	1600	500									
DMA150YC1600NA	1600	500	150	95	700	0.82	6.3	150	0.60	0.70	SOT-227B (miniBLOC)
DMA200YA1600NA	1600	500									
DMA200YC1600NA	1600	500									
DMA240YA1600NA	1600	500	200	100	1000	0.86	4.4	150	0.45	0.55	SOT-227B (miniBLOC)
DMA240YC1600NA	1600	500									
DMA240YC1600NA	1600	500									
VUO160-08NO7	800	250	175	110	1800	0.77	3.4	150	0.50	0.70	PWS-E
VUO160-12NO7	1200	400									
VUO160-16NO7	1600	500									
VUO160-18NO7	1800	575	175	110	1800	0.77	3.4	150	0.50	0.70	PWS-E
VUO162-16NO7	1600	500									
VUO190-08NO7	800	250									
VUO190-12NO7	1200	400	240	110	2800	0.74	2.4	150	0.40	0.55	PWS-E
VUO190-16NO7	1600	500									
VUO190-18NO7	1800	575									
VUO192-16NO7	1600	500	240	110	2800	0.74	2.4	150	0.40	0.55	PWS-E
MDNA240U2200ED	2200	690									
MDMA450U1600PTEH	1600	450									
MDMA660U1600PTEH	1600	500	660	85	5000	0.77	1.8	150	0.15	0.08	E3-Pack PFP
MDNA660U2200PTEH	2200	690									
MDMA900U1600PTEH	1600	500									

Three-Phase Rectifier Bridges


With IGBT and Fast Diode for Brake Unit



Part Number	Rectifier			Brake IGBT		Fast Diode			Package
	V _{RRM}	I _{dAV}	@T _C	V _{CES}	I _{C80}	V _{RRM}	I _{F(AV)}	t _{rr}	
	V	A	°C	V	A	V	A	ns	
VVZB135-16T1ioXT	1600	150	85	1200	115	1200	32	150	E2-Pack
VVZB170-16T2ioXT	1600	180	85	1200	165	1200	32	300	E2-Pack
VVZB170-16T2ioXT-PFP	1600	180	85	1200	165	1200	32	300	E2-Pack-PFP
MCMA241UI1600ED	1600	240	80	1200	115	1200	59	350	E2-Pack
MCMA242UI1600ED	1600	240	80	1200	165	1200	59	350	E2-Pack
MCMA241UI1600PED	1600	240	80	1200	115	1200	59	350	E2-Pack-PFP
MCMA242UI1600PED	1600	240	80	1200	165	1200	59	350	E2-Pack-PFP

Three-Phase Rectifier Bridges

Three-Phase Rectifier Bridges With IGBT and Fast Diode for Brake Unit



Part Number	Rectifier			Brake IGBT		Fast Diode			Package
	V_{RRM}	I_{dAV}	@ T_C	V_{CES}	I_{C80}	V_{RRM}	$I_{F(AV)}$	t_{tr}	
	V	A	°C	V	A	V	A	ns	
VUB72-12T1NOXT	1200	75	110	1200	50	1200	21	130	V1-A-Pack
VUB72-16T1NOXT	1600	75	110	1200	50	1200	21	130	V1-A-Pack
VUI72-16T1NOXT	1600	75	110	1200	50	—	—	—	V1-A-Pack
VUB116-16T1NOXT	1600	120	105	1200	115	1200	32	150	E2-Pack
VUB120-16T1NOX	1600	180	90	1200	115	1200	32	300	V2-Pack
VUB120-16T1NOXT	1600	180	90	1200	115	1200	32	300	V2-Pack
VUB145-16T1NOXT	1600	150	105	1200	165	1200	32	300	E2-Pack
VUB160-16T1NOX	1600	180	90	1200	165	1200	32	150	V2-Pack
VUB160-16T2NOX	1600	180	90	1200	215	1200	32	150	V2-Pack
VUB160-16T1NOXT	1600	180	90	1200	165	1200	32	150	V2-Pack
VUB160-16T2NOXT	1600	180	90	1200	215	1200	32	150	V2-Pack
MDMA213UB1600PTED	1600	210	85	1200	115	1200	59	350	E2-Pack-PFP
MDMA241UB1600ED	1600	240	85	1200	115	1200	59	350	E2-Pack
MDMA281UB1600PTED	1600	280	85	1200	115	1200	59	350	E2-Pack-PFP
MDMA361UB1600PTED	1600	360	85	1200	165	1200	90	350	E2-Pack-PFP
MDMA451UB1600PTED	1600	450	85	1200	165	1200	90	350	E2-Pack-PFP
MDMA451UB1600PTEH	1600	450	85	1200	165	1200	90	350	E2-Pack-PFP
MDNA360UB2200PTED	2200	360	85	1700	145	1700	83	550	E2-Pack PFP
MDMA450UB1600PTED	1600	450	85	1200	175	1200	90	350	E2-Pack PFP
MDMA450UB1600PTEH	1600	450	85	1200	175	1200	90	350	E3-Pack PFP

Successor Part Number

Due to current PCN refer to: LFPCN250121-2

Obsolete Part Number	Successor Part Number
Three-Phase Rectifier Bridge with Brake Unit	
VUB72-12NOXT	VUB72-12T1NOXT
VUB72-16NOXT	VUB72-16T1NOXT
VUI72-16NOXT	VUI72-16T1NOXT
VUB116-16NOXT	VUB116-16T1NOXT
VUB120-16NOX	VUB120-16T1NOX
VUB120-16NOXT	VUB120-16T1NOXT
VUB145-16NOXT	VUB145-16T1NOXT
VUB160-16NOX	VUB160-16T1NOX
VUB160-16NOX	VUB160-16T2NOX
VUB160-16NOXT	VUB160-16T1NOXT
VUB160-16NOXT	VUB160-16T2NOXT
MDMA210UB1600PTED	MDMA213UB1600PTED
MDMA240UB1600ED	MDMA241UB1600ED
MDMA280UB1600PTED	MDMA281UB1600PTED
MDMA360UB1600PTED	MDMA361UB1600PTED
MDMA450UB1600PTED	MDMA451UB1600PTED
MDMA450UB1600PTEH	MDMA451UB1600PTEH

Obsolete Part Number	Successor Part Number
Half-Controlled Three-Phase Rectifier Bridge with Brake Unit	
VVZB135-16ioXT	VVZB135-16T1ioXT
VVZB170-16ioXT	VVZB170-16T2ioXT
VVZB170-16ioXT-PFP	VVZB170-16T2ioXT-PFP
MCMA240UI1600ED	MCMA241UI1600ED
MCMA240UI1600ED	MCMA242UI1600ED
MCMA240UI1600PED	MCMA241UI1600PED
MCMA240UI1600PED	MCMA242UI1600PED


Rectifier Modules



X027a
SOT-227B (miniBLOC)




X103
V1-A-Pack



X113
E3-Pack



X253b
UGB




X030a
SMPD -B



X105a
V1-B-Pack




X123b
PWS-E




X254
VG-A




X101
ECO-PAC 1




X105c
V1-B-Pack




X251
UGE



X255
VG-B



X102
ECO-PAC 2




X112
E2-Pack




X253
UGD


Three-Phase Rectifier Bridges




...UC...
VUC



VVZ



VVZF
...UJ...



VTO


Part Number	V _{RRM}	V _{VRMS}	I _{dAVM}	@T _H	I _{FSM/TSM} 10 ms, 45 °C		V _{T0}	r _T	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A		V	mΩ	°C	K/W	K/W	
3 Phase Rectifier Bridges with Standard or Fast Diodes (t _r = 1.5 ms) & Integrated Softstart Thyristor												
VUC36-12go2	1200	400	34	85	Dio.	300	1.20	16	125	1.40	2.00	V1-B-Pack (a)
					Thy.	400	0.85	10	125	0.90	1.10	
VUC36-16go2	1600	500	34	85	Dio.	300	1.20	16	125	1.40	2.00	
					Thy.	400	0.85	10	125	0.90	1.10	
MDMA60UC1600VC	1600	500	60	110	Dio.	350	0.83	11.5	150	1.30	1.60	V1-B-Pack (c)
					Thy.	800	0.89	5.3	140	0.70	0.90	
MDMA360UC1600TED	1600	500	360	85	Dio.	1900	0.82	3.4	150	0.25	0.35	E2-Pack
					Thy.	2400	0.84	3.1		0.17	0.25	

Three-Phase Half- & Full-Controlled Rectifier Bridges


Part Number	V _{RRM}	V _{VRMS}	I _{dAVM}	@T _H	I _{FSM/TSM} 10 ms, 45 °C	V _{T0}	r _T	T _{VJM}	R _{thJC}	R _{thJH}	Package
	V	V	A	°C	A	V	mΩ	°C	K/W	K/W	
3 Phase Half-Controlled Rectifier Bridges, B6HK											
VVZ39-08ho7	800	250	39	85	200	0.85	27.0	125	1.30	1.80	ECO-PAC 1
VVZ39-12ho7	1200	400									
VVZ40-12io1	1200	400	34	100	320	0.85	15.0	125	1.00	1.60	V1-B-Pack (a)
VVZ40-16io1	1600	500									
CLE90UH1200TLB	1200	400	90	90	350	0.92	13.0	150	0.90	1.30	SMPD-B
VVZ110-12io7	1200	400	110	85	1150	0.85	6.0	125	0.65	0.80	PWS-E
VVZ175-12io7	1200	400	167	85	1500	0.85	3.5	125	0.46	0.55	PWS-E
VVZ175-16io7	1600	500									
MCMA450UH1600TEH	1600	500	450	90	2400	0.84	3.1	150	0.17	0.25	E3-Pack
3 Phase Half-Controlled Rectifier Bridges with Freewheeling Diodes,B6HKF											
MCMA120UJ1800ED	1800	575	117	80	500	0.89	13.6	150	0.65	0.75	E2-Pack
3 Phase Full-Controlled Rectifier Bridges, B6C											
VTO39-08ho7	800	250	39	85	200	0.85	27.0	125	1.30	1.80	ECO-PAC 1
VTO39-12ho7	1200	400									

AC Controller–1,2,&3 Phase


$I_{RMS} = 35\text{--}230\text{ A}$



MMO/CLA...MB..




VW 2x..




VWO

Part Number		V_{RRM}	V_{VRMS}	I_{RMS}	@ T_C	$I_{TSM}\ 10\text{ ms}, 45^\circ\text{C}$	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thJH}	Package
		V	V	A	$^\circ\text{C}$	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
1 Phase	MMO62-12io6	1200	400	66	95	400	0.87	13.6	150	0.90	1.10	SOT-227B (miniBLOC)
	MMO62-16io6	1600	500									
	MMO74-12io6	1200	400									
	MMO74-16io6	1600	500	88	95	600	0.87	10.5	150	0.70	0.80	SOT-227B (miniBLOC)
	MMO90-12io6	1200	400									
	MMO90-14io6	1400	440									
	MMO90-16io6	1600	500	110	95	800	0.88	6.0	150	0.60	0.70	SOT-227B (miniBLOC)
	CLA110MB1200NA	1200	400									
	MMO110-12io7	1200	400		112	85	1000	0.85	5.6	150	0.80	ECO-PAC 1
	MMO110-14io7	1400	440									
	MMO140-12io7	1200	400	130	85	1150	0.85	5.2	150	0.70	0.82	ECO-PAC 1
	MMO140-16io7	1600	500									
	MMO175-12io7	1200	400		175	85	1500	0.85	3.7	150	0.50	ECO-PAC 1
	MMO175-16io7	1600	500									
2 Phase	MMO230-12io7	1200	400	230	85	2250	0.8	2.4	125	0.26	0.46	ECO-PAC 2
	MMO230-16io7	1600	500									
	VW2x60-12io1	1200	400									
	VW2x60-14io1	1400	440									
3 Phase	VW2x60-16io1	1600	500	2×60	85	520	0.85	11.0	125	0.92	1.22	V1-A-Pack
	VWO35-08ho7	800	250									
	VWO35-12ho7	1200	400									


Single Phase and Three-Phase High Voltage Rectifier Modules



UGE



UGB




UGD

Part Number	V_{RRM}	$I_{dAV}^{1/2}$	$I_{FSM}\ 10\text{ ms}, 45^\circ\text{C}$	V_{F0}	r_F	T_{VJM}	R_{thJA1}^1	R_{thJA2}^2	Package
	V	V	A	V	m Ω	$^\circ\text{C}$	K/W	K/W	
UGE0421AY4	3200	23 / 7.4	300	1.70	16	150	1.9	7.1	UGE
UGE0221AY4	4800	10 / 3.8	180	2.55	90	150	1.7	8.0	UGE
UGE1112AY4	8000	4.2 / 2.0	120	4.25	215	150	4.2	10.0	UGE
UGE3126AY4	24000	2.0 / 0.8	70	12.00	1800	150	2.7	8.7	UGE
UGB3132AD	4800	1.3	60	—	—	150	—	—	UGB
UGB6124AG	10500	1.0	50	—	—	150	—	—	UGB
UGD6123AG	7200	1.8	50	—	—	150	—	—	UGD
UGD8124AG	10500	1.2	50	—	—	150	—	—	UGD


¹ for oil-cooling with cooling plate, $T_A = 35^\circ\text{C}$

² for natural air cooling without cooling plate, $T_A = 45^\circ\text{C}$


Braking Rectifier Assemblies



VGF 0136 AH



VGF 0136 AB



VGB 0124 AY7

Part Number	$V_{VRMS}\text{ typ.}$	$V_{dAV}\text{ typ.}$	$I_{dAVM}\text{ typ.}$	$I_{dAVM}\text{ max.}$	$V_{RRM}\text{ max.}$	$I_{FSM}\text{ max.}$	$I^2t\text{ max.}$	Package
	V	V	A	A	V	A	A ^2s	
VGB0124AY7a	380	340	1.0	1.0	1400	60	28	VG-A
VGF0136AB	1000	440	1.2	1.5	2800	80	40	VG-B

XFS Trench IGBT Introduction

The latest generation XFS7 Insulated Gate Bipolar Transistor (IGBT) features advanced narrow mesa trench gate technology, resulting in significantly improved performance characteristics for high-efficiency applications. This design enables strong carrier enhancement at the emitter side, which significantly reduces conduction losses.


XFS7 offers also excellent controllability due to its very low gate charge Q_g , allowing for precise adjustment of turn-on speed across a broad range. This flexibility enables optimal loss management between the IGBT and the diode, improving overall performance. In addition, the lower Q_g reduces the energy required for switching, enabling the use of a smaller, more cost-effective gate driver circuitry.

The wafer backside process and buffer/collector profiles are engineered for optimal carrier distribution, improving device ruggedness while preserving low losses. The device exhibits soft turn-off waveforms without oscillations and demonstrates exceptional robustness under demanding high current turn-off and short-circuit conditions. Reliability has been further improved over the previous generation, particularly in humid environments, with the device successfully passing high humidity and high temperature tests at 80% of the rated voltage.


These features make the XFS7 IGBT ideal for many demanding applications, including motor drives, traction inverters, and power supplies.

Key benefits of XFS7:


- Very low on-state voltage $V_{CE(sat)}$
- Very low gate charge Q_g allowing excellent controllability
- Optimized switching losses
- 10 μs short circuit robustness

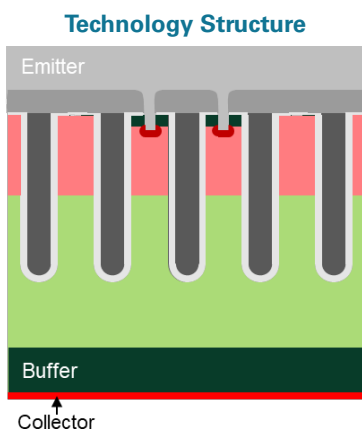


1200 V Technology Platform Comparison

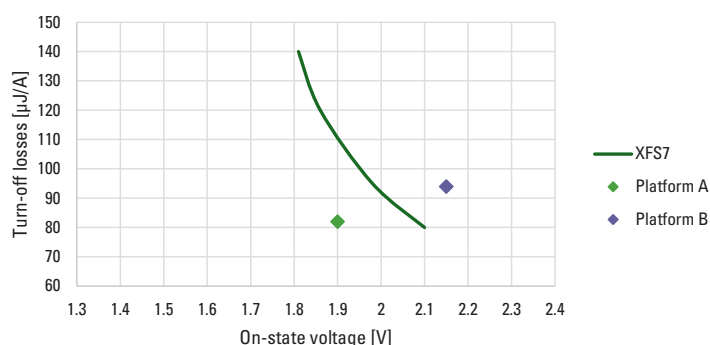


CBI, Half-Controlled

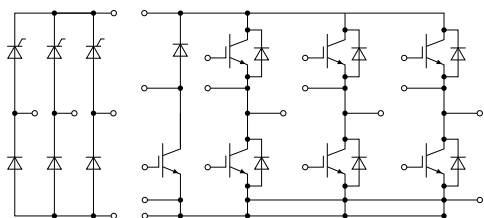


Boost + shunt




Phase Leg




Phase Leg + Shunt




6-Pack

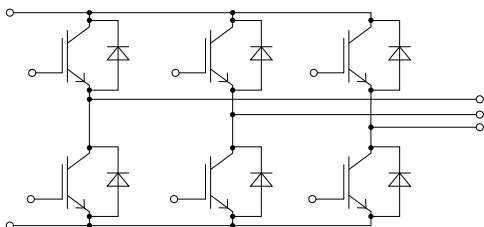


CBI*

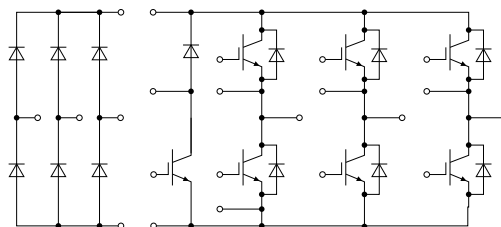

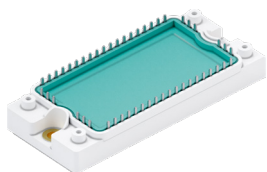

**X112
E2-Pack**

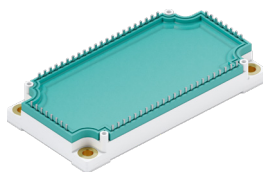

**X113
E3-Pack**

Upcoming 1200 V IGBT Modules

1200 V IGBT Module line in E2-Pack

Current Rating at 90°C	6-Pack	CBI*	Boost + Shunt	Phase Leg + Shunt	Status
25 A	-	MITG25WB1200TED	-	-	Under Development**
35 A	-	MITG35WB1200TED	-	-	
50 A	MITG50W1200TED	MITG50WB1200TED	-	-	
75 A	MITG75W1200TED	MITG75WB1200TED	-	-	
100 A	MITG100W1200TED	-	-	-	
300 A	-	-	MITG300RF1200TED	MITG300PF1200ZTED	

* CBI = Converter + Brake + Inverter

** Contact sales for more information

1200 V IGBT Module line in E3-Pack

Current Rating at 90°C	6-Pack	6-Pack + shunt	CBI*	CBI, Half-Controlled	Phase Leg + Shunt	Status
50 A	-	-	MITG50WB1200TEH	-	-	Under Development**
75 A	-	MITG75W1200ZTEH	MITG75WB1200TEH	-	-	
100 A	-	MITG100W1200ZTEH	MITG100WB1200TEH	MITG100WH1200TEH	-	
150 A	MITG150W1200TEH	MITG150W1200ZTEH	MITG150WB1200TEH	-	-	
200 A	MITG200W1200TEH	MITG200W1200ZTEH	-	-	-	
600 A	-	-	-	-	MITG600PF1200ZTEH	

** Contact sales for more information

1200 V IGBT Module line in MiniPack 1B

Current Rating at 90°C	Phase Leg	Phase Leg + shunt	Status
225 A	MITG225PF1200PTSF	-	Under Development**
300 A	MITG300PF1200PTSF	-	
450 A	MITG450PF1200PTSF	-	
600 A	MITG600PF1200PTSF	MITG600PF1200PZTSF	
900 A	MITG900PF1200PTSF	-	

** Contact sales for more information

1200 V IGBT Module line in MiniPack 2B


Current Rating at 90°C	6-Pack	CBI	Status
15 A	-	MITG15WB1200TMI	Under Development**
25 A	-	MITG25WB1200TMI	
35 A	-	MITG35WB1200TMI	
50 A	MITG50W1200TMI	-	
75 A	MITG75W1200TMI	-	

* CBI = Converter + Brake + Inverter

** Contact sales for more information

High-Power Devices

Capsule Devices – Excluding IGBT's

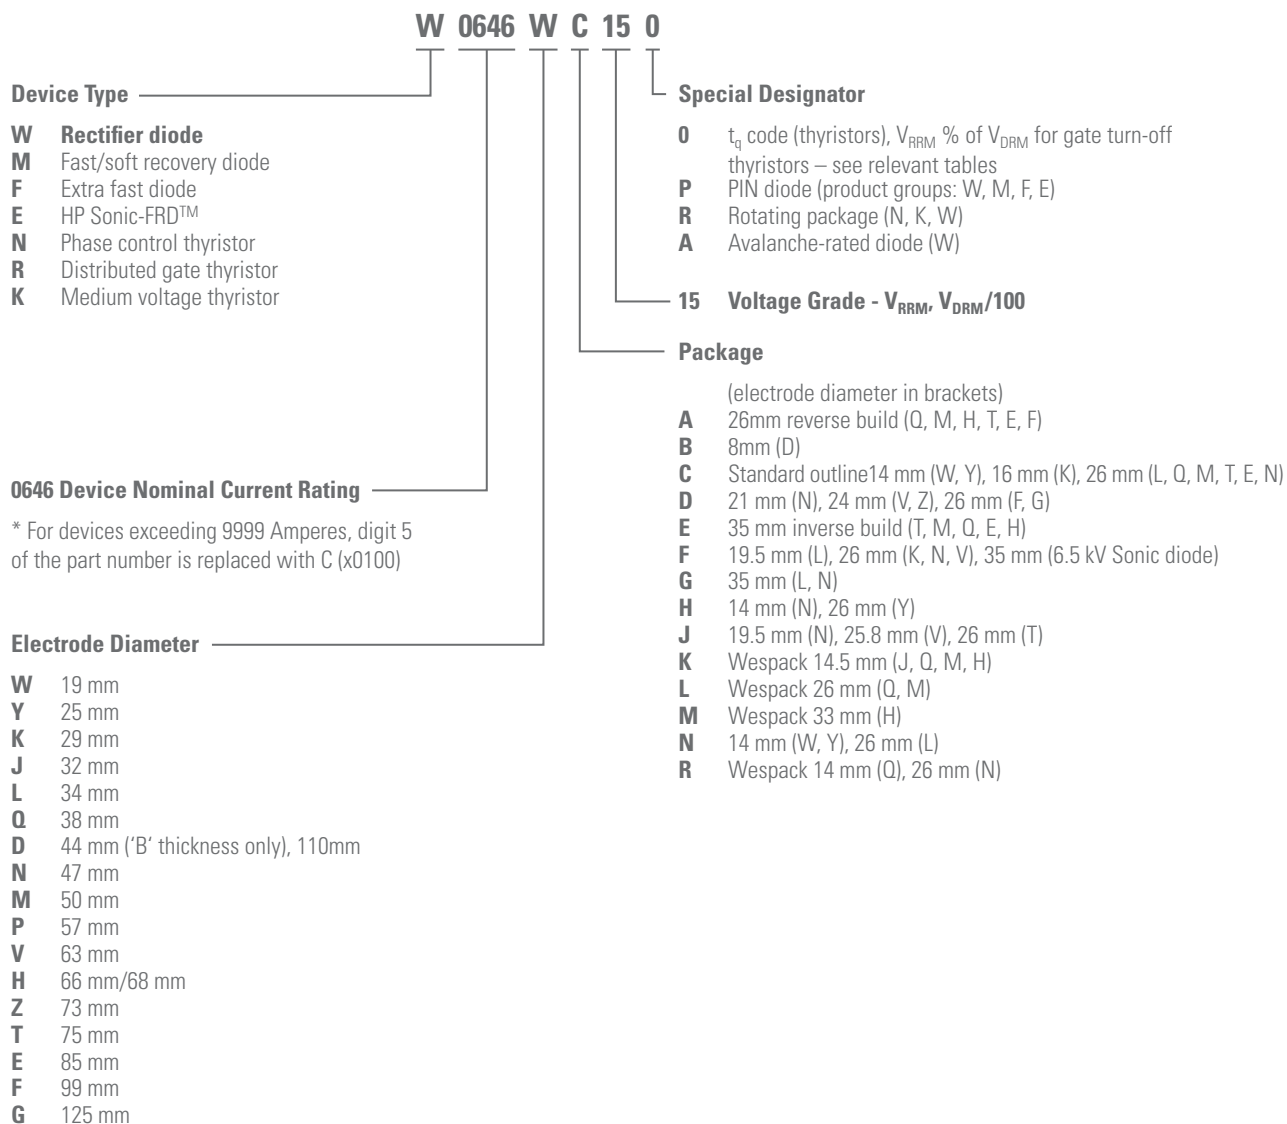


t_q Code


v	No Code		
A	10	M	70
B	12	N	100
C	15	P	120
D	20	R	140
E	25	S	160
F	30	T	200
G	35	V	250
H	40	W	300
J	50	X	400
K	60	Y	500
L	65	Z	1000

Nomenclature

Press-Pack IGBT Capsule Devices

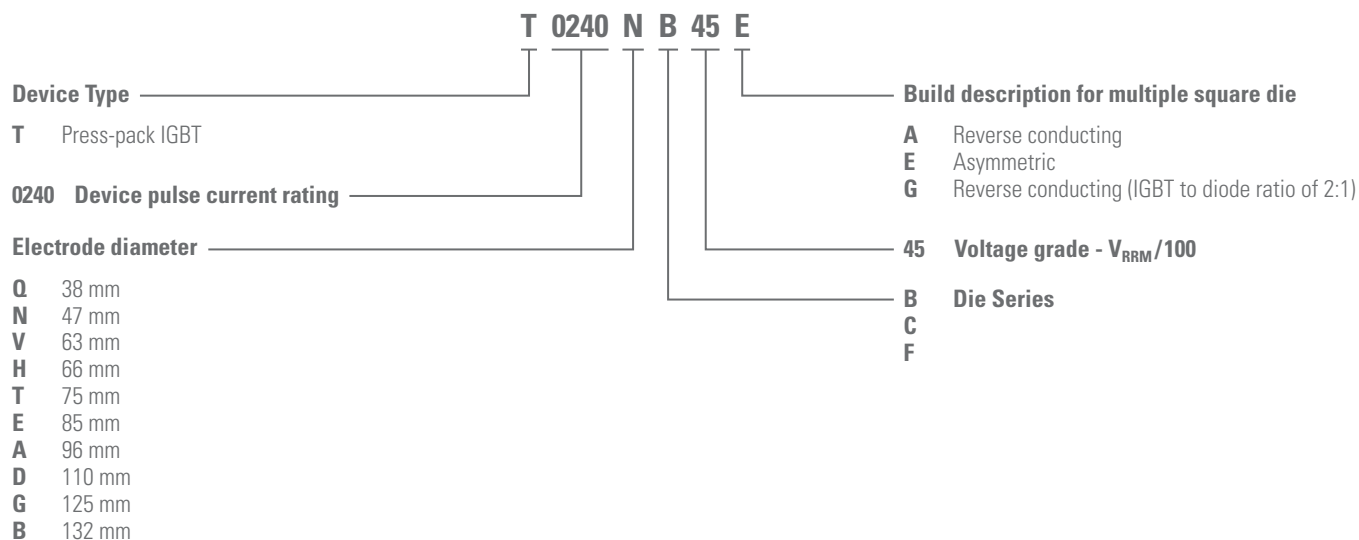

Stud Devices

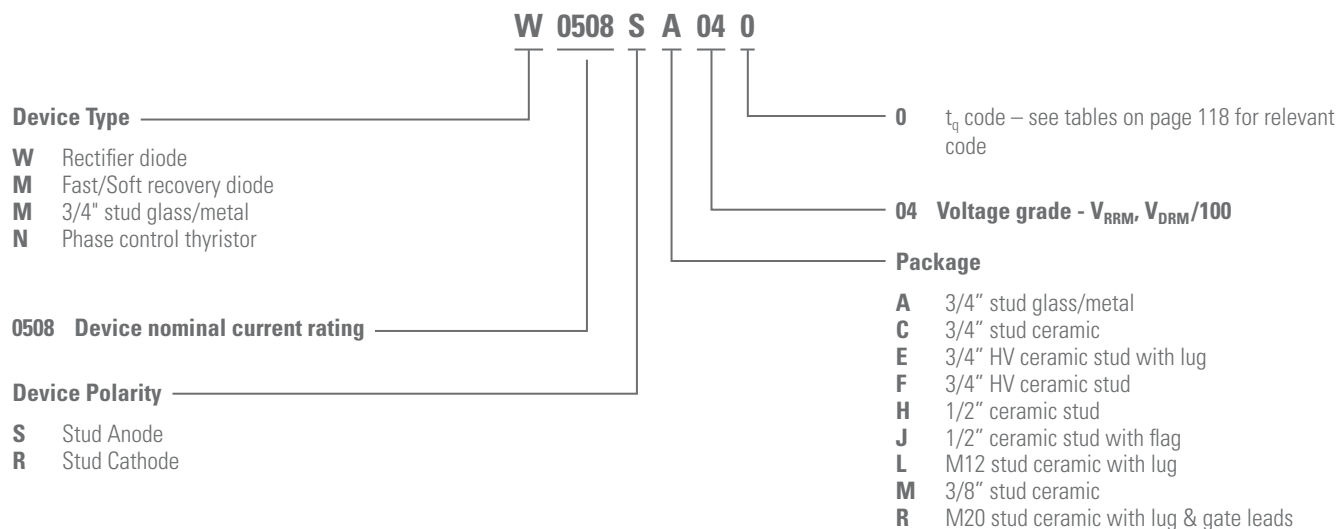

All Littelfuse Technology stud devices are available with or without leads, sleeving, nuts, and washers.

Please add one of the following three-letter codes (based on the options required) to the end of the part number when ordering:

- 000** Leaded stud, no sleeving, no nuts and washers supplied
- SOL** Leaded stud with standard* sleeving, nuts and washers supplied loose
- 00L** Leaded stud, no sleeving, nuts and washers supplied loose
- NLL** Non-leaded stud, nuts and washers supplied loose (also applies to devices with flag/tag terminals)
- SOF** Leaded stud with standard* sleeving, fitted nuts and washers
- 00F** Leaded stud, no sleeving, nuts and washers fitted
- NLF** Non-leaded stud, nuts and washers fitted (also applies to devices with flag/tag terminals)
- S00** Leaded stud with standard* sleeving, no nuts and washers supplied
- NLS** Non-leaded stud, no nuts and washers fitted (also applies to devices with flag/tag terminals)

* Standard sleeving means the following:
 Red for all thyristor studs
 Blue for "S" polarity diode studs
 Red for "R" polarity diode studs


High-Power Devices



W1
Weight 70 g



W2
Weight 80 g



W3
Weight 140 g



W4
Weight 340 g




W5
Weight 510 g



W6
Weight 1 kg



W37
Weight 510 g



W43
Weight 800 g



W54
Weight 530 g




W89
Weight 1.3 kg



W94
Weight 1.6 kg



W120
Weight 450 g



W121
Weight 330 g



W123
Weight 330 g



Rectifier Diodes—Capsule Types

Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJK}		Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		@T _{JM}			180° Sine	120° Rect.	
	V	A	A	A²s	V	mΩ	°C	K/W	K/W	
W0507YH420	4200	505	7600	289 × 10³	0.970	0.880	160	0.1000	0.1170	W3
W0507YH450	4500	505	7600	289 × 10³	0.970	0.880	160	0.1000	0.1170	W3
W0642WC160	1600	680	5500	151 × 10³	1.070	0.676	190	0.0900	0.0980	W1
W0642WC200	2000	680	5500	151 × 10³	1.070	0.676	190	0.0900	0.0980	W1
W0642WC240	2400	680	5500	151 × 10³	1.070	0.676	190	0.0900	0.0980	W1
W0790LG650	6500	790	6000	180 × 10³	0.919	1.249	150	0.0394	0.0445	W120
W0880LC620	6200	880	6000	180 × 10³	0.919	1.249	150	0.033	0.04	W4
W0880LC650	6500	880	6000	180 × 10³	0.919	1.249	150	0.033	0.04	W4
W0880LC680	6800	880	6000	180 × 10³	0.919	1.249	150	0.033	0.04	W4
W0925LG500	5000	925	7200	259 × 10³	1.000	0.702	150	0.0394	0.0445	W120
W0925LG560	5600	925	7200	259 × 10³	1.000	0.702	150	0.0394	0.0445	W120
W0925LG600	6000	925	7200	259 × 10³	1.000	0.702	150	0.0394	0.0445	W120
W0944WC120	1200	944	9000	405 × 10³	0.790	0.342	190	0.0900	0.0980	W1
W0944WC150	1500	944	9000	405 × 10³	0.790	0.342	190	0.0900	0.0980	W1
W1032LC500	5000	1032	7200	259 × 10³	1.000	0.702	150	0.0330	0.0400	W4
W1032LC560	5600	1032	7200	259 × 10³	1.000	0.702	150	0.0330	0.0400	W4
W1032LC600	6000	1032	7200	259 × 10³	1.000	0.702	150	0.0330	0.0400	W4
W1060LG420	4200	1060	9200	423 × 10³	1.000	0.575	160	0.0394	0.0445	W120
W1060LG450	4500	1060	9200	423 × 10³	1.000	0.575	160	0.0394	0.0445	W120
W1074YC200	2000	1074	10800	583 × 10³	0.920	0.390	160	0.0500	0.0610	W2
W1074YC260	2600	1074	10800	583 × 10³	0.920	0.390	160	0.0500	0.0610	W2
W1074YC320	3200	1074	10800	583 × 10³	0.920	0.390	160	0.0500	0.0610	W2
W1074YH200	2000	1074	10800	583 × 10³	0.920	0.390	160	0.0500	0.0610	W3
W1074YH260	2600	1074	10800	583 × 10³	0.920	0.390	160	0.0500	0.0610	W3
W1074YH320	3200	1074	10800	583 × 10³	0.920	0.390	160	0.0500	0.0610	W3
W1185LC420	4200	1185	9200	423 × 10³	1.000	0.575	160	0.0330	0.0393	W4
W1185LC450	4500	1185	9200	423 × 10³	1.000	0.575	160	0.0330	0.0393	W4
W1260LG320	3200	1260	10600	562 × 10³	0.900	0.388	160	0.0394	0.0445	W120
W1260LG360	3600	1260	10600	562 × 10³	0.900	0.388	160	0.0394	0.0445	W120
W1263YC160	1600	1263	11700	684 × 10³	0.870	0.330	175	0.0500	0.0610	W2
W1263YC220	2200	1263	11700	684 × 10³	0.870	0.330	175	0.0500	0.0610	W2
W1263YC250	2500	1263	11700	684 × 10³	0.870	0.330	175	0.0500	0.0610	W2
W1263YH160	1600	1263	11700	684 × 10³	0.870	0.330	175	0.0500	0.0610	W3
W1263YH200	2000	1263	11700	684 × 10³	0.870	0.330	175	0.0500	0.0610	W3

Rectifier Diodes—Capsule Types


Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJK}		Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		@T _{JM}			180° Sine	120° Rect.	
			A	A ² s	V	mΩ		K/W	K/W	
W1263YH250	2500	1263	11700	684 × 10 ³	0.870	0.330	175	0.0500	0.0610	W3
W1360LG240	2400	1360	12700	800 × 10 ³	0.870	0.323	160	0.0394	0.0445	W120
W1360LG300	3000	1360	12700	800 × 10 ³	0.870	0.323	160	0.0394	0.0445	W120
W1748LC180	1800	1748	15400	118 × 10 ³	0.870	0.280	175	0.0330	0.0393	W4
W1748LC250	2500	1748	15400	118 × 10 ³	0.870	0.280	175	0.0330	0.0393	W4
W1856NC400	4000	1856	16000	128 × 10 ³	0.975	0.348	160	0.0220	0.0255	W5
W1856NC500	5000	1856	16000	128 × 10 ³	0.975	0.348	160	0.0220	0.0255	W5
W1975MC620	6200	1975	18000	1.62 × 10 ⁶	0.95	0.51	150	0.014	0.0158	W54
W1975MC650	6500	1975	18000	1.62 × 10 ⁶	0.950	0.510	150	0.0140	0.0158	W54
W1975MC680	6800	1975	18000	1.62 × 10 ⁶	0.950	0.510	150	0.0140	0.0158	W54
W2054NC420	4200	2054	19000	1.81 × 10 ⁶	0.800	0.300	160	0.0220	0.0274	W5
W2054NC450	4500	2054	19000	1.81 × 10 ⁶	0.800	0.300	160	0.0220	0.0274	W5
W2058LC100	1000	2058	19500	1.90 × 10 ⁶	0.790	0.192	175	0.0330	0.0393	W4
W2058LC120	1200	2058	19500	1.90 × 10 ⁶	0.790	0.192	175	0.0330	0.0393	W4
W2058LC140	1400	2058	19500	1.90 × 10 ⁶	0.790	0.192	175	0.0330	0.0393	W4
W2115MC520	5200	2122	19000	1.81 × 10 ⁶	1.074	0.405	150	0.0140	0.0158	W54
W2115MC560	5600	2122	19000	1.81 × 10 ⁶	1.074	0.405	150	0.0140	0.0158	W54
W2115MC600	6000	2122	19000	1.81 × 10 ⁶	1.074	0.405	150	0.0140	0.0158	W54
W2134NC360	3600	2134	20000	2.00 × 10 ⁶	0.865	0.260	160	0.0220	0.0255	W5
W2134NC400	4000	2134	20000	2.00 × 10 ⁶	0.865	0.260	160	0.0220	0.0255	W5
W2624NC240	2400	2624	28000	3.92 × 10 ⁶	0.780	0.160	160	0.0220	0.0255	W5
W2624NC280	2800	2624	28000	3.92 × 10 ⁶	0.780	0.160	160	0.0220	0.0255	W5
W2624ND240	2400	2624	28000	3.92 × 10 ⁶	0.780	0.160	160	0.0220	0.0255	W37
W2624ND280	2800	2624	28000	3.92 × 10 ⁶	0.780	0.160	160	0.0220	0.0255	W37
W2820VC420	4200	2820	26200	3.43 × 10 ⁶	1.300	0.147	160	0.0160	0.0190	W6
W2820VC450	4500	2820	26200	3.43 × 10 ⁶	1.300	0.147	160	0.0160	0.0190	W6
W2820VF420	4200	2820	26200	3.43 × 10 ⁶	1.300	0.147	160	0.0160	0.0190	W43
W2820VF450	4500	2820	26200	3.43 × 10 ⁶	1.300	0.147	160	0.0160	0.0190	W43
W2830HE520	5200	2830	32000	5.12 × 10 ⁶	0.910	0.260	150	0.0123	0.0133	W123
W2830HE560	5600	2830	32000	5.12 × 10 ⁶	0.910	0.260	150	0.0123	0.0133	W123
W2830HE600	6000	2830	32000	5.12 × 10 ⁶	0.910	0.260	150	0.0123	0.0133	W123
W2865HA620	6200	2862	32400	5.25 × 10 ⁶	0.982	0.308	150	0.0105	0.0116	W121
W2865HA650	6500	2862	32400	5.25 × 10 ⁶	0.982	0.308	150	0.0105	0.0116	W121
W2865HA680	6800	2862	32400	5.25 × 10 ⁶	0.982	0.308	150	0.0105	0.0116	W121
W2899MC460	4600	2899	25400	3.23 × 10 ⁶	0.996	0.222	160	0.0140	0.0158	W54
W2899MC480	4800	2899	25400	3.23 × 10 ⁶	0.996	0.222	160	0.0140	0.0158	W54
W3082MC420	4200	3120	26000	3.23 × 10 ⁶	0.923	0.192	160	0.0140	0.0160	W54
W3082MC450	4500	3120	26000	3.23 × 10 ⁶	0.923	0.192	160	0.0140	0.0160	W54
W3090HA520	5200	3110	32000	5.12 × 10 ⁶	0.910	0.260	150	0.0105	0.0116	W121
W3090HA560	5600	3110	32000	5.12 × 10 ⁶	0.910	0.260	150	0.0105	0.0116	W121
W3090HA600	6000	3110	32000	5.12 × 10 ⁶	0.910	0.260	150	0.0105	0.0116	W121
W3128VC360	3600	3128	30000	5.12 × 10 ⁶	0.875	0.158	160	0.0160	0.0190	W6
W3128VC400	4000	3128	30000	5.12 × 10 ⁶	0.875	0.158	160	0.0160	0.0190	W6
W3128VF360	3600	3128	30000	4.50 × 10 ⁶	0.875	0.158	160	0.0160	0.0190	W43
W3128VF400	4000	3128	30000	4.50 × 10 ⁶	0.875	0.158	160	0.0160	0.0190	W43
W3270NC200	2000	3270	28000	3.92 × 10 ⁶	0.826	0.104	175	0.0220	0.0255	W5
W3270NC220	2200	3270	28000	3.92 × 10 ⁶	0.826	0.104	175	0.0220	0.0255	W5
W3270NC22A ¹	2200	3239	27600	3.81 × 10 ⁶	0.818	0.108	175	0.0220	0.0255	W5
W3455QK200	2000	3455	20000	2.00 × 10 ⁶	0.940	0.139	180	0.0170	0.0207	WD2
W3455QK220	2200	3455	20000	2.00 × 10 ⁶	0.940	0.139	180	0.0170	0.0207	WD2
W3477MC360	3600	3470	28200	3.98 × 10 ⁶	0.908	0.146	160	0.0140	0.0158	W54
W3477MC400	4000	3470	28200	3.98 × 10 ⁶	0.908	0.146	160	0.0140	0.0158	W54
W3630TJ650	6500	3630	35000	6.125 × 10 ⁶	0.916	0.262	150	0.0080	0.0085	W89
W3630TE650	6500	3630	35000	6.125 × 10 ⁶	0.916	0.262	150	0.0080	0.0085	W94
W3697VC220	2200	3697	40000	8.00 × 10 ⁶	0.860	0.100	160	0.0160	0.0190	W6
W3697VC280	2800	3697	40000	8.00 × 10 ⁶	0.860	0.100	160	0.0160	0.0190	W6
W3697VF220	2200	3697	40000	8.00 × 10 ⁶	0.860	0.100	160	0.0160	0.0190	W43
W3697VF280	2800	3697	40000	8.00 × 10 ⁶	0.860	0.100	160	0.0160	0.0190	W43
W3708MC320	3200	3753	30000	4.50 × 10 ⁶	0.958	0.112	160	0.0140	0.0158	W54

¹ Avalanche Rated Diode

High-Power Devices




W5
Weight 510 g



W42
Weight 1.2 kg




W94
Weight 1.6 kg



WD7
Weight 200 g



W6
Weight 1 kg



W43
Weight 800 g



WD2
Weight 200 g



W111
Weight 1.6 kg



W7
Weight 1.7 kg



W54
Weight 530 g




WD3
Weight 270 g



W112
Weight 2.1 kg



W37
Weight 510 g



W89
Weight 1.3 kg



WD5
Weight 1.2 kg



WD6
Weight 1.5 kg

Rectifier Diodes—Capsule Types



Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJK}		Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		@ T _{JM}			180° Sine	120° Rect.	
	V	A	A	A ² s	V	mΩ	°C	K/W	K/W	
W3708MC350	3500	3753	30000	4.50 × 10 ⁶	0.958	0.112	160	0.0140	0.0158	W54
W3743ZC400	4000	3750	35000	6.13 × 10 ⁶	0.976	0.170	160	0.0110	0.0132	W7
W3743ZC450	4500	3750	35000	6.13 × 10 ⁶	0.976	0.170	160	0.0110	0.0132	W7
W3743ZC500	5000	3750	35000	6.13 × 10 ⁶	0.976	0.170	160	0.0110	0.0132	W7
W3743ZD400	4000	3750	35000	6.13 × 10 ⁶	0.976	0.170	160	0.0110	0.0132	W42
W3743ZD450	4500	3750	35000	6.13 × 10 ⁶	0.976	0.170	160	0.0110	0.0132	W42
W3743ZD500	5000	3750	35000	6.13 × 10 ⁶	0.976	0.170	160	0.0110	0.0132	W42
W3841VC300	3000	3841	39800	7.92 × 10 ⁶	0.860	0.115	175	0.0160	0.0190	W6
W3841VC340	3400	3841	39800	7.92 × 10 ⁶	0.860	0.115	175	0.0160	0.0190	W6
W3841VF300	3000	3841	39800	7.92 × 10 ⁶	0.860	0.115	175	0.0160	0.0190	W43
W3841VF340	3400	3841	39800	7.92 × 10 ⁶	0.860	0.115	175	0.0160	0.0190	W43
W3842MC240	2400	3842	35100	6.16 × 10 ⁶	0.831	0.118	160	0.0140	0.0158	W54
W3842MC280	2800	3842	35100	6.16 × 10 ⁶	0.831	0.118	160	0.0140	0.0158	W54
W3842MC28A ¹	2800	3842	35100	6.16 × 10 ⁶	0.831	0.118	160	0.0140	0.0158	W54
W3864QK120	1200	3864	22200	2.46 × 10 ⁶	0.861	0.109	180	0.0170	0.0210	WD2
W3864QK150	1500	3864	22200	2.46 × 10 ⁶	0.861	0.109	180	0.0170	0.0210	WD2
W3864QK180	1800	3864	22200	2.46 × 10 ⁶	0.861	0.109	180	0.0170	0.0210	WD2
W4096ZC420	4200	4096	41700	8.70 × 10 ⁶	0.730	0.158	160	0.0110	0.0132	W7
W4096ZC450	4500	4096	41700	8.70 × 10 ⁶	0.730	0.158	160	0.0110	0.0132	W7
W4096ZD420	4200	4096	41700	8.70 × 10 ⁶	0.730	0.158	160	0.0110	0.0132	W42
W4096ZD450	4500	4096	41700	8.70 × 10 ⁶	0.730	0.158	160	0.0110	0.0132	W42
W4205TJ520	5200	4205	45000	10.1 × 10 ⁶	0.850	0.190	150	0.0080	0.0085	W89
W4205TJ560	5600	4205	45000	10.1 × 10 ⁶	0.850	0.190	150	0.0080	0.0085	W89
W4205TJ600	6000	4205	45000	10.1 × 10 ⁶	0.850	0.190	150	0.0080	0.0085	W89
W4205TE520	5200	4205	45000	10.1 × 10 ⁶	0.850	0.190	150	0.0080	0.0085	W94
W4205TE560	5600	4205	45000	10.1 × 10 ⁶	0.850	0.190	150	0.0080	0.0085	W94
W4205TE600	6000	4205	45000	10.1 × 10 ⁶	0.850	0.190	150	0.0080	0.0085	W94
W4534NC030	300	4534	40000	8.00 × 10 ⁶	0.765	0.052	190	0.0220	0.0255	W5
W4534NC060	600	4534	40000	8.00 × 10 ⁶	0.765	0.052	190	0.0220	0.0255	W5
W4534ND030	300	4534	40000	8.00 × 10 ⁶	0.765	0.052	190	0.0220	0.0255	W37
W4534ND060	600	4534	40000	8.00 × 10 ⁶	0.765	0.052	190	0.0220	0.0255	W37
W4693QK050	500	4693	31500	4.98 × 10 ⁶	0.904	0.057	180	0.0170	0.0207	WD2
W4693QK080	800	4693	31500	4.98 × 10 ⁶	0.904	0.057	180	0.0170	0.0207	WD2
W4693QR050	500	4693	31500	4.98 × 10 ⁶	0.904	0.057	180	0.0170	0.0207	WD7
W4693QR080	800	4693	31500	4.98 × 10 ⁶	0.904	0.057	180	0.0170	0.0207	WD7

¹ Avalanche Rated Diode

Rectifier Diodes—Capsule Types

Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I _T	V _{T0}	r _T	T _{JM}	R _{thJK}		Fig. No.
			10 ms ½ sine V _R ≤ 60% V _{RRM}		@ T _{JM}			180° Sine	120° Rect.	
			A	A ² s	V	mΩ		°C	K/W	
	V	A	A	A ² s	V	mΩ	°C	K/W	K/W	
W4713HL300	3000	4713	56000	15.70 × 10 ⁶	0.807	0.090	160	0.0120	0.0132	WD5
W4713HL350	3500	4713	56000	15.70 × 10 ⁶	0.807	0.090	160	0.0120	0.0132	WD5
W4713HM300	3000	4713	56000	15.70 × 10 ⁶	0.807	0.090	160	0.0120	0.0132	WD6
W4713HM350	3500	4713	56000	15.70 × 10 ⁶	0.807	0.090	160	0.0120	0.0132	WD6
W4767MC180	1800	4755	38000	7.22 × 10 ⁶	0.827	0.083	175	0.0140	0.0158	W54
W4767MC220	2200	4755	38000	7.22 × 10 ⁶	0.827	0.083	175	0.0140	0.0158	W54
W5092ZC320	3200	5092	58000	16.8 × 10 ⁶	0.874	0.079	160	0.0110	0.0132	W7
W5092ZC350	3500	5092	58000	16.8 × 10 ⁶	0.874	0.079	160	0.0110	0.0132	W7
W5092ZD320	3200	5092	58000	16.8 × 10 ⁶	0.874	0.079	160	0.0110	0.0132	W42
W5092ZD350	3500	5092	58000	16.8 × 10 ⁶	0.874	0.079	160	0.0110	0.0132	W42
W5130MK240	2400	5130	42000	8.82 × 10 ⁶	0.910	0.070	175	0.0130	0.0149	WD3
W5130MK280	2800	5130	42000	8.82 × 10 ⁶	0.910	0.070	175	0.0130	0.0149	WD3
W5139TJ450	4500	5139	55000	15.10 × 10 ⁶	0.826	0.136	160	0.0080	0.0085	W89
W5139TJ480	4800	5139	55000	15.10 × 10 ⁶	0.826	0.136	160	0.0080	0.0085	W89
W5139TE450	4500	5139	55000	15.10 × 10 ⁶	0.826	0.136	160	0.0080	0.0085	W94
W5139TE480	4800	5139	55000	15.10 × 10 ⁶	0.826	0.136	160	0.0080	0.0085	W94
W5282ZC240	2400	5282	60000	18.00 × 10 ⁶	0.970	0.064	160	0.0110	0.0132	W7
W5282ZC300	3000	5282	60000	18.00 × 10 ⁶	0.970	0.064	160	0.0110	0.0132	W7
W5282ZD240	2400	5282	60000	18.00 × 10 ⁶	0.970	0.064	160	0.0110	0.0132	W42
W5282ZD300	3000	5282	60000	18.00 × 10 ⁶	0.970	0.064	160	0.0110	0.0132	W42
W5334MK200	2000	5334	46800	10.95 × 10 ⁶	0.892	0.069	180	0.0130	0.0149	WD3
W5334MK220	2200	5334	46800	10.95 × 10 ⁶	0.892	0.069	180	0.0130	0.0149	WD3
W5636MC120	1200	5636	46000	10.58 × 10 ⁶	0.698	0.059	175	0.0140	0.0160	W54
W5636MC150	1500	5636	46000	10.58 × 10 ⁶	0.698	0.059	175	0.0140	0.0160	W54
W5696VC100	1000	5696	53000	14.00 × 10 ⁶	0.650	0.059	190	0.0160	0.0190	W6
W5696VC140	1400	5696	53000	14.00 × 10 ⁶	0.650	0.059	190	0.0160	0.0190	W6
W5696VF100	1000	5696	53000	14.00 × 10 ⁶	0.650	0.059	190	0.0160	0.0190	W43
W5696VF140	1400	5696	53000	14.00 × 10 ⁶	0.650	0.059	190	0.0160	0.0190	W43
W5715ED520	5200	5715	60600	18.36 × 10 ⁶	0.863	0.135	150	0.0060	0.0063	W112
W5715ED560	5600	5715	60600	18.36 × 10 ⁶	0.863	0.135	150	0.0060	0.0063	W112
W5715ED600	6000	5715	66000	18.36 × 10 ⁶	0.863	0.135	150	0.0060	0.0063	W112
W5838ZC180	1800	5838	64000	20.50 × 10 ⁶	0.800	0.074	175	0.0110	0.0132	W7
W5838ZC220	2200	5838	64000	20.50 × 10 ⁶	0.800	0.074	175	0.0110	0.0132	W7
W5838ZD180	1800	5838	64000	20.50 × 10 ⁶	0.800	0.074	175	0.0110	0.0132	W42
W5838ZD220	2200	5838	64000	20.50 × 10 ⁶	0.800	0.074	175	0.0110	0.0132	W42
W5984TJ360	3600	5984	62000	19.20 × 10 ⁶	0.758	0.097	160	0.0080	0.0085	W89
W5984TJ400	4000	5984	62000	19.20 × 10 ⁶	0.758	0.097	160	0.0080	0.0085	W89
W5984TE360	3600	5984	62000	19.20 × 10 ⁶	0.758	0.097	160	0.0080	0.0085	W94
W5984TE400	4000	5984	62000	19.20 × 10 ⁶	0.758	0.097	160	0.0080	0.0085	W94
W6262ZC200	2000	6262	67000	22.40 × 10 ⁶	0.730	0.064	175	0.0110	0.0132	W7
W6262ZC240	2400	6262	67000	22.40 × 10 ⁶	0.730	0.064	175	0.0110	0.0132	W7
W6262ZD200	2000	6262	67000	22.40 × 10 ⁶	0.730	0.064	175	0.0110	0.0132	W42
W6262ZD240	2400	6262	67000	22.40 × 10 ⁶	0.730	0.064	175	0.0110	0.0132	W42
W6360EC520	5200	6360	60600	18.36 × 10 ⁶	0.863	0.135	150	0.0050	0.0054	W111
W6360EC560	5600	6360	60600	18.36 × 10 ⁶	0.863	0.135	150	0.0050	0.0054	W111
W6360EC600	6000	6360	66000	18.36 × 10 ⁶	0.863	0.135	150	0.0050	0.0054	W111
W6672TE320	3200	6672	65700	21.58 × 10 ⁶	0.864	0.067	160	0.0080	0.0085	W94
W6672TE350	3500	6672	65700	21.58 × 10 ⁶	0.864	0.067	160	0.0080	0.0085	W94
W6672TJ320	3200	6672	65700	21.58 × 10 ⁶	0.864	0.067	160	0.0080	0.0085	W89
W6672TJ350	3500	6672	65700	21.58 × 10 ⁶	0.864	0.067	160	0.0080	0.0085	W89
W7045MC030	300	7045	54000	14.60 × 10 ⁶	0.793	0.033	190	0.0140	0.0158	W54
W7045MC060	600	7045	54000	14.60 × 10 ⁶	0.793	0.033	190	0.0140	0.0158	W54
W8405ZC100	1000	8405	72000	25.90 × 10 ⁶	0.670	0.038	190	0.0110	0.0132	W7
W8405ZC140	1400	8405	72000	25.90 × 10 ⁶	0.670	0.038	190	0.0110	0.0132	W7
W8405ZD100	1000	8405	72000	25.90 × 10 ⁶	0.670	0.038	190	0.0110	0.0132	W42
W8405ZD140	1400	8405	72000	25.90 × 10 ⁶	0.670	0.038	190	0.0110	0.0132	W42
W8570TJ180	1800	8570	70200	24.60 × 10 ⁶	0.690	0.050	175	0.0080	0.0085	W89
W8570TJ220	2200	8570	70200	24.60 × 10 ⁶	0.690	0.050	175	0.0080	0.0085	W89

High-Power Devices



W89
Weight 1.3 kg



W94
Weight 1.6 kg



W111
Weight 1.6 kg



W112
Weight 2.1 kg



Rectifier Diodes—Capsule Types

Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJK}		Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		@T _{JM}			180° Sine	120° Rect.	
	V	A	A	A ² s	V	mΩ	°C	K/W	K/W	
W8570TE180	1800	8570	70200	24.60 × 10 ⁶	0.690	0.050	175	0.0080	0.0085	W94
W8570TE220	2200	8570	70200	24.60 × 10 ⁶	0.690	0.050	175	0.0080	0.0085	W94
W9830TJ120	1200	9830	72000	25.90 × 10 ⁶	0.670	0.043	190	0.0080	0.0085	W89
W9830TJ150	1500	9830	72000	25.90 × 10 ⁶	0.670	0.043	190	0.0080	0.0085	W89
W9830TE120	1200	9830	72000	25.90 × 10 ⁶	0.670	0.043	190	0.0080	0.0085	W94
W9830TE150	1500	9830	72000	25.90 × 10 ⁶	0.670	0.043	190	0.0080	0.0085	W94
W106CEC240	2400	10650	92000	42.32 × 10 ⁶	0.734	0.047	160	0.0050	0.0054	W111
W106CEC280	2800	10650	92000	42.32 × 10 ⁶	0.734	0.047	160	0.0050	0.0054	W111
W108CED180	1800	11300	94500	44.65 × 10 ⁶	0.678	0.039	175	0.0060	0.0063	W112
W108CED220	2200	11300	94500	44.65 × 10 ⁶	0.678	0.039	175	0.0060	0.0063	W112
W121CEC180	1800	12650	94500	44.65 × 10 ⁶	0.678	0.039	175	0.0050	0.0054	W111
W121CEC220	2200	12650	94500	44.65 × 10 ⁶	0.678	0.039	175	0.0050	0.0054	W111



W23
Weight 250 g



W24
Weight 250 g



W39
Weight 250 g



S



R

Rectifier Diodes—Stud Types

Part Number	V _{RRM}	I _{FAV} TC = 55°C	I _{FSM}	I _T	V _{TO}	r _T	T _{JM}	R _{thJC}		Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		@T _{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A²s	V	mΩ	°C	K/W	K/W	
LW0428RE250	2500	428	5500	151 × 10³	0.926	0.739	150	0.1300	0.1530	W39
W0428RE280	2800	428	5500	151 × 10³	0.926	0.739	150	0.1300	0.1530	W39
W0428RE320	3200	428	5500	151 × 10³	0.926	0.739	150	0.1300	0.1530	W39
W0428RF250	2500	428	5500	151 × 10³	0.926	0.739	150	0.1300	0.1530	W24
W0428RF280	2800	428	5500	151 × 10³	0.926	0.739	150	0.1300	0.1530	W24
W0428RF320	3200	428	5500	151 × 10³	0.926	0.739	150	0.1300	0.1530	W24
W0428SE250	2500	428	5500	151 × 10³	0.926	0.739	150	0.1300	0.1530	W39
W0428SE280	2800	428	5500	151 × 10³	0.926	0.739	150	0.1300	0.1530	W39
W0428SE320	3200	428	5500	151 × 10³	0.926	0.739	150	0.1300	0.1530	W39
W0428SF250	2500	428	5500	151 × 10³	0.926	0.739	150	0.1300	0.1530	W24
W0428SF280	2800	428	5500	151 × 10³	0.926	0.739	150	0.1300	0.1530	W24
W0428SF320	3200	428	5500	151 × 10³	0.926	0.739	150	0.1300	0.1530	W24
W0503RC160	1600	503	5500	151 × 10³	0.990	0.740	180	0.1300	0.1530	W24
W0503RC200	2000	503	5500	151 × 10³	0.990	0.740	180	0.1300	0.1530	W24
W0503RC240	2400	503	5500	151 × 10³	0.990	0.740	180	0.1300	0.1530	W24
W0503SC160	1600	503	5500	151 × 10³	0.990	0.740	180	0.1300	0.1530	W24
W0503SC200	2000	503	5500	151 × 10³	0.990	0.740	180	0.1300	0.1530	W24
W0503SC240	2400	503	5500	151 × 10³	0.990	0.740	180	0.1300	0.1530	W24
W0735RA120	1200	735	9000	405 × 10³	0.790	0.342	190	0.1300	0.1530	W23
W0735RA150	1500	735	9000	405 × 10³	0.790	0.342	190	0.1300	0.1530	W23
W0735SA120	1200	735	9000	405 × 10³	0.790	0.342	190	0.1300	0.1530	W23
W0735SA150	1500	735	9000	405 × 10³	0.790	0.342	190	0.1300	0.1530	W23

Fast Recovery Diodes

Fast recovery diodes are an essential component of any switching device and often represent a limiting factor in the design and performance of modern power converters. To address broad market requirements, we have developed a comprehensive range of fast recovery diodes. These diodes are available with blocking voltages of up to 6.5 kV, making them suitable for operation with DC link voltages up to 3.3 kV. Depending on the device type, they provide average current ratings to 4305 A. The devices utilize both alloyed and floating silicon technologies to deliver robust and reliable operation in demanding applications. For easier selection, the products are categorized into: Fast Recovery, Soft Recovery, Extra Fast Recovery Diodes, and HP Sonic-FRDs.




W2
Weight 80 g



W3
Weight 140 g



W4
Weight 340 g



W5
Weight 510 g



W6
Weight 1 kg



W37
Weight 510 g



W43
Weight 800 g

Standard Fast Recovery—Capsule Types

These parts are well suited for use as anti-parallel diodes in Gate Turn-Off thyristors, Fast Thyristor inverters, and diodes for choppers.




Part Number	V _{RRM}	I _{FAV}	I _{FSM}	I ² t	Typ. Reverse Recovery				V _{TO}	r _T	T _{JM}	R _{thJK} d.c. 180° sine	Fig. No.
		T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}	T _J = 150 °C				@T _{JM} = 150 °C					
				t _{rr}	Q _{rr}	@ I _{FM}	@ -di/dt						
	V	A	A	A²s	µs	µC	A	A/µs	V	mΩ	°C	K/W	
M0588LC400	4000	588	3955	78.2 × 10³	3.50	450	1000	60	2.320	1.770	150	0.0330	W4
M0588LC450	4500	588	3955	78.2 × 10³	3.50	450	1000	60	2.320	1.770	150	0.0330	W4
M0790YC200	2000	790	9000	405 × 10³	4.00	425	1000	60	1.272	0.584	150	0.0500	W2
M0790YC250	2500	790	9000	405 × 10³	4.00	425	1000	60	1.272	0.584	150	0.0500	W2
M0790YH200	2000	790	9000	405 × 10³	4.00	425	1000	60	1.272	0.584	150	0.0500	W3
M0790YH250	2500	790	9000	405 × 10³	4.00	425	1000	60	1.272	0.584	150	0.0500	W3
M0914LC200	2000	914	8500	361 × 10³	3.20	300	1000	60	1.768	0.653	150	0.0320	W4
M0914LC250	2500	914	8500	361 × 10³	3.20	300	1000	60	1.768	0.653	150	0.0320	W4
M1010NC400	4000	1010	9600	461 × 10³	3.20	1450	1000	200	1.700	1.030	150	0.0220	W5
M1010NC450	4500	1010	9600	461 × 10³	3.20	1450	1000	200	1.700	1.030	150	0.0220	W5
M1010ND400	4000	1010	9600	461 × 10³	3.20	1450	1000	200	1.700	1.030	150	0.0220	W37
M1010ND450	4500	1010	9600	461 × 10³	3.20	1450	1000	200	1.700	1.030	150	0.0220	W37
M1163NC400	4000	1163	10800	583 × 10³	6.40	1200	1000	60	1.500	0.770	150	0.0220	W5
M1163NC450	4500	1163	10800	583 × 10³	6.40	1200	1000	60	1.500	0.770	150	0.0220	W5
M1163ND400	4000	1163	10800	583 × 10³	6.40	1200	1000	60	1.500	0.770	150	0.0220	W37
M1163ND450	4500	1163	10800	583 × 10³	6.40	1200	1000	60	1.500	0.770	150	0.0220	W37
M1502NC200	2000	1502	17000	1.45 × 10⁶	3.50	350	1000	60	1.240	0.440	150	0.0220	W5
M1502NC250	2500	1502	17000	1.45 × 10⁶	3.50	350	1000	60	1.240	0.440	150	0.0220	W5
M1502ND200	2000	1502	17000	1.45 × 10⁶	3.50	350	1000	60	1.240	0.440	150	0.0220	W37
M1502ND250	2500	1502	17000	1.45 × 10⁶	3.50	350	1000	60	1.240	0.440	150	0.0220	W37
M1583VC400	4000	1583	24800	3.08 × 10⁶	5.00	2000	1000	200	1.693	0.525	150	0.0160	W6
M1583VC450	4500	1583	24800	3.08 × 10⁶	5.00	2000	1000	200	1.693	0.525	150	0.0160	W6
M1583VF400	4000	1583	24800	3.08 × 10⁶	5.00	2000	1000	200	1.693	0.525	150	0.0160	W43
M1583VF450	4500	1583	24800	3.08 × 10⁶	5.00	2000	1000	200	1.693	0.525	150	0.0160	W43

High-Power Devices



W5
Weight 510 g



W42
Weight 1.2 kg



W20
Weight 85 g



W23
Weight 250 g



W6
Weight 1 kg



W43
Weight 800 g



W21
Weight 85 g



W24
Weight 250 g



W7
Weight 1.7 kg



W121
Weight 330 g



W22
Weight 200 g



W37
Weight 510 g

Standard Fast Recovery—Capsule Types

These parts are well suited for use as anti-parallel diodes in Gate Turn-Off thyristors, Fast Thyristor inverters, and diodes for choppers.



Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	Typ. Reverse Recovery				V _{T0}	r _T	T _{JM}	R _{thJK} d.c. 180° sine	Fig. No.
			10 ms ½ sine V _R ≤ 60% V _{RRM}		T _J = 150 °C				@ T _{JM} = 150 °C				
					t _{rr}	Q _{rr}	@ I _{FM}	@ -di _F /dt					
	V	A	A	A ² s	µs	µC	A	A/µs	V	mΩ	°C	K/W	
M1609NC200	2000	1609	17500	1.53 × 10 ⁶	3.20	800	1000	200	1.310	0.345	150	0.0220	W5
M1609NC260	2600	1609	17500	1.53 × 10 ⁶	3.20	800	1000	200	1.310	0.345	150	0.0220	W5
M1609ND200	2000	1609	17500	1.53 × 10 ⁶	3.20	800	1000	200	1.310	0.345	150	0.0220	W37
M1609ND260	2600	1609	17500	1.53 × 10 ⁶	3.20	800	1000	200	1.310	0.345	150	0.0220	W37
M2273VC300	3000	2273	28000	3.92 × 10 ⁶	8.50	2500	1000	60	1.239	0.244	150	0.0160	W6
M2273VC360	3600	2273	28000	3.92 × 10 ⁶	8.50	2500	1000	60	1.239	0.244	150	0.0160	W6
M2273VF300	3000	2273	28000	3.92 × 10 ⁶	8.50	2500	1000	60	1.239	0.244	150	0.0160	W43
M2273VF360	3600	2273	28000	3.92 × 10 ⁶	8.50	2500	1000	60	1.239	0.244	150	0.0160	W43
M2325HA400	4000	2325	28000	3.92 × 10 ⁶	5.40	2300	1000	200	1.581	0.402	150	0.0105	W121
M2325HA450	4500	2325	28000	3.92 × 10 ⁶	5.40	2300	1000	200	1.581	0.402	150	0.0105	W121
M2408NC020	200	2408	24000	2.88 × 10 ⁶	1.90	250	1000	200	1.065	0.122	150	0.0220	W5
M2408NC060	600	2408	24000	2.88 × 10 ⁶	1.90	250	1000	200	1.065	0.122	150	0.0220	W5
M2408ND020	200	2408	24000	2.88 × 10 ⁶	1.90	250	1000	200	1.065	0.122	150	0.0220	W37
M2408ND060	600	2408	24000	2.88 × 10 ⁶	1.90	250	1000	200	1.065	0.122	150	0.0220	W37
M2639ZC360	3600	2639	27520	3.79 × 10 ⁶	8.50	2300	1000	60	1.380	0.290	150	0.0110	W7
M2639ZC420	4200	2639	27520	3.79 × 10 ⁶	8.50	2300	1000	60	1.380	0.290	150	0.0110	W7
M2639ZD360	3600	2639	27520	3.79 × 10 ⁶	8.50	2300	1000	60	1.380	0.290	150	0.0110	W42
M2639ZD420	4200	2639	27520	3.79 × 10 ⁶	8.50	2300	1000	60	1.380	0.290	150	0.0110	W42
M2698ZC250	2500	2698	27800	3.86 × 10 ⁶	6.20	1200	1000	60	1.000	0.330	150	0.0110	W7
M2698ZC280	2800	2698	27800	3.86 × 10 ⁶	6.20	1200	1000	60	1.000	0.330	150	0.0110	W7
M2698ZC350	3500	2698	27800	3.86 × 10 ⁶	6.20	1200	1000	60	1.000	0.330	150	0.0110	W7
M2698ZD250	2500	2698	27800	3.86 × 10 ⁶	6.20	1200	1000	60	1.000	0.330	150	0.0110	W42
M2698ZD280	2800	2698	27800	3.86 × 10 ⁶	6.20	1200	1000	60	1.000	0.330	150	0.0110	W42
M2698ZD350	3500	2698	27800	3.86 × 10 ⁶	6.20	1200	1000	60	1.000	0.330	150	0.0110	W42
M2837VC180	1800	2837	31800	5.10 × 10 ⁶	7.00	2100	1000	60	0.900	0.170	150	0.0160	W6
M2837VC250	2500	2837	31800	5.10 × 10 ⁶	7.00	2100	1000	60	0.900	0.170	150	0.0160	W6
M2837VF180	1800	2837	31800	5.10 × 10 ⁶	7.00	2100	1000	60	0.900	0.170	150	0.0160	W43
M2837VF250	2500	2837	31800	5.10 × 10 ⁶	7.00	2100	1000	60	0.900	0.170	150	0.0160	W43
M3770ZC200	2000	3770	44000	9.68 × 10 ⁶	7.00	2000	1000	60	1.190	0.118	150	0.0110	W7
M3770ZC240	2400	3770	44000	9.68 × 10 ⁶	7.00	2000	1000	60	1.190	0.118	150	0.0110	W7
M3770ZC300	3000	3770	44000	9.68 × 10 ⁶	7.00	2000	1000	60	1.190	0.118	150	0.0110	W7
M3770ZD200	2000	3770	44000	9.68 × 10 ⁶	7.00	2000	1000	60	1.190	0.118	150	0.0110	W7
M3770ZD240	2400	3770	44000	9.68 × 10 ⁶	7.00	2000	1000	60	1.190	0.118	150	0.0110	W42
M3770ZD300	3000	3770	44000	9.68 × 10 ⁶	7.00	2000	1000	60	1.190	0.118	150	0.0110	W42

Soft Recovery Diodes

Our soft recovery diodes are available in a range of reverse recovery characteristics tailored to meet the requirements of both freewheeling and snubber applications. These devices are available with blocking voltages up to 6 kV and average currents up to 4305 A in 24 mm to 75 mm diameter silicon die. These parts are well suited for applications requiring soft recovery, such as in RCD snubbers, voltage clamping, and snubberless applications.

Soft Recovery Diodes—Stud Types



S




R

Part Number	V _{RRM}	I _{FAV} T _C = 55 °C	I _{FSM}	I ² t	Typ. Reverse Recovery				V _{T0}	r _T	T _{JM}	R _{thJK} d.c. 180° sine	Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		T _J = 150 °C				@ T _{JM}				
					t _{rr}	Q _{rr}	@I _{FM}	@ -di _r /dt					
V	A	A	A ² s	μs	μC	A	A/μs	V	mΩ	°C	K/W		
M0130RL200	2000	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W20
M0130RL250	2500	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W20
M0130SL200	2000	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W20
M0130SL250	2500	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W20
M0130RM200	2000	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W21
M0130RM250	2500	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W21
M0130SM200	2000	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W21
M0130SM250	2500	130	2240	25.0 × 10 ³	2.60	430	1000	150	1.290	1.540	125	0.3000	W21
M0139RL120	1200	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W20
M0139RL180	1800	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W20
M0139SL120	1200	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W20
M0139SL180	1800	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W20
M0139RM120	1200	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W21
M0139RM180	1800	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W21
M0139SM120	1200	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W21
M0139SM180	1800	139	2450	30.0 × 10 ³	1.00	125	1000	100	1.240	1.280	125	0.3000	W21
M0268RC200	2000	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W24
M0268RC250	2500	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W24
M0268SC200	2000	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W24
M0268SC250	2500	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W24
M0268RJ200	2000	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W22
M0268RJ250	2500	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W22
M0268SJ200	2000	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W22
M0268SJ250	2500	268	4250	90.3 × 10 ³	2.80	300	1000	150	1.210	1.200	125	0.1300	W22
M0280RC200	2000	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W24
M0280RC250	2500	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W24
M0280SC200	2000	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W24
M0280SC250	2500	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W24
M0280RJ200	2000	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W22
M0280RJ250	2500	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W22
M0280SJ200	2000	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W22
M0280SJ250	2500	280	4500	100 × 10 ³	2.80	610	1000	150	1.280	0.920	125	0.1300	W22
M0334RC120	1200	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W24
M0334RC200	2000	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W24
M0334SC120	1200	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W24
M0334SC200	2000	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W24
M0334RJ120	1200	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W22
M0334RJ200	2000	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W22
M0334SJ120	1200	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W22
M0334SJ200	2000	334	4500	101 × 10 ³	3.50	160	550	40	1.000	0.740	125	0.1300	W22
M0336RA120	1200	336	4500	101 × 10 ³	3.00	140	550	40	1.020	0.700	125	0.1300	W23
M0336RA140	1400	336	4500	101 × 10 ³	3.00	140	550	40	1.020	0.700	125	0.1300	W23
M0336SA120	1200	336	4500	101 × 10 ³	3.00	140	550	40	1.020	0.700	125	0.1300	W23
M0336SA140	1400	336	4500	101 × 10 ³	3.00	140	550	40	1.020	0.700	125	0.1300	W23


High-Power Devices



W1
Weight 70 g



W5
Weight 510 g



W42
Weight 1.2 kg




WD8
Weight 250 g




W2
Weight 80 g



W6
Weight 1 kg



W43
Weight 800 g



W3
Weight 140 g



W7
Weight 1.7 kg



W54
Weight 530 g



W4
Weight 340 g



W37
Weight 510 g



W89
Weight 1.3 kg



Soft Recovery Diode—Capsule Types

Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	Typ. Reverse Recovery				V _{T0}	r _T	T _{JM}	R _{thJK} d.c. 180° sine	Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		T _{JM}				@T _{JM}				
					t _{rr}	Q _{rr}	@ I _{FM}	@ -di _F /dt					
V	A	A	A ² s	μs	μC	A	A/μs	V	mΩ	°C	K/W		
M0225YH300	3000	225	2000	20 × 10 ³	3.00	220	550	40	1.900	4.160	150	0.1000	W3
M0225YH360	3600	225	2000	20 × 10 ³	3.00	220	550	40	1.900	4.160	150	0.1000	W3
M0225YH450	4500	225	2000	20 × 10 ³	3.00	220	550	40	1.900	4.160	150	0.1000	W3
M0310YH300	3000	310	4590	105 × 10 ³	2.80	275	1000	100	1.490	2.060	150	0.1000	W3
M0310YH350	3500	310	4590	105 × 10 ³	2.80	275	1000	100	1.490	2.060	150	0.1000	W3
M0347WC160	1600	347	4250	90.3 × 10 ³	2.80	210	550	40	1.210	1.200	125	0.0900	W1
M0347WC200	2000	347	4250	90.3 × 10 ³	2.80	210	550	40	1.210	1.200	125	0.0900	W1
M0347WC250	2500	347	4250	90.3 × 10 ³	2.80	210	550	40	1.210	1.200	125	0.0900	W1
M0358WC120	1200	358	2450	30 × 10 ³	1.40	125	1000	100	1.460	0.800	125	0.0900	W1
M0358WC180	1800	358	2450	30 × 10 ³	1.40	125	1000	100	1.460	0.800	125	0.0900	W1
M0367WC140	1400	367	4500	101 × 10 ³	3.30	300	550	40	1.280	0.920	125	0.0900	W1
M0367WC220	2200	367	4500	101 × 10 ³	3.30	300	550	40	1.280	0.920	125	0.0900	W1
M0367WC280	2800	367	4500	101 × 10 ³	3.30	300	550	40	1.280	0.920	125	0.0900	W1
M0371YH350	3500	371	4900	120 × 10 ³	3.20	1260	1000	200	1.050	1.650	150	0.1000	W3
M0371YH450	4500	371	4900	120 × 10 ³	3.20	1260	1000	200	1.050	1.650	150	0.1000	W3
M0433WC120	1200	433	4500	101 × 10 ³	3.50	270	550	40	1.000	0.740	125	0.0900	W1
M0433WC160	1600	433	4500	101 × 10 ³	3.50	270	550	40	1.000	0.740	125	0.0900	W1
M0433WC200	2000	433	4500	101 × 10 ³	3.50	270	550	40	1.000	0.740	125	0.0900	W1
M0437WC080	800	437	4500	101 × 10 ³	3.00	75	550	40	1.020	0.700	125	0.0900	W1
M0437WC140	1400	437	4500	101 × 10 ³	3.00	75	550	40	1.020	0.700	125	0.0900	W1
M0451YC120	1200	451	4500	101 × 10 ³	2.80	120	550	40	1.000	0.740	125	0.0850	W2
M0451YC160	1600	451	4500	101 × 10 ³	2.80	120	550	40	1.000	0.740	125	0.0850	W2
M0451YC200	2000	451	4500	101 × 10 ³	2.80	120	550	40	1.000	0.740	125	0.0850	W2
M0659LC400	4000	659	7620	290 × 10 ³	4.20	800	1000	60	1.710	0.925	125	0.0330	W4
M0659LC450	4500	659	7620	290 × 10 ³	4.20	800	1000	60	1.710	0.925	125	0.0330	W4
M0710LC560	5600	710	8400	353 × 10 ³	4.00	2100	1000	200	1.450	0.875	125	0.0330	W4
M0710LC600	6000	710	8400	353 × 10 ³	4.00	2100	1000	200	1.450	0.875	125	0.0330	W4
M0736LC400	4000	736	9000	405 × 10 ³	5.20	1250	1000	60	1.606	0.700	125	0.0330	W4
M0736LC450	4500	736	9000	405 × 10 ³	5.20	1250	1000	60	1.606	0.700	125	0.0330	W4
M0759YC120	1200	759	9500	450 × 10 ³	2.00	80	550	50	1.130	0.380	125	0.0500	W2
M0759YC160	1600	759	9500	450 × 10 ³	2.00	80	550	50	1.130	0.380	125	0.0500	W2
M0759YH120	1200	759	9500	450 × 10 ³	2.00	80	550	50	1.130	0.380	125	0.0500	W3
M0759YH160	1600	759	9500	450 × 10 ³	2.00	80	550	50	1.130	0.380	125	0.0500	W3
M0859LC140	1400	859	10000	500 × 10 ³	3.00	280	800	50	1.170	0.320	125	0.0440	W4
M0859LC160	1600	859	10000	500 × 10 ³	3.00	280	800	50	1.170	0.320	125	0.0440	W4
M0859LC180	1800	859	10000	500 × 10 ³	3.00	280	800	50	1.170	0.320	125	0.0440	W4

Soft Recovery Diode–Capsule Types



Part Number	V _{RRM}	I _{FAV} T _K = 55 °C	I _{FSM}	I ² t	Typ. Reverse Recovery				V _{T0}	r _T	T _{JM}	R _{thJK} d.c. 180° sine	Fig. No.
			10 ms ½ sine V _R - ≤60% V _{RRM}		T _{JM}				@T _{JM}				
					t _{tr}	Q _{tr}	@ I _{FM}	@ -di _F /dt					
			V	A	A	A²s	µs	µC	A	A/µs			
M0863LC260	2600	863	10000	500 × 10³	4.80	950	1000	60	1.308	0.538	125	0.0330	W4
M0863LC300	3000	863	10000	500 × 10³	4.80	950	1000	60	1.308	0.538	125	0.0330	W4
M0863LC360	3600	863	10000	500 × 10³	4.80	950	1000	60	1.308	0.538	125	0.0330	W4
M0872LC140	1400	872	10000	500 × 10³	4.00	700	1000	60	1.090	0.340	125	0.0440	W4
M0872LC180	1800	872	10000	500 × 10³	4.00	700	1000	60	1.090	0.340	125	0.0440	W4
M0872LC210	2100	872	10000	500 × 10³	4.00	700	1000	60	1.090	0.340	125	0.0440	W4
M0955LC200	2000	955	11700	684 × 10³	3.40	500	1000	60	1.440	0.330	125	0.0330	W4
M0955LC250	2500	955	11700	684 × 10³	3.40	500	1000	60	1.440	0.330	125	0.0330	W4
M1022LC120	1200	1022	14000	980 × 10³	3.00	375	1000	60	1.240	0.330	125	0.0330	W4
M1022LC160	1600	1022	14000	980 × 10³	3.00	375	1000	60	1.240	0.330	125	0.0330	W4
M1022LC200	2000	1022	14000	980 × 10³	3.00	375	1000	60	1.240	0.330	125	0.0330	W4
M1080LC100	1000	1080	13500	910 × 10³	1.90	85	1000	60	1.125	0.314	125	0.0330	W4
M1080LC120	1200	1080	13500	910 × 10³	1.90	85	1000	60	1.125	0.314	125	0.0330	W4
M1102NC500	5000	1102	13000	845 × 10³	5.50	3300	1000	200	1.360	0.557	125	0.0220	W5
M1102NC600	6000	1102	13000	845 × 10³	5.50	3300	1000	200	1.360	0.557	125	0.0220	W5
M1102ND500	5000	1102	13000	845 × 10³	5.50	3300	1000	200	1.360	0.557	125	0.0220	W37
M1102ND600	6000	1102	13000	845 × 10³	5.50	3300	1000	200	1.360	0.557	125	0.0220	W37
M1104NC400	4000	1104	13000	845 × 10³	6.00	2100	1000	60	1.370	0.553	125	0.0220	W5
M1104NC450	4500	1104	13000	845 × 10³	6.00	2100	1000	60	1.370	0.553	125	0.0220	W5
M1104ND400	4000	1104	13000	845 × 10³	6.00	2100	1000	60	1.370	0.553	125	0.0220	W37
M1104ND450	4500	1104	13000	845 × 10³	6.00	2100	1000	60	1.370	0.553	125	0.0220	W37
M1242NC260	2600	1242	16400	1.34 × 10 ⁶	6.00	1500	1000	60	1.270	0.420	125	0.0220	W5
M1242NC360	3600	1242	16400	1.34 × 10 ⁶	6.00	1500	1000	60	1.270	0.420	125	0.0220	W5
M1242ND260	2600	1242	16400	1.34 × 10 ⁶	6.00	1500	1000	60	1.270	0.420	125	0.0220	W37
M1242ND360	3600	1242	16400	1.34 × 10 ⁶	6.00	1500	1000	60	1.270	0.420	125	0.0220	W37
M1494NC160	1600	1494	19600	1.92 × 10 ⁶	3.90	815	1000	60	1.150	0.265	125	0.0220	W5
M1494NC250	2500	1494	19600	1.92 × 10 ⁶	3.90	815	1000	60	1.150	0.265	125	0.0220	W5
M1494ND160	1600	1494	19600	1.92 × 10 ⁶	3.90	815	1000	60	1.150	0.265	125	0.0220	W37
M1494ND250	2500	1494	19600	1.92 × 10 ⁶	3.90	815	1000	60	1.150	0.265	125	0.0220	W37
M1494NK160	1600	1494	19600	1.92 × 10 ⁶	3.90	815	1000	60	1.150	0.265	125	0.0145	WD8
M1494NK250	2500	1494	19600	1.92 × 10 ⁶	3.90	815	1000	60	1.150	0.265	125	0.0145	WD8
M1565VC400	4000	1565	19700	1.94 × 10 ⁶	5.00	4000	1000	200	1.090	0.360	125	0.0180	W6
M1565VC450	4500	1565	19700	1.94 × 10 ⁶	5.00	4000	1000	200	1.090	0.360	125	0.0180	W6
M1565VF400	4000	1565	19700	1.94 × 10 ⁶	5.00	4000	1000	200	1.090	0.360	125	0.0180	W43
M1565VF450	4500	1565	19700	1.94 × 10 ⁶	5.00	4000	1000	200	1.090	0.360	125	0.0180	W43
M1858NC100	1000	1858	25000	3.25 × 10 ⁶	2.50	120	1000	60	1.127	0.127	125	0.0220	W5
M1858NC120	1200	1858	25000	3.25 × 10 ⁶	2.50	120	1000	60	1.127	0.127	125	0.0220	W5
M1858ND120	1200	1858	25000	3.25 × 10 ⁶	2.50	120	1000	60	1.127	0.127	125	0.0220	W37
M1858ND100	1000	1858	25000	3.25 × 10 ⁶	2.50	120	1000	60	1.127	0.127	125	0.0220	W37
M2322ZC300	3000	2322	23000	2.64 × 10 ⁶	6.50	3200	1000	150	1.670	0.186	125	0.0110	W7
M2322ZC400	4000	2322	23000	2.64 × 10 ⁶	6.50	3200	1000	150	1.670	0.186	125	0.0110	W7
M2322ZD300	3000	2322	23000	2.64 × 10 ⁶	6.50	3200	1000	150	1.670	0.186	125	0.0110	W42
M2322ZD400	4000	2322	23000	2.64 × 10 ⁶	6.50	3200	1000	150	1.670	0.186	125	0.0110	W42
M2413VC200	2000	2413	32000	5.12 × 10 ⁶	5.00	2500	1000	200	1.090	0.121	125	0.0160	W6
M2413VC250	2500	2413	32000	5.12 × 10 ⁶	5.00	2500	1000	200	1.090	0.121	125	0.0160	W6
M2413VF200	2000	2413	32000	5.12 × 10 ⁶	5.00	2500	1000	200	1.090	0.121	125	0.0160	W43
M2413VF250	2500	2413	32000	5.12 × 10 ⁶	5.00	2500	1000	200	1.090	0.121	125	0.0160	W43
M2505MC220	2200	2505	27000	3.65 × 10 ⁶	7.60	1950	2000	60	0.991	0.162	125	0.0140	W54
M2505MC250	2500	2505	27000	3.65 × 10 ⁶	7.60	1950	2000	60	0.991	0.162	125	0.0140	W54
M3560TJ420	4200	3560	36000	6.48 × 10 ⁶	7.00	4100	1000	150	1.253	0.137	125	0.0080	W89
M3560TJ450	4500	3560	36000	6.48 × 10 ⁶	7.00	4100	1000	150	1.253	0.137	125	0.0080	W89
M4305TJ240	2400	4305	49000	12.0 × 10 ⁶	5.00	2500	1000	150	1.104	0.087	125	0.0080	W89
M4305TJ280	2800	4305	49000	12.0 × 10 ⁶	5.00	2500	1000	150	1.104	0.087	125	0.0080	W89

Extra Fast Recovery Diodes


These products are engineered to minimize the the lowest practical values of reverse recovery current while maintaining a wide safe operating area and high di/dt capability required by modern switching parts.



W1
Weight 70 g



W6
Weight 1 kg



W89
Weight 1.3 kg




W2
Weight 80 g



W43
Weight 800 g




W111
Weight 1.6 kg



W3
Weight 140 g



W47
Weight 250 g




W117
Weight 330 g



W4
Weight 340 g



W54
Weight 530 g



W122
Weight 1.2 kg



W5
Weight 510 g



W59
Weight 2.25 kg



W126
Weight 1.15 kg

Extra Fast Recovery Diodes—Capsule Types

Part Number	V _{RRM}	I _{FAV}	I _{FSM}	I ² t	Typ. Reverse Recovery					V _{T0}	r _T	T _{JM}	R _{thJK} d.c. 180° sine	Fig. No.
		T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}	T _{JM}					@T _{JM}					
				I _{rm}	t _{rr}	Q _{rr}	@ I _{FM}	@ -di _F /dt						
	V	A	A	A ² s	A	µs	µC	A	A/µs	V	mΩ	°C	K/W	
F0240YC250	2500	240	3100	48.1 × 10 ³	40	2.00	100	550	40	2.271	2.853	150	0.1000	W2
F0240YC300	3000	240	3100	48.1 × 10 ³	40	2.00	100	550	40	2.271	2.853	150	0.1000	W2
F0240YH250	2500	240	3100	48.1 × 10 ³	40	2.00	100	550	40	2.271	2.853	150	0.1000	W3
F0240YH300	3000	240	3100	48.1 × 10 ³	40	2.00	100	550	40	2.271	2.853	150	0.1000	W3
F0300WC140	1400	240	2700	36.5 × 10 ³	530	3.00	70	550	40	1.760	2.210	125	0.0950	W1
F0300WC180	1800	240	2700	36.5 × 10 ³	530	3.00	70	550	40	1.760	2.210	125	0.0950	W1
F0800LC140	1400	775	7630	291 × 10 ³	380	1.10	200	1000	200	1.494	0.692	125	0.0320	W4
F0800LC180	1800	775	7630	291 × 10 ³	380	1.10	200	1000	200	1.494	0.692	125	0.0320	W4
F0900VC450	4500	816	10450	546 × 10 ³	120	3.80	230	1000	60	2.024	1.274	115	0.0160	W6
F0900VC520	5200	816	10450	546 × 10 ³	120	3.80	230	1000	60	2.024	1.274	115	0.0160	W6
F0900VF450	4500	816	10450	546 × 10 ³	120	3.80	230	1000	60	2.024	1.274	115	0.0160	W43
F0900VF520	5200	816	10450	546 × 10 ³	120	3.80	230	1000	60	2.024	1.274	115	0.0160	W43
F1000LC080	800	826	8500	361 × 10 ³	320	1.60	250	1000	800	1.530	0.547	125	0.0320	W4
F1000LC120	1200	826	8500	361 × 10 ³	320	1.60	250	1000	800	1.530	0.547	125	0.0320	W4
F1300NC45P	4500	1346	20800	2.16 × 10 ⁶	470	4.30	2150	1000	200	1.569	0.318	140	0.0240	W5
F1300NC50P	5000	1346	20800	2.16 × 10 ⁶	470	4.30	2150	1000	200	1.569	0.318	140	0.0240	W5
F1300NC55P	5500	1346	20800	2.16 × 10 ⁶	470	4.30	2150	1000	200	1.569	0.318	140	0.0240	W5
F1400NC140	1400	1093	17250	1.49 × 10 ⁶	800	1.50	1000	1400	1000	1.618	0.388	125	0.0240	W5
F1400NC180	1800	1093	17250	1.49 × 10 ⁶	800	1.50	1000	1400	1000	1.618	0.388	125	0.0240	W5
F1500NC200	2000	1054	13750	950 × 10 ³	1065	1.50	1500	1500	2000	1.372	0.535	125	0.0240	W5
F1500NC250	2500	1054	13750	950 × 10 ³	1065	1.50	1500	1500	2000	1.372	0.535	125	0.0240	W5
F1600NC080	800	1326	20000	2.0 × 10 ⁶	480	2.30	700	1600	800	1.320	0.268	125	0.0240	W5
F1600NC120	1200	1326	20000	2.0 × 10 ⁶	480	2.30	700	1600	800	1.320	0.268	125	0.0240	W5

High-Power Sonic FRDs

Littelfuse brings you a world-leading class of ultra fast and ultra soft recovery diode available from 4.5 kV to 6.5 kV in current ratings from 500 A to 4000 A. These diodes incorporate a unique manufacturing process and lifetime control to offer an optimal balance between conduction and switching losses. The wide safe operating area (SOA) makes them ideal as freewheeling diodes for snubberless IGBT and IGCT applications or any application that requires a fast, low loss diode (e.g., traction, medium voltage drives, induction heating, and pulsed power applications).

High-Power Sonic FRD's – Capsule Type

Part Number	V _{RRM}	I _{FAV}	I _{FSM}	I ² t	Typ. Reverse Recovery					V _{T0}	r _T	T _{JM}	R _{thJK} 180° sine	Fig. No.
		T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}	T _{JM}					@ T _{JM}					
				I _{rrm}	t _{rr}	Q _{rr}	@ I _{FM}	@ -di _F /dt						
											V			
E0460QC45E	4500	533	6800	231 × 10 ³	460	1.15	685	500	1000	2.246	2.716	140	0.0274	W117
E0660NC45E	4500	760	9160	420 × 10 ³	700	1.10	1050	660	1500	2.194	1.814	140	0.0200	W5
E0660NH45E	4500	760	9160	420 × 10 ³	700	1.10	1050	660	1500	2.194	1.814	140	0.0200	W47
E1250HC45E	4500	1355	20500	2.11 × 10 ⁶	1000	1.20	1850	1250	2000	2.072	1.166	140	0.0105	W122
E1500NC42P	4200	1280	17050	1.45 × 10 ⁶	1425	2.80	2750	1000	1000	1.417	0.656	140	0.0190	W5
E1500NC48P	4800	1280	17050	1.45 × 10 ⁶	1425	2.80	2750	1000	1000	1.417	0.656	140	0.0190	W5
E1500NH42P	4200	1280	17050	1.45 × 10 ⁶	1425	2.80	2750	1000	1000	1.417	0.656	140	0.0190	W47
E1500NH48P	4800	1280	17050	1.45 × 10 ⁶	1425	2.80	2750	1000	1000	1.417	0.656	140	0.0190	W47
E1780TG65E	6500	1780	25600	3.29 × 10 ⁶	1590	1.22	3500	1375	3500	2.200	0.917	140	0.0770	W126
E1800TC45E	4500	2215	29050	4.22 × 10 ⁶	1490	1.15	2800	1800	3000	2.171	0.634	140	0.0068	W89
E2400EC45E	4500	2490	32100	5.15 × 10 ⁶	2130	1.22	3900	2400	4000	2.114	0.646	140	0.0056	W111
E3000EC45E	4500	3410	45700	10.5 × 10 ⁶	3050	1.25	5000	3000	5000	2.124	0.339	140	0.0050	W111
E4000FD45E	4500	4210	54800	15.0 × 10 ⁶	3650	1.50	5750	4000	5000	2.117	0.351	140	0.0035	W59

High-Power Devices

Phase Control Thyristors

Littelfuse provides one of the most comprehensive ranges of standard phase control thyristors in the industry. Devices are available with voltage ratings from 200 V to 5200 V, making them suitable for applications with line voltages from 230 V to over 1000 V (For applications requiring voltages above 5.2 kV, please refer to our Medium Voltage Thyristor range). Littelfuse is a leading supplier of phase control products for markets such as industrial DC drives, controlled rectifiers, marine/rail propulsion systems, wind power converters, electrochemical power supplies, and soft starters. These devices are optimized for low conduction losses and are primarily intended for applications with line frequencies of up to 400 Hz.

The Wespack outline (WPxx) is an innovative concept in phase control thyristors for applications requiring devices rated up to 2200 V. It delivers the maximum power density without compromising on reliability, while also providing the maximum current rating and lowest thermal resistance for the package size.


The newest additions to the Littelfuse phase control thyristor portfolio are the 96 mm diameter die capsules. These devices are constructed using low temperature sintering technology offering better thermal and electromechanical capability. Devices are available with current ratings up to 6405 A and voltage ratings up to 4500 V.



W8
Weight 70 g



W12
Weight 1 kg



W70
Weight 550 g



WP6
Weight 330 g



W10
Weight 340 g



W58
Weight 90 g



WP1
Weight 180 g




W17
Weight 130 g



W11
Weight 510 g



W62
Weight 1 kg



WP2
Weight 200 g



W18
Weight 280 g

Phase Control Thyristors—Stud Types

Part Number	V_{DRM}	I_{TAV}	I_{TSM}	I^2t	V_{T0}	r_T	T_{JM}	R_{thJC}		Fig. No.
	V_{RRM}	$T_C = 55^\circ C$	10 ms $\frac{1}{2}$ sine $V_R \leq 60\% V_{RRM}$		@ T_{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ		°C	K/W	
N0180SH120	1200	180	2450	30.0×10^3	0.900	1.790	125	0.2300	0.2800	W17
N0180SH160	1600	180	2450	30.0×10^3	0.900	1.790	125	0.2300	0.2800	W17
N0335SC120	1200	335	4650	108×10^3	0.920	0.990	125	0.1200	0.1400	W18
N0335SC160	1600	335	4650	108×10^3	0.920	0.990	125	0.1200	0.1400	W18
N0416SC040	400	416	6000	180×10^3	0.850	0.535	125	0.1200	0.1400	W18
N0416SC080	800	416	6000	180×10^3	0.850	0.535	125	0.1200	0.1400	W18

Phase Control Thyristors—Capsule Types



Part Number	V_{DRM} V_{RRM}	I_{TAV}	I_{TSM}	I^2t	V_{TO}	r_T	T_{JM}	R_{thJC}		Fig. No.
		$T_k = 55\text{ }^{\circ}\text{C}$	10 ms $\frac{1}{2}$ sine $V_R \cdot \leq 60\% V_{RRM}$		@ T_{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ	°C	K/W	K/W	
N0392WC120	1200	392	4650	108×10^3	0.920	0.990	125	0.0950	0.1100	W8
N0392WC160	1600	392	4650	108×10^3	0.920	0.990	125	0.0950	0.1100	W8
N0606YC200	2000	606	7100	252×10^3	1.103	0.804	125	0.0500	0.0580	W58
N0606YC250	2500	606	7100	252×10^3	1.103	0.804	125	0.0500	0.0580	W58
N0616LC400	4000	616	5250	138×10^3	1.220	1.530	125	0.0320	0.0393	W10
N0616LC450	4500	616	5250	138×10^3	1.220	1.530	125	0.0320	0.0393	W10
N0634LC380	3800	634	7000	245×10^3	1.100	1.500	125	0.0320	0.0393	W10
N0634LC420	4200	634	7000	245×10^3	1.100	1.500	125	0.0320	0.0393	W10
N0646LC300	3000	646	5700	162×10^3	1.210	1.360	125	0.0320	0.0393	W10
N0646LC360	3600	646	5700	162×10^3	1.210	1.360	125	0.0320	0.0393	W10

Phase Control Thyristors—Capsule Types



Part Number	V_{DRM} V_{RRM}	I_{TAV}	I_{TSM}	I^2t	V_{T0}	r_T	T_{JM}	R_{thJC}		Fig. No.
		$T_k = 55^\circ C$	10 ms $\frac{1}{2}$ sine $V_R \cdot \leq 60\% V_{RRM}$		@ T_{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ	°C	K/W	K/W	
N0676YC120	1200	676	7500	281×10^3	1.090	0.587	125	0.0500	0.0580	W58
N0676YC180	1800	676	7500	281×10^3	1.090	0.587	125	0.0500	0.0580	W58
N0734YC120	1200	734	8400	353×10^3	1.03	0.483	125	0.0500	0.0580	W58
N0734YC160	1600	734	8400	353×10^3	1.03	0.483	125	0.0500	0.0580	W58
N0882NC400	4000	882	7700	296×10^3	1.300	0.920	125	0.0240	0.0273	W11
N0882NC450	4500	882	7700	296×10^3	1.300	0.920	125	0.0240	0.0273	W11
N0910LC200	2000	910	9200	423×10^3	1.040	0.606	125	0.0320	0.0393	W10
N0910LC260	2600	910	9200	423×10^3	1.040	0.606	125	0.0320	0.0393	W10
N0910LC280	2800	910	9200	423×10^3	1.040	0.606	125	0.0320	0.0393	W10
N1010NC300	3000	1010	12100	732×10^3	1.170	0.687	125	0.0240	0.0273	W11
N1010NC380	3800	1010	12100	732×10^3	1.170	0.687	125	0.0240	0.0273	W11
N1052LC200	2000	1052	13200	870×10^3	1.000	0.416	125	0.0320	0.0393	W10
N1052LC220	2200	1052	13200	870×10^3	1.000	0.416	125	0.0320	0.0393	W10
N1114LC120	1200	1114	12700	806×10^3	1.000	0.349	125	0.0320	0.0393	W10
N1114LC180	1800	1114	12700	806×10^3	1.000	0.349	125	0.0320	0.0393	W10
N1132NC300	3000	1132	14300	1.02×10^6	1.150	0.510	125	0.0240	0.0271	W11
N1132NC340	3400	1132	14300	1.02×10^6	1.150	0.510	125	0.0240	0.0271	W11
N1132NC360	3600	1132	14300	1.02×10^6	1.150	0.510	125	0.0240	0.0271	W11
N1159NC380	3800	1159	14500	1.05×10^6	1.100	0.574	125	0.0220	0.0255	W11
N1159NC420	4200	1159	14500	1.05×10^6	1.100	0.574	125	0.0220	0.0255	W11
N1174JK200	2000	1174	13200	870×10^3	1.000	0.416	125	0.0270	0.0314	WP1
N1174JK220	2200	1174	13200	870×10^3	1.000	0.416	125	0.0270	0.0314	WP1
N1263JK160	1600	1263	15000	1.13×10^6	1.015	0.332	125	0.0270	0.0314	WP1
N1263JK180	1800	1263	15000	1.13×10^6	1.015	0.332	125	0.0270	0.0314	WP1
N1351VC400	4000	1351	17500	1.53×10^6	1.200	0.553	125	0.0170	0.0206	W12
N1351VC450	4500	1351	17500	1.53×10^6	1.200	0.553	125	0.0170	0.0206	W12
N1351VF400	4000	1351	17500	1.53×10^6	1.200	0.553	125	0.0170	0.0206	W62
N1351VF450	4500	1351	17500	1.53×10^6	1.200	0.553	125	0.0170	0.0206	W62
N1366JK080	800	1366	15900	1.26×10^6	0.985	0.270	125	0.0270	0.0314	WP1
N1366JK120	1200	1366	15900	1.26×10^6	0.985	0.270	125	0.0270	0.0314	WP1
N1366JK140	1400	1366	15900	1.26×10^6	0.985	0.270	125	0.0270	0.0314	WP1
N1449QL200	2000	1410	17300	1.50×10^6	1.060	0.317	125	0.0230	0.0272	WP6
N1467NC200	2000	1467	21500	2.31×10^6	1.000	0.272	125	0.0240	0.0271	W11
N1467NC220	2200	1410	17300	1.50×10^6	1.060	0.317	125	0.0230	0.0272	W11
N1467NC260	2600	1467	21500	2.31×10^6	1.000	0.272	125	0.0240	0.0271	W11
N1547NC160	1600	1547	23300	2.71×10^6	0.920	0.252	125	0.0240	0.0271	W11
N1547NC200	2000	1547	23300	2.71×10^6	0.920	0.252	125	0.0240	0.0271	W11
N1581QL160	1600	1535	19100	1.82×10^6	1.022	0.253	125	0.0230	0.0270	WP6
N1581QL180	1800	1535	19100	1.82×10^6	1.022	0.253	125	0.0230	0.0270	WP6
N1651QK200	2000	1651	17300	1.50×10^6	1.060	0.317	125	0.0180	0.0217	WP2
N1651QK220	2200	1651	17300	1.50×10^6	1.060	0.317	125	0.0180	0.0217	WP2
N1661VC300	3000	1661	23000	2.65×10^6	1.040	0.350	125	0.0170	0.0206	W12
N1661VC360	3600	1661	23000	2.65×10^6	1.040	0.350	125	0.0170	0.0206	W12
N1661VF300	3000	1661	23000	2.65×10^6	1.040	0.350	125	0.0170	0.0206	W62
N1661VF360	3600	1661	23000	2.65×10^6	1.040	0.350	125	0.0170	0.0206	W62
N1718NC120	1200	1718	27200	3.70×10^6	0.979	0.169	125	0.0240	0.0271	W11
N1718NC180	1800	1718	27200	3.70×10^6	0.979	0.169	125	0.0240	0.0271	W11
N1718NC200	2000	1718	27200	3.70×10^6	0.979	0.169	125	0.0240	0.0271	W11
N1725MC320	3200	1725	20000	2.00×10^6	1.022	0.396	125	0.0150	0.0165	W70


High-Power Devices



W11
Weight 510 g



W62
Weight 1 kg



W81
Weight 1.2 kg




WP3
Weight 260 g



W12
Weight 1 kg



W70
Weight 550 g




W82
Weight 1.65 kg




WP5
Weight 500 g



W13
Weight 1.7 kg




W79
Weight 890 g




WP1
Weight 180 g



WP6
Weight 330 g



W46
Weight 1.2 kg



W80
Weight 1.2 kg



WP2
Weight 200 g



Phase Control Thyristors—Capsule Types

Part Number	V _{DRM} V _{RRM}	I _{TAV}	I _{TSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJC}		Fig. No.
		T _k = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}		@ T _{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ	°C	K/W	K/W	
N1725MC360	3600	1725	20000	2.00 × 10 ⁶	1.022	0.396	125	0.0150	0.0165	W70
N1802NC120	1200	1802	29600	4.38 × 10 ⁶	0.855	0.171	125	0.0240	0.0271	W11
N1802NC160	1600	1802	29600	4.38 × 10 ⁶	0.855	0.171	125	0.0240	0.0271	W11
N1806QK160	1600	1806	19100	1.82 × 10 ⁶	1.022	0.253	125	0.0180	0.0217	WP2
N1806QK180	1800	1806	19100	1.82 × 10 ⁶	1.022	0.253	125	0.0180	0.0217	WP2
N1817QL080	800	1760	22000	2.42 × 10 ⁶	0.955	0.177	125	0.0230	0.0272	WP6
N1817QL120	1200	1760	22000	2.42 × 10 ⁶	0.955	0.177	125	0.0230	0.0272	WP6
N1817QL140	1400	1760	22000	2.42 × 10 ⁶	0.955	0.177	125	0.0230	0.0272	WP6
N2015ML200	2000	2015	32400	5.25 × 10 ⁶	0.883	0.210	125	0.0180	0.0201	WP5
N2015ML220	2200	2015	32400	5.25 × 10 ⁶	0.883	0.210	125	0.0180	0.0201	WP5
N2055MC260	2600	2105	25800	3.33 × 10 ⁶	0.970	0.240	125	0.0150	0.0165	W70
N2055MC280	2800	2105	25800	3.33 × 10 ⁶	0.970	0.240	125	0.0150	0.0165	W70
N2055HE420	4200	2055	24000	2.88 × 10 ⁶	0.977	0.342	125	0.0125	0.0138	W80
N2055HE450	4500	2055	24000	2.88 × 10 ⁶	0.977	0.342	125	0.0125	0.0138	W80
N2083QK080	800	2083	22000	2.42 × 10 ⁶	0.955	0.177	125	0.0180	0.0217	WP2
N2083QK120	1200	2083	22000	2.42 × 10 ⁶	0.955	0.177	125	0.0180	0.0217	WP2
N2083QK140	1400	2083	22000	2.42 × 10 ⁶	0.955	0.177	125	0.0180	0.0217	WP2
N2086NC060	600	2086	35000	6.13 × 10 ⁶	0.840	0.108	125	0.0240	0.0271	W11
N2086NC100	1000	2086	35000	6.13 × 10 ⁶	0.840	0.108	125	0.0240	0.0271	W11
N2154JK020	200	2154	22700	2.58 × 10 ⁶	0.890	0.107	140	0.0270	0.0314	WP1
N2154JK040	400	2154	22700	2.58 × 10 ⁶	0.890	0.107	140	0.0270	0.0314	WP1
N2154JK060	600	2154	22700	2.58 × 10 ⁶	0.890	0.107	140	0.0270	0.0314	WP1
N2172ZC420	4200	2172	28000	3.92 × 10 ⁶	1.350	0.294	125	0.0110	0.0119	W13
N2172ZC450	4500	2172	28000	3.92 × 10 ⁶	1.350	0.294	125	0.0110	0.0119	W13
N2172ZD420	4200	2172	28000	3.92 × 10 ⁶	1.350	0.294	125	0.0110	0.0119	W46
N2172ZD450	4500	2172	28000	3.92 × 10 ⁶	1.350	0.294	125	0.0110	0.0119	W46
N2191ML160	1600	2191	34500	5.95 × 10 ⁶	0.940	0.154	125	0.0180	0.0201	WP5
N2191ML180	1800	2191	34500	5.95 × 10 ⁶	0.940	0.154	125	0.0180	0.0201	WP5
N2293VC180	1800	2293	33800	5.70 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W12
N2293VC220	2200	2293	33800	5.70 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W12
N2293VF180	1800	2293	33800	5.70 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W62
N2293VF220	2200	2293	33800	5.70 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W62
N2367MK200	2000	2367	32400	5.25 × 10 ⁶	0.883	0.210	125	0.0140	0.0157	WP3
N2367MK220	2200	2367	32400	5.25 × 10 ⁶	0.883	0.210	125	0.0140	0.0157	WP3
N2418ZC300	3000	2418	30000	4.50 × 10 ⁶	1.160	0.246	125	0.0110	0.0119	W13
N2418ZC360	3600	2418	30000	4.50 × 10 ⁶	1.160	0.246	125	0.0110	0.0119	W13
N2418ZD300	3000	2418	30000	4.50 × 10 ⁶	1.160	0.246	125	0.0110	0.0119	W46
N2418ZD360	3600	2418	30000	4.50 × 10 ⁶	1.160	0.246	125	0.0110	0.0119	W46

Phase Control Thyristors—Capsule Types




Part Number	V _{DRM} V _{RRM}	I _{TAV}	I _{TSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJC}		Fig. No.
		T _k = 55 °C	10 ms ½ sine V _R ≤ 60% V _{RRM}		@ T _{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ	°C	K/W	K/W	
N2500VC120	1200	2500	37000	6.85 × 10 ⁶	0.880	0.124	125	0.0170	0.0206	W12
N2500VC160	1600	2500	37000	6.85 × 10 ⁶	0.880	0.124	125	0.0170	0.0206	W12
N2500VF120	1200	2500	37000	6.85 × 10 ⁶	0.880	0.124	125	0.0170	0.0206	W62
N2500VF160	1600	2500	37000	6.85 × 10 ⁶	0.880	0.124	125	0.0170	0.0206	W62
N2520ML080	800	2520	38200	7.30 × 10 ⁶	0.980	0.090	125	0.0180	0.0201	WP5
N2520ML120	1200	2520	38200	7.30 × 10 ⁶	0.980	0.090	125	0.0180	0.0201	WP5
N2520ML140	1400	2520	38200	7.30 × 10 ⁶	0.980	0.090	125	0.0180	0.0201	WP5
N2543ZC240	2400	2543	32000	5.12 × 10 ⁶	0.780	0.274	125	0.0110	0.0119	W13
N2543ZC300	3000	2543	32000	5.12 × 10 ⁶	0.780	0.274	125	0.0110	0.0119	W13
N2543ZD240	2400	2543	32000	5.12 × 10 ⁶	0.780	0.274	125	0.0110	0.0119	W46
N2543ZD300	3000	2543	32000	5.12 × 10 ⁶	0.780	0.274	125	0.0110	0.0119	W46
N2593MK160	1600	2593	34500	5.95 × 10 ⁶	0.940	0.154	125	0.0140	0.0157	WP3
N2593MK180	1800	2593	34500	5.95 × 10 ⁶	0.940	0.154	125	0.0140	0.0157	WP3
N2600MC160	1600	2600	30000	4.50 × 10 ⁶	0.950	0.130	125	0.0150	0.0165	W70
N2600MC180	1800	2600	30000	4.50 × 10 ⁶	0.950	0.130	125	0.0150	0.0165	W70
N2825TE420	4200	2825	36900	6.81 × 10 ⁶	1.210	0.270	125	0.0080	0.0085	W82
N2825TE450	4500	2825	36900	6.81 × 10 ⁶	1.210	0.270	125	0.0080	0.0085	W82
N2825TJ420	4200	2825	36900	6.81 × 10 ⁶	1.210	0.270	125	0.0080	0.0085	W81
N2825TJ450	4500	2825	36900	6.81 × 10 ⁶	1.210	0.270	125	0.0080	0.0085	W81
N2830HE260	2600	2830	36000	6.48 × 10 ⁶	0.930	0.150	125	0.0125	0.0138	W80
N2830HE280	2800	2830	36000	6.48 × 10 ⁶	0.930	0.150	125	0.0125	0.0138	W80
N2900QL020	200	2900	28000	3.92 × 10 ⁶	0.850	0.080	150	0.0230	0.0272	WP6
N2900QL040	400	2900	28000	3.92 × 10 ⁶	0.850	0.080	150	0.0230	0.0272	WP6
N2900QL060	600	2900	28000	3.92 × 10 ⁶	0.850	0.080	150	0.0230	0.0272	WP6
N3012ZC200	2000	3012	45100	10.2 × 10 ⁶	0.920	0.160	125	0.0110	0.0119	W13
N3012ZC260	2600	3012	45100	10.2 × 10 ⁶	0.920	0.160	125	0.0110	0.0119	W13
N3012ZD200	2000	3012	45100	10.2 × 10 ⁶	0.920	0.160	125	0.0110	0.0119	W46
N3012ZD260	2600	3012	45100	10.2 × 10 ⁶	0.920	0.160	125	0.0110	0.0119	W46
N3022MK080	800	3022	38200	7.30 × 10 ⁶	0.981	0.090	125	0.0140	0.0157	WP3
N3022MK120	1200	3022	38200	7.30 × 10 ⁶	0.981	0.090	125	0.0140	0.0157	WP3
N3022MK140	1400	3022	38200	7.30 × 10 ⁶	0.981	0.090	125	0.0140	0.0157	WP3
N3029ZC240	2400	3029	38200	7.30 × 10 ⁶	0.947	0.154	125	0.0110	0.0119	W13
N3029ZC280	2800	3029	38200	7.30 × 10 ⁶	0.947	0.154	125	0.0110	0.0119	W13
N3029ZD240	2400	3029	38200	7.30 × 10 ⁶	0.947	0.154	125	0.0110	0.0119	W46
N3029ZD280	2800	3029	38200	7.30 × 10 ⁶	0.947	0.154	125	0.0110	0.0119	W46
N3165HA260	2600	3165	36000	6.48 × 10 ⁶	0.930	0.150	125	0.0105	0.0118	W79
N3165HA280	2800	3165	36000	6.48 × 10 ⁶	0.930	0.150	125	0.0105	0.0118	W79
N3175HE160	1600	3175	45500	10.40 × 10 ⁶	0.900	0.110	125	0.0125	0.0138	W80
N3175HE180	1800	3175	45500	10.40 × 10 ⁶	0.900	0.110	125	0.0125	0.0138	W80
N3229QK020	200	3229	28000	3.92 × 10 ⁶	0.926	0.067	140	0.0180	0.0217	WP2
N3229QK040	400	3229	28000	3.92 × 10 ⁶	0.926	0.067	140	0.0180	0.0217	WP2
N3229QK060	600	3229	28000	3.92 × 10 ⁶	0.926	0.067	140	0.0180	0.0217	WP2
N3533ZC140	1400	3533	50000	12.5 × 10 ⁶	0.970	0.095	125	0.0110	0.0120	W13
N3533ZC180	1800	3533	50000	12.5 × 10 ⁶	0.970	0.095	125	0.0110	0.0120	W13
N3533ZC220	2200	3533	50000	12.5 × 10 ⁶	0.970	0.095	125	0.0110	0.0120	W13
N3533ZD140	1400	3533	50000	12.5 × 10 ⁶	0.970	0.095	125	0.0110	0.0120	W46
N3533ZD180	1800	3533	50000	12.5 × 10 ⁶	0.970	0.095	125	0.0110	0.0120	W46
N3533ZD220	2200	3533	50000	12.5 × 10 ⁶	0.970	0.095	125	0.0110	0.0120	W46
N3565HA160	1600	3565	45500	10.4 × 10 ⁶	0.900	0.110	125	0.0105	0.0118	W79
N3565HA180	1800	3565	45500	10.4 × 10 ⁶	0.900	0.110	125	0.0105	0.0118	W79
N3597ML020	200	3597	45400	10.3 × 10 ⁶	0.840	0.053	140	0.0180	0.0201	WP5
N3597ML040	400	3597	45400	10.3 × 10 ⁶	0.840	0.053	140	0.0180	0.0201	WP5
N3597ML060	600	3597	45400	10.3 × 10 ⁶	0.840	0.053	140	0.0180	0.0201	WP5
N3620TE320	3200	3620	52500	11.2 × 10 ⁶	0.911	0.168	125	0.0080	0.0085	W82
N3620TE360	3600	3620	52500	11.2 × 10 ⁶	0.911	0.168	125	0.0080	0.0085	W82
N3620TJ320	3200	3620	52500	11.2 × 10 ⁶	0.911	0.168	125	0.0080	0.0085	W81
N3620TJ360	3600	3620	52500	11.2 × 10 ⁶	0.911	0.168	125	0.0080	0.0085	W81
N3790TE240	2400	3790	49500	12.3 × 10 ⁶	0.900	0.150	125	0.0080	0.0085	W82
N3790TE280	2800	3790	49500	12.3 × 10 ⁶	0.900	0.150	125	0.0080	0.0085	W82


High-Power Devices



W13
Weight 1.7 kg




W82
Weight 1.65 kg



W118
Weight 2.2 kg



WP3
Weight 260 g



W46
Weight 1.2 kg




W107
Weight 1.6 kg



W119
Weight 2.9 kg



WP4
Weight 550 g



W81
Weight 1.2 kg



W108
Weight 2.1 kg



Phase Control Thyristors—Capsule Types

Part Number	V _{DRM} V _{RRM}	I _{TAV}	I _{TSM}	I ² t	V _{TO}	r _T	T _{JM}	R _{thJC}		Fig. No.
		T _k = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}		@ T _{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A²S	V	mΩ	°C	K/W	K/W	
N3790TJ240	2400	3790	49500	12.3 × 10 ⁶	0.900	0.150	125	0.0080	0.0085	W81
N3790TJ280	2800	3790	49500	12.3 × 10 ⁶	0.900	0.150	125	0.0080	0.0085	W81
N3880ZD160	1600	3880	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0110	0.0119	W46
N3880ZD180	1800	3880	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0110	0.0119	W46
N3904HK200	2000	3904	50900	12.95 × 10 ⁶	0.920	0.111	125	0.0090	0.0099	WP4
N3904HK220	2200	3904	50900	12.95 × 10 ⁶	0.920	0.111	125	0.0090	0.0099	WP4
N3930ZC120	1200	3930	54000	14.6 × 10 ⁶	0.841	0.080	125	0.0110	0.0119	W13
N3930ZC160	1600	3930	54000	14.6 × 10 ⁶	0.841	0.080	125	0.0110	0.0119	W13
N3930ZD120	1200	3930	54000	14.6 × 10 ⁶	0.841	0.080	125	0.0110	0.0119	W46
N3930ZD160	1600	3930	54000	14.6 × 10 ⁶	0.841	0.080	125	0.0110	0.0119	W46
N4085ZC080	800	4085	64000	20.5 × 10 ⁶	0.850	0.070	125	0.0110	0.0119	W13
N4085ZC120	1200	4085	64000	20.5 × 10 ⁶	0.850	0.070	125	0.0110	0.0119	W13
N4085ZD080	800	4085	64000	20.5 × 10 ⁶	0.850	0.070	125	0.0110	0.0119	W46
N4085ZD120	1200	4085	64000	20.5 × 10 ⁶	0.850	0.070	125	0.0110	0.0119	W46
N4165EE420	4200	4165	56000	15.7 × 10 ⁶	0.977	0.177	125	0.0060	0.0064	W108
N4165EE450	4500	4165	56000	15.7 × 10 ⁶	0.977	0.177	125	0.0060	0.0064	W108
N4316MK020	200	4316	45400	10.3 × 10 ⁶	0.840	0.053	140	0.0140	0.0157	WP3
N4316MK040	400	4316	45400	10.3 × 10 ⁶	0.840	0.053	140	0.0140	0.0157	WP3
N4316MK060	600	4316	45400	10.3 × 10 ⁶	0.840	0.053	140	0.0140	0.0157	WP3
N4340TE180	1800	4340	55000	15.1 × 10 ⁶	0.886	0.105	125	0.0080	0.0085	W82
N4340TE220	2200	4340	55000	15.1 × 10 ⁶	0.886	0.105	125	0.0080	0.0085	W82
N4340TJ180	1800	4340	55000	15.1 × 10 ⁶	0.886	0.105	125	0.0080	0.0085	W81
N4340TJ220	2200	4340	55000	15.1 × 10 ⁶	0.886	0.105	125	0.0080	0.0085	W81
N4472HK160	1600	4472	59000	17.40 × 10 ⁶	0.986	0.068	125	0.0090	0.0099	WP4
N4472HK180	1800	4472	59000	17.40 × 10 ⁶	0.986	0.068	125	0.0090	0.0099	WP4
N4650EA420	4200	4650	56000	15.7 × 10 ⁶	0.977	0.177	125	0.0050	0.0054	W107
N4650EA450	4500	4650	56000	15.7 × 10 ⁶	0.977	0.177	125	0.0050	0.0054	W107
N4845EE320	3200	4845	65000	21.1 × 10 ⁶	0.913	0.125	125	0.0060	0.0065	W108
N4845EE360	3600	4845	65000	21.1 × 10 ⁶	0.913	0.125	125	0.0060	0.0065	W108
N4940HK120	1200	4940	62000	19.0 × 10 ⁶	0.939	0.520	125	0.0090	0.0099	WP4
N4940HK140	1400	4940	62000	19.0 × 10 ⁶	0.939	0.520	125	0.0090	0.0099	WP4
N5320FE420	4200	5320	78000	30.42 × 10 ⁶	1.060	0.130	125	0.0048	0.0051	W119
N5320FE450	4500	5320	78000	30.42 × 10 ⁶	1.060	0.130	125	0.0048	0.0051	W119

Phase Control Thyristors—Capsule Types

Part Number	V_{DRM} V_{RRM}	I_{TAV}	I_{TSM}	I^2t	V_{T0}	r_T	T_{JM}	R_{thJC}		Fig. No.
		$T_k = 55^\circ C$	10 ms $\frac{1}{2}$ sine $V_R \leq 60\% V_{RRM}$		@ T_{JM}			d.c. 180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ	°C	K/W	K/W	
N5715EE240	2400	5715	80000	32.0×10^6	0.840	0.085	125	0.0060	0.0065	W108
N5715EE280	2800	5715	80000	32.0×10^6	0.840	0.085	125	0.0060	0.0065	W108
N5910FA420	4200	5910	78000	30.42×10^6	1.060	0.130	125	0.0040	0.0044	W118
N5910FA450	4500	5910	78000	30.42×10^6	1.060	0.130	125	0.0040	0.0044	W118
N6012ZD020	200	6012	65000	21.13×10^6	0.853	0.029	140	0.0110	0.0119	W46
N6012ZD040	400	6012	65000	21.13×10^6	0.853	0.029	140	0.0110	0.0119	W46
N6012ZD060	600	6012	65000	21.13×10^6	0.853	0.029	140	0.0110	0.0119	W46
N6405EA240	2400	6405	80000	32.0×10^6	0.840	0.085	125	0.0050	0.0054	W107
N6405EA280	2800	6405	80000	32.0×10^6	0.840	0.085	125	0.0050	0.0054	W107
N6974HK020	200	6974	65000	21.13×10^6	0.853	0.029	140	0.0090	0.0099	WP4
N6974HK040	400	6974	65000	21.13×10^6	0.853	0.029	140	0.0090	0.0099	WP4
N6974HK060	600	6974	65000	21.13×10^6	0.853	0.029	140	0.0090	0.0099	WP4
N7585FE240	2400	7535	110000	60.50×10^6	0.780	0.062	125	0.0048	0.0051	W119
N7585FE280	2800	7535	110000	60.50×10^6	0.780	0.062	125	0.0048	0.0051	W119
N7905FE180	1800	7905	117000	68.44×10^6	0.770	0.056	125	0.0048	0.0051	W119
N7905FE220	2200	7905	117000	68.44×10^6	0.770	0.056	125	0.0048	0.0051	W119
N8440FA240	2400	8440	110000	60.50×10^6	0.780	0.062	125	0.0040	0.0044	W118
N8440FA280	2800	8440	110000	60.50×10^6	0.780	0.062	125	0.0040	0.0044	W118
N8800FA180	1800	8800	117000	68.44×10^6	0.770	0.056	125	0.0040	0.0044	W118
N8800FA220	2200	8800	117000	68.44×10^6	0.770	0.056	125	0.0040	0.0044	W118

High-Power Devices



W8
Weight 70 g



W12
Weight 1 kg



W58
Weight 90 g




WP4
Weight 550 g



W10
Weight 340 g




W13
Weight 1.7 kg



W79
Weight 890 g



W11
Weight 510 g




W46
Weight 1.2 kg



WP1
Weight 180 g

Phase Control Thyristors—Capsule Types, B-Series



Littelfuse introduces the new family of phase control thyristors for industrial applications. Devices are available with voltage ranges from 400V to 2500V, making them suitable for systems operating with line voltages from 230V to over 600V.

Part Number	V_{DRM} V_{RRM}	I_{TAV}	I_{TSM}	I^2t	V_{T0}	r_T	T_{JM}	R_{thJC}		Fig. No.
		$T_k = 55\text{ }^{\circ}\text{C}$	10 ms ½ sine $V_R \leq 60\% V_{RRM}$		@ T_{JM}			180° sine	120° Rect.	
	V	A	A	A²S	V	mΩ	°C	K/W	K/W	
B0470WC120	1200	470	4650	108 × 10³	0.92	0.99	125	0.0722	0.0891	W8
B0470WC160	1600	470	4650	108 × 10³	0.92	0.99	125	0.0722	0.0891	W8
B0713YC200	2000	713	7100	252 × 10³	1.103	0.804	125	0.039	0.046	W58
B0713YC220	2200	713	7100	252 × 10³	1.103	0.804	125	0.039	0.046	W58
B0713YC240	2400	713	7100	252 × 10³	1.103	0.804	125	0.039	0.046	W58
B0713YC250	2500	713	7100	252 × 10³	1.103	0.804	125	0.039	0.046	W58
B0800YC120	1200	800	7500	281 × 10³	1.08	0.596	125	0.0389	0.046	W58
B0800YC140	1400	800	7500	281 × 10³	1.08	0.596	125	0.0389	0.046	W58
B0800YC160	1600	800	7500	281 × 10³	1.08	0.596	125	0.0389	0.046	W58
B0800YC180	1800	800	7500	281 × 10³	1.08	0.596	125	0.0389	0.046	W58
B0870YC120	1200	870	8400	353 × 10³	1.03	0.48	125	0.0389	0.0461	W58
B0870YC140	1400	870	8400	353 × 10³	1.03	0.48	125	0.0389	0.0461	W58
B0870YC160	1600	870	8400	353 × 10³	1.03	0.48	125	0.0389	0.0461	W58
B0915LC240	2400	915	9200	423×103	1.04	0.606	125	0.032	0.0388	W10
B0915LC280	2800	915	9200	423×103	1.04	0.606	125	0.032	0.0388	W10
B1050LC180	1800	1050	13200	870 × 10³	1	0.416	125	0.032	0.0388	W10
B1050LC220	2200	1050	13200	870 × 10³	1	0.416	125	0.032	0.0388	W10
B1115LC160	1600	1157	12700	806 × 10³	0.973	0.369	125	0.032	0.0388	W10
B1115LC180	1800	1157	12700	806 × 10³	0.973	0.369	125	0.032	0.0388	W10
B1175JK200	2000	1175	13200	806 × 10³	1	0.416	125	0.0278	0.0314	WP1
B1175JK220	2200	1175	13200	806 × 10³	1	0.416	125	0.0278	0.0314	WP1
B1230LC120	1200	1226	15000	1.125 × 10⁶	0.883	0.297	125	0.032	0.0388	W10
B1230LC140	1400	1226	15000	1.125 × 10⁶	0.883	0.297	125	0.032	0.0388	W10
B1230LC160	1600	1226	15000	1.125 × 10⁶	0.883	0.297	125	0.032	0.0388	W10
B1265JK160	1600	1263	15000	1.13 × 10⁶	1.015	0.332	125	0.0278	0.0314	WP1
B1265JK180	1800	1263	15000	1.13 × 10⁶	1.015	0.332	125	0.0278	0.0314	WP1
B1370JK120	1200	1366	15900	1.26 × 10⁶	0.985	0.27	125	0.0278	0.0314	WP1
B1370JK140	1400	1366	15900	1.26 × 10⁶	0.985	0.27	125	0.0278	0.0314	WP1
B1370JK160	1600	1366	15900	1.26 × 10⁶	0.985	0.27	125	0.0278	0.0314	WP1
B1450QL180	1800	1450	17300	1.50×106	1.06	0.317	125	0.023	0.0272	WP6
B1450QL220	2200	1450	17300	1.50×106	1.06	0.317	125	0.023	0.0272	WP6
B1545NC160	1600	1545	23300	2.71 × 10⁶	0.92	0.252	125	0.0248	0.0271	W11
B1545NC180	1800	1545	23300	2.71 × 10⁶	0.92	0.252	125	0.0248	0.0271	W11
B1545NC200	2000	1545	23300	2.71 × 10⁶	0.92	0.252	125	0.0248	0.0271	W11
B1650QK180	1800	1650	17300	1.50×106	1.06	0.317	125	0.018	0.0202	WP2
B1650QK220	2200	1650	17300	1.50×106	1.06	0.317	125	0.018	0.0202	WP2

Part Number	V _{DRM} V _{RRM}	I _{TAV}	I _{TSM}	I ² t	V _{T0}	r _T	T _{JM}	R _{thJC}		Fig. No.
		T _k = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}		@T _{JM}			180° sine	120° Rect.	
	V	A	A	A ² S	V	mΩ	°C	K/W	K/W	
B1725NC120	1200	1725	27200	3.70 × 10 ⁶	0.972	0.169	125	0.0248	0.0271	W11
B1725NC140	1400	1725	27200	3.70 × 10 ⁶	0.972	0.169	125	0.0248	0.0271	W11
B1725NC160	1600	1725	27200	3.70 × 10 ⁶	0.972	0.169	125	0.0248	0.0271	W11
B1725NC180	1800	1725	27200	3.70 × 10 ⁶	0.972	0.169	125	0.0248	0.0271	W11
B1815NC120	1200	1815	29600	4.38 × 10 ⁶	0.847	0.17	125	0.0248	0.0271	W11
B1815NC140	1400	1815	29600	4.38 × 10 ⁶	0.847	0.17	125	0.0248	0.0271	W11
B1815NC160	1600	1815	29600	4.38 × 10 ⁶	0.847	0.17	125	0.0248	0.0271	W11
B2200ML180	1800	2191	34500	5.95×10 ⁶	0.94	0.3194	125	0.018	0.0193	WP5
B2295VC180	1800	2295	33800	5.7 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W12
B2295VC200	2000	2295	33800	5.7 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W12
B2295VC220	2200	2295	33800	5.7 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W12
B2295VF180	1800	2295	33800	5.7 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W62
B2295VF200	2000	2295	33800	5.7 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W62
B2295VF220	2200	2295	33800	5.7 × 10 ⁶	0.956	0.148	125	0.017	0.0206	W62
B2505VC140	1400	2505	37000	6.85 × 10 ⁶	0.88	0.124	125	0.0169	0.0207	W12
B2505VC160	1600	2505	37000	6.85 × 10 ⁶	0.88	0.124	125	0.0169	0.0207	W12
B2505VF140	1400	2505	37000	6.85 × 10 ⁶	0.88	0.124	125	0.0169	0.0207	W62
B2505VF160	1600	2505	37000	6.85 × 10 ⁶	0.88	0.124	125	0.0169	0.0207	W62
B3420ZC180	1800	3420	50000	12.5 × 10 ⁶	0.93	0.11	125	0.0112	0.0119	W13
B3420ZC200	2000	3420	50000	12.5 × 10 ⁶	0.93	0.11	125	0.0112	0.0119	W13
B3420ZC220	2200	3420	50000	12.5 × 10 ⁶	0.93	0.11	125	0.0112	0.0119	W13
B3420ZD180	1800	3420	50000	12.5 × 10 ⁶	0.93	0.11	125	0.0112	0.0119	W46
B3420ZD200	2000	3420	50000	12.5 × 10 ⁶	0.93	0.11	125	0.0112	0.0119	W46
B2525ML120	1200	2525	38200	7.3×10 ⁶	0.98	0.09	125	0.018	0.0193	WP5
B2525ML140	1400	2525	38200	7.3×10 ⁶	0.98	0.09	125	0.018	0.0193	WP5
B2615MC160	1600	2615	34300	5.88×10 ⁶	0.95	0.313	125	0.015	0.0161	W70
B2615MC180	1800	2615	34300	5.88×10 ⁶	0.95	0.313	125	0.015	0.0161	W70
B2905QL040	400	2905	28000	3.92×10 ⁶	0.85	0.08	150	0.023	0.0255	WP6
B2905QL060	600	2905	28000	3.92×10 ⁶	0.85	0.08	150	0.023	0.0255	WP6
B3025MK120	1200	3025	38200	7.30×10 ⁶	0.981	0.09	125	0.014	0.015	WP3
B3025MK140	1400	3025	38200	7.30×10 ⁶	0.981	0.09	125	0.014	0.015	WP3
B3230QK040	400	3230	28000	3.92×10 ⁶	0.926	0.067	140	0.018	0.0202	WP2
B3230QK060	600	3230	28000	3.92×10 ⁶	0.926	0.067	140	0.018	0.0202	WP2
B3420ZD220	2200	3420	50000	12.5 × 10 ⁶	0.93	0.11	125	0.0112	0.0119	W46
B3570HA160	1600	3570	45500	10.4 × 10 ⁶	0.9	0.11	125	0.0108	0.0118	W79
B3570HA180	1800	3570	45500	10.4 × 10 ⁶	0.9	0.11	125	0.0108	0.0118	W79
B3885ZC160	1600	3885	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0112	0.0119	W13
B3885ZC180	1800	3885	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0112	0.0119	W13
B3885ZD160	1600	3885	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0112	0.0119	W46
B3885ZD180	1800	3885	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0112	0.0119	W46
B3910HK180	1800	3910	50900	12.95 × 10 ⁶	0.92	0.111	125	0.0091	0.0099	WP4
B3910HK200	2000	3910	50900	12.95 × 10 ⁶	0.92	0.111	125	0.0091	0.0099	WP4
B3910HK220	2200	3910	50900	12.95 × 10 ⁶	0.92	0.111	125	0.0091	0.0099	WP4
B3935ZC120	1200	3935	54000	14.6 × 10 ⁶	0.841	0.08	125	0.0112	0.0119	W13
B3935ZC140	1400	3935	54000	14.6 × 10 ⁶	0.841	0.08	125	0.0112	0.0119	W13
B3935ZC160	1600	3935	54000	14.6 × 10 ⁶	0.841	0.08	125	0.0112	0.0119	W13
B3935ZD120	1200	3935	54000	14.6 × 10 ⁶	0.841	0.08	125	0.0112	0.0119	W46
B3935ZD140	1400	3935	54000	14.6 × 10 ⁶	0.841	0.08	125	0.0112	0.0119	W46
B3935ZD160	1600	3935	54000	14.6 × 10 ⁶	0.841	0.08	125	0.0112	0.0119	W46
B4350TJ180	1800	4350	55000	15.1×10 ⁶	0.886	0.105	125	0.008	0.0085	W81
B4350TJ220	2200	4350	55000	15.1×10 ⁶	0.886	0.105	125	0.008	0.0085	W81
B4475HK160	1600	4475	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0091	0.0099	WP4
B4475HK180	1800	4475	59000	17.4 × 10 ⁶	0.986	0.068	125	0.0091	0.0099	WP4
B4945HK120	1200	4945	62000	19 × 10 ⁶	0.939	0.052	125	0.0091	0.0099	WP4
B4945HK140	1400	4945	62000	19 × 10 ⁶	0.939	0.052	125	0.0091	0.0099	WP4
B6975HK040	400	6975	65000	21.13 × 10 ⁶	0.853	0.029	125	0.0091	0.0099	WP4
B6975HK060	600	6975	65000	21.13 × 10 ⁶	0.853	0.029	125	0.0091	0.0099	WP4

High-Power Devices


Medium Voltage Thyristors

Medium voltage applications place additional demands on phase-controlled thyristors. To address these requirements, a comprehensive range of thyristors has been developed that are optimized for medium voltage applications and series connection. As operating voltages increase, switching losses and turn-off times become more significant in line-frequency applications. Our patented distributed gate architecture ensures consistent switching performance over a wide range of voltage, current, and di/dt. Medium Voltage Thyristors are engineered to achieve an optimum balance between conduction losses, commutation losses, and turn-off time to give maximum power handling from line frequency to 400 Hz. Their design also supports operation in series and parallel configurations. Medium Voltage Thyristors are available from 2.8 kV to 6.5 kV with current ratings from 400 A to 2000 A with silicon diameters from 38 mm to 96 mm. These devices are well suited for applications such as high-power converters such as medium voltage DC drives, medium voltage soft starts, and utility applications such as HVDC, static VAR compensators, excitation, and transfer switches.


To ensure long-term reliability in critical, high-investment applications, these devices are subjected to extensive routine and type testing, providing dependable performance over extended service lifetimes.



W10
Weight 340 g




W62
Weight 1 kg



W82
Weight 1.65 kg



W11
Weight 510 g




W79
Weight 890 g



W107
Weight 1.6 kg




W13
Weight 1.7 kg




W80
Weight 1.2 kg



W46
Weight 1.2 kg



W81
Weight 1.2 kg



Medium Voltage Thyristors—Capsule Types

Part Number	V_{DRM} V_{RRM}	I_{TAV}	I_{TSM}	I^2t	t_q @ 200 V/ μ s	Typ. Reverse Recovery Charge			V_{TO}	r_T	T_{JM}	R_{thJK}		Fig. No.
		$T_K = 55^\circ C$	10 ms $\frac{1}{2}$ sine $V_R - \leq 60\% V_{RRM}$			T_{JM}			@ T_{JM}			180° sine	120° Rect.	
						Q_{rr}	@ I_{TM}	@ -di/dt						
	V	A	A	A $\cdot$ S	μ s	μ C	A	A/ μ s	V	m Ω	°C	K/W	K/W	
K0443LC600	6000	443	4800	115×10^3	1100	3100	1000	10	1.57	2.43	125	0.032	0.039	W10
K0443LC650	6500	443	4800	115×10^3	1100	3100	1000	10	1.57	2.43	125	0.032	0.039	W10
K0769NC600	6000	769	8600	370×10^3	1200	3100	1000	10	1.57	1.77	125	0.025	0.027	W11
K0769NC650	6500	769	8600	370×10^3	1200	3100	1000	10	1.57	1.77	125	0.025	0.027	W11
K0890NC360	3600	890	10900	594×10^3	350 - 550	4000	1000	10	1.516	0.800	125	0.0240	0.0270	W11
K0890NC420	4200	890	10900	594×10^3	350 - 550	4000	1000	10	1.516	0.800	125	0.0240	0.0270	W11
K1121NC320	3200	1121	15000	1.13×10^6	200 - 300	2000	1000	10	1.098	0.542	125	0.0240	0.0270	W11
K1121NC360	3600	1121	15000	1.13×10^6	200 - 300	2000	1000	10	1.098	0.542	125	0.0240	0.0270	W11
K1197NC280	2800	1197	10650	567×10^3	200 - 300	2700	1000	10	1.335	0.372	125	0.0240	0.0270	W11
K1197NC320	3200	1197	10650	567×10^3	200 - 300	2700	1000	10	1.335	0.372	125	0.0240	0.0270	W11
K1351VF600	6000	1351	14300	1.02×10^6	1000	7200	2000	10	1.41	0.6	125	0.013	0.0145	W62
K1351VF620	6200	1351	14300	1.02×10^6	1000	7200	2000	10	1.41	0.6	125	0.013	0.0145	W62
K1351VF640	6400	1351	14300	1.02×10^6	1000	7200	2000	10	1.41	0.6	125	0.013	0.0145	W62
K1351VF650	6500	1351	14300	1.02×10^6	1000	7200	2000	10	1.41	0.6	125	0.013	0.0145	W62
K1947ZC400	4000	1947	25000	3.13×10^6	600 - 700	8800	1000	10	1.221	0.425	125	0.0110	0.0119	W13

Medium Voltage Thyristors—Capsule Types



Part Number	V_{DRM} V_{RRM}	I_{TAV}	I_{TSM}	I^2t	t_q @ 200 V/ μ s	Typ. Reverse Recovery Charge			V_{TO}	r_T	T_{JM}	R_{thJK}		Fig. No.
		$T_K = 55^\circ C$	10 ms $\frac{1}{2}$ sine $V_R - \leq 60\% V_{RRM}$			T_{JM}			@ T_{JM}			180° sine	120° Rect.	
	V	A	A	A ² S	μ s	Q_{rr}	@ I_{TM}	@ -di/dt			V	m Ω	°C	
						μ C	A	A/ μ s						
K1947ZC450	4500	1947	25000	3.13×10^6	600-700	8800	1000	10	1.221	0.425	125	0.0110	0.0119	W13
K1947ZD400	4000	1947	25000	3.13×10^6	600-700	8800	1000	10	1.221	0.425	125	0.0110	0.0119	W46
K1947ZD450	4500	1947	25000	3.13×10^6	600-700	8800	1000	10	1.221	0.425	125	0.0110	0.0119	W46
K2095ZC360	3600	2095	18200	1.66×10^6	400-500	4550	2000	10	1.502	0.296	125	0.0110	0.0119	W13
K2095ZC420	4200	2095	18200	1.66×10^6	400-500	4550	2000	10	1.502	0.296	125	0.0110	0.0119	W13
K2095ZD360	3600	2095	18200	1.66×10^6	400-500	4550	2000	10	1.502	0.296	125	0.0110	0.0119	W46
K2095ZD420	4200	2095	18200	1.66×10^6	400-500	4550	2000	10	1.502	0.296	125	0.0110	0.0119	W46

High-Power Devices

Distributed Gate Thyristors

Littelfuse is recognized as the world leader in distributed gate technology. These devices are available with blocking voltages of up to 4.5 kV and average currents in excess of 5 kA, with t_q ratings as low as 10 μ s. This unique distributed gate design and these lifetime control features provides both high di/dt capability and fast, low-recovery turn-off while maintaining a low on-state voltage drop. They are ideally suited to applications such as: induction power supplies, high frequency inverters/converters, UPS, and pulse power.



W10
Weight 340 g



W11
Weight 510 g



W58
Weight 90 g

Distributed Gate Thyristors—Capsule Types



Part Number	V _{DRM}	V _{RRM}	I _{TAV}	I _{TSM}	I ² t	t _q @ 200 V/μs	Typ. Reverse Recovery Charge @ T _{JM}			V _{TO}	r _T	R _{thJK} 180° sine	Fig. No.
			T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}			Q _{rr}	@ I _{TM}	@ -di/dt	@ T _{JM}			
	V	V	A	A	A ² S	μs	μC	A	A/μs	V	mΩ	K/W	
R0472YC12E	1200	1200	472	4300	92.5 × 10 ³	25	155	550	40	1.648	1.125	0.0500	W58
R0472YC12F	1200	1200	472	4300	92.5 × 10 ³	30	155	550	40	1.648	1.125	0.0500	W58
R0472YC16E	1600	1600	472	4300	92.5 × 10 ³	25	155	550	40	1.648	1.125	0.0500	W58
R0472YC16F	1600	1600	472	4300	92.5 × 10 ³	30	155	550	40	1.648	1.125	0.0500	W58
R0487YC12D	1200	1200	487	4300	92.5 × 10 ³	20	90	550	40	1.738	0.943	0.0500	W58
R0487YC12E	1200	1200	487	4300	92.5 × 10 ³	25	90	550	40	1.738	0.943	0.0500	W58
R0487YC14D	1400	1400	487	4300	92.5 × 10 ³	20	90	550	40	1.738	0.943	0.0500	W58
R0487YC14E	1400	1400	487	4300	92.5 × 10 ³	25	90	550	40	1.738	0.943	0.0500	W58
R0577YC12C	1200	1200	577	6000	180 × 10 ³	15	150	550	40	1.510	0.640	0.0500	W58
R0577YC12D	1200	1200	577	6000	180 × 10 ³	20	150	550	40	1.510	0.640	0.0500	W58
R0577YC12E	1200	1200	577	6000	180 × 10 ³	25	150	550	40	1.510	0.640	0.0500	W58
R0633YC12D	1200	1200	633	6300	200 × 10 ³	20	125	550	40	1.250	0.614	0.0500	W58
R0633YC12E	1200	1200	633	6300	200 × 10 ³	25	125	550	40	1.250	0.614	0.0500	W58
R0633YC12F	1200	1200	633	6300	200 × 10 ³	30	125	550	40	1.250	0.614	0.0500	W58
R0717LC14G	1400	1400	717	7050	248.5 × 10 ³	35	425	1000	60	1.752	0.732	0.0320	W10
R0717LC14H	1400	1400	717	7050	248.5 × 10 ³	40	425	1000	60	1.752	0.732	0.0320	W10
R0717LC16G	1600	1600	717	7050	248.5 × 10 ³	35	425	1000	60	1.752	0.732	0.0320	W10
R0717LC16H	1600	1600	717	7050	248.5 × 10 ³	40	425	1000	60	1.752	0.732	0.0320	W10
R0736LC20J	2000	2000	736	6800	231 × 10 ³	50	640	1000	60	1.842	0.619	0.0320	W10
R0736LC20K	2000	2000	736	6800	231 × 10 ³	60	640	1000	60	1.842	0.619	0.0320	W10
R0736LC22J	2200	2000	736	6800	231 × 10 ³	50	640	1000	60	1.842	0.619	0.0320	W10
R0736LC22K	2200	2000	736	6800	231 × 10 ³	60	640	1000	60	1.842	0.619	0.0320	W10
R0736LC25J	2500	2000	736	6800	231 × 10 ³	50	640	1000	60	1.842	0.619	0.0320	W10
R0736LC25K	2500	2000	736	6800	231 × 10 ³	60	640	1000	60	1.842	0.619	0.0320	W10
R0736LC25L	2500	2000	736	6800	231 × 10 ³	65	640	1000	60	1.842	0.619	0.0320	W10
R0736LC25M	2500	2000	736	6800	231 × 10 ³	70	640	1000	60	1.842	0.619	0.0320	W10
R0809LC10A	1000	1000	809	8000	320 × 10 ³	10	120	1000	60	2.100	0.300	0.0320	W10
R0809LC10B	1000	1000	809	8000	320 × 10 ³	12	120	1000	60	2.100	0.300	0.0320	W10
R0830LC12C	1200	1200	830	8500	361 × 10 ³	15	285	1000	60	1.900	0.357	0.0320	W10
R0830LC12D	1200	1200	830	8500	361 × 10 ³	20	285	1000	60	1.900	0.357	0.0320	W10
R0830LC12E	1200	1200	830	8500	361 × 10 ³	25	285	1000	60	1.900	0.357	0.0320	W10
R0830LC12F	1200	1200	830	8500	361 × 10 ³	30	285	1000	60	1.900	0.357	0.0320	W10
R0830LC14C	1400	1400	830	8500	361 × 10 ³	15	285	1000	60	1.900	0.357	0.0320	W10
R0830LC14D	1400	1400	830	8500	361 × 10 ³	20	285	1000	60	1.900	0.357	0.0320	W10
R0830LC14E	1400	1400	830	8500	361 × 10 ³	25	285	1000	60	1.900	0.357	0.0320	W10
R0830LC14F	1400	1400	830	8500	361 × 10 ³	30	285	1000	60	1.900	0.357	0.0320	W10
R0878LC18K	1800	1800	878	7500	281 × 10 ³	60	720	1000	60	1.447	0.480	0.0320	W10
R0878LC18L	1800	1800	878	7500	281 × 10 ³	65	720	1000	60	1.447	0.480	0.0320	W10
R0878LC18M	1800	1800	878	7500	281 × 10 ³	70	720	1000	60	1.447	0.480	0.0320	W10
R0878LC20K	2000	1800	878	7500	281 × 10 ³	60	720	1000	60	1.447	0.480	0.0320	W10
R0878LC20L	2000	1800	878	7500	281 × 10 ³	65	720	1000	60	1.447	0.480	0.0320	W10
R0878LC20M	2000	1800	878	7500	281 × 10 ³	70	720	1000	60	1.447	0.480	0.0320	W10
R0878LC21K	2100	1800	878	7500	281 × 10 ³	60	720	1000	60	1.447	0.480	0.0320	W10
R0878LC21L	2100	1800	878	7500	281 × 10 ³	65	720	1000	60	1.447	0.480	0.0320	W10
R0878LC21M	2100	1800	878	7500	281 × 10 ³	70	720	1000	60	1.447	0.480	0.0320	W10
R0929LC12A	1200	1200	929	9000	405 × 10 ³	10	150	1000	60	1.549	0.350	0.0320	W10
R0929LC12B	1200	1200	929	9000	405 × 10 ³	12	150	1000	60	1.549	0.350	0.0320	W10
R0929LC12C	1200	1200	929	9000	405 × 10 ³	15	150	1000	60	1.549	0.350	0.0320	W10

Distributed Gate Thyristors—Capsule Types




Part Number	V _{DRM}	V _{RRM}	I _{TAV}	I _{TSM}	I ² t	t _q @ 200 V/μs	Typ. Reverse Recovery Charge @ T _{JM}			V _{TO}	r _T	R _{thJK} 180° sine	Fig. No.
			T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}	Q _{rr}		@ I _{TM}	@ -di/dt	@ T _{JM}				
									A	A	A/μs		
	V	V	A	A	A ² S	μs	μC	A	A/μs	V	mΩ	K/W	
R0964LC10C	1000	1000	964	9400	442 × 10 ³	15	170	1000	60	1.530	0.309	0.0320	W10
R0964LC10D	1000	1000	964	9400	442 × 10 ³	20	170	1000	60	1.530	0.309	0.0320	W10
R0964LC10E	1000	1000	964	9400	442 × 10 ³	25	170	1000	60	1.530	0.309	0.0320	W10
R0964LC12C	1200	1200	964	9400	442 × 10 ³	15	170	1000	60	1.530	0.309	0.0320	W10
R0964LC12D	1200	1200	964	9400	442 × 10 ³	20	170	1000	60	1.530	0.309	0.0320	W10
R0964LC12E	1200	1200	964	9400	442 × 10 ³	25	170	1000	60	1.530	0.309	0.0320	W10
R0990LC08A	800	800	990	11000	605 × 10 ³	10	90	1000	60	1.350	0.350	0.0320	W10
R0990LC08B	800	800	990	11000	605 × 10 ³	12	90	1000	60	1.350	0.350	0.0320	W10
R0990LC08C	800	800	990	11000	605 × 10 ³	15	90	1000	60	1.350	0.350	0.0320	W10
R1045NC28L	2800	2800	1055	12500	781 × 10 ³	60	950	1000	60	1.640	0.430	0.0240	W11
R1045NC28M	2800	2800	1055	12500	781 × 10 ³	70	950	1000	60	1.640	0.430	0.0240	W11
R1045NC32L	3200	3200	1055	12500	781 × 10 ³	60	950	1000	60	1.640	0.430	0.0240	W11
R1045NC32M	3200	3200	1055	12500	781 × 10 ³	70	950	1000	60	1.640	0.430	0.0240	W11
R1124NC18J	1800	1800	1124	13500	0.91 × 10 ⁶	50	640	1000	60	1.540	0.379	0.0240	W11
R1124NC18K	1800	1800	1124	13500	0.91 × 10 ⁶	60	640	1000	60	1.540	0.379	0.0240	W11
R1124NC18L	1800	1800	1124	13500	0.91 × 10 ⁶	65	640	1000	60	1.540	0.379	0.0240	W11
R1124NC18M	1800	1800	1124	13500	0.91 × 10 ⁶	70	640	1000	60	1.540	0.379	0.0240	W11
R1124NC20J	2000	1800	1124	13500	0.91 × 10 ⁶	50	640	1000	60	1.540	0.379	0.0240	W11
R1124NC20K	2000	1800	1124	13500	0.91 × 10 ⁶	60	640	1000	60	1.540	0.379	0.0240	W11
R1124NC20L	2000	1800	1124	13500	0.91 × 10 ⁶	65	640	1000	60	1.540	0.379	0.0240	W11
R1124NC20M	2000	1800	1124	13500	0.91 × 10 ⁶	70	640	1000	60	1.540	0.379	0.0240	W11
R1124NC21J	2100	1800	1124	13500	0.91 × 10 ⁶	50	640	1000	60	1.540	0.379	0.0240	W11
R1124NC21K	2100	1800	1124	13500	0.91 × 10 ⁶	60	640	1000	60	1.540	0.379	0.0240	W11
R1124NC21L	2100	1800	1124	13500	0.91 × 10 ⁶	65	640	1000	60	1.540	0.379	0.0240	W11
R1124NC21M	2100	1800	1124	13500	0.91 × 10 ⁶	70	640	1000	60	1.540	0.379	0.0240	W11
R1127NC32P	3200	3200	1127	12800	819 × 10 ³	120	3500	1000	60	1.500	0.474	0.0220	W11
R1127NC32R	3200	3200	1127	12800	819 × 10 ³	140	3500	1000	60	1.500	0.474	0.0220	W11
R1127NC32S	3200	3200	1127	12800	819 × 10 ³	160	3500	1000	60	1.500	0.474	0.0220	W11
R1127NC32T	3200	3200	1127	12800	819 × 10 ³	200	3500	1000	60	1.500	0.474	0.0220	W11
R1127NC34R	3400	3400	1127	12800	819 × 10 ³	140	3500	1000	60	1.500	0.474	0.0220	W11
R1127NC34S	3400	3400	1127	12800	819 × 10 ³	160	3500	1000	60	1.500	0.474	0.0220	W11
R1127NC34T	3400	3400	1127	12800	819 × 10 ³	200	3500	1000	60	1.500	0.474	0.0220	W11
R1127NC36R	3600	3600	1127	12800	819 × 10 ³	140	3500	1000	60	1.500	0.474	0.0220	W11
R1127NC36S	3600	3600	1127	12800	819 × 10 ³	160	3500	1000	60	1.500	0.474	0.0220	W11
R1127NC36T	3600	3600	1127	12800	819 × 10 ³	200	3500	1000	60	1.500	0.474	0.0220	W11
R1158NC26N	2600	2600	1158	14500	1.05 × 10 ⁶	100	1600	1000	60	1.600	0.400	0.0220	W11
R1158NC26P	2600	2600	1158	14500	1.05 × 10 ⁶	120	1600	1000	60	1.600	0.400	0.0220	W11
R1158NC26T	2600	2600	1158	14500	1.05 × 10 ⁶	200	1600	1000	60	1.600	0.400	0.0220	W11
R1178NC14E	1400	1400	1178	17000	1.45 × 10 ⁶	25	320	1000	60	1.600	0.300	0.0240	W11
R1178NC14F	1400	1400	1178	17000	1.45 × 10 ⁶	30	320	1000	60	1.600	0.300	0.0240	W11
R1178NC14G	1400	1400	1178	17000	1.45 × 10 ⁶	35	320	1000	60	1.600	0.300	0.0240	W11
R1211NC12C	1200	1200	1211	17600	1.548 × 10 ⁶	15	230	1000	60	1.720	0.230	0.0240	W11
R1211NC12D	1200	1200	1211	17600	1.548 × 10 ⁶	20	230	1000	60	1.720	0.230	0.0240	W11
R1211NC12E	1200	1200	1211	17600	1.548 × 10 ⁶	25	230	1000	60	1.720	0.230	0.0240	W11
R1271NC12B	1200	1200	1271	18000	1.62 × 10 ⁶	12	200	1000	60	1.547	0.237	0.0240	W11
R1271NC12C	1200	1200	1271	18000	1.62 × 10 ⁶	15	200	1000	60	1.547	0.237	0.0240	W11
R1271NC12D	1200	1200	1271	18000	1.62 × 10 ⁶	20	200	1000	60	1.547	0.237	0.0240	W11
R1271NC12E	1200	1200	1271	18000	1.62 × 10 ⁶	25	200	1000	60	1.547	0.237	0.0240	W11
R1275NC18L	1800	1800	1275	15500	1.20 × 10 ⁶	65	940	1000	60	1.207	0.342	0.0240	W11
R1275NC18M	1800	1800	1275	15500	1.20 × 10 ⁶	70	940	1000	60	1.207	0.342	0.0240	W11
R1275NC20L	2000	1800	1275	15500	1.20 × 10 ⁶	65	940	1000	60	1.207	0.342	0.0240	W11
R1275NC20M	2000	1800	1275	15500	1.20 × 10 ⁶	70	940	1000	60	1.207	0.342	0.0240	W11
R1275NC21L	2100	1800	1275	15500	1.20 × 10 ⁶	65	940	1000	60	1.207	0.342	0.0240	W11
R1275NC21M	2100	1800	1275	15500	1.20 × 10 ⁶	70	940	1000	60	1.207	0.342	0.0240	W11
R1279NC22J	2200	2200	1279	14800	1.10 × 10 ⁶	50	1250	1000	60	1.440	0.330	0.0220	W11
R1279NC22K	2200	2200	1279	14800	1.10 × 10 ⁶	60	1250	1000	60	1.440	0.330	0.0220	W11
R1279NC22L	2200	2200	1279	14800	1.10 × 10 ⁶	65	1250	1000	60	1.440	0.330	0.0220	W11
R1279NC22M	2200	2200	1279	14800	1.10 × 10 ⁶	70	1250	1000	60	1.440	0.330	0.0220	W11
R1279NC25J	2500	2500	1279	14800	1.10 × 10 ⁶	50	1250	1000	60	1.440	0.330	0.0220	W11
R1279NC25K	2500	2500	1279	14800	1.10 × 10 ⁶	60	1250	1000	60	1.440	0.330	0.0220	W11
R1279NC25L	2500	2500	1279	14800	1.10 × 10 ⁶	65	1250	1000	60	1.440	0.330	0.0220	W11
R1279NC25M	2500	2500	1279	14800	1.10 × 10 ⁶	70	1250	1000	60	1.440	0.330	0.0220	W11
R1280NC21J	2100	2100	1280	14800	1.10 × 10 ⁶	50	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC21K	2100	2100	1280	14800	1.10 × 10 ⁶	60	1200	1000	60	1.440	0.330	0.0220	W11


High-Power Devices



W11
Weight 510 g



W46
Weight 1.2 kg




W79
Weight 890 g



W13
Weight 1.7 kg



W70
Weight 550 g



Distributed Gate Thyristors—Capsule Types

Part Number	V _{DRM}	V _{RRM}	I _{TAV}	I _{TSM}	I ² t	t _q @ 200 V/μs	Typ. Reverse Recovery Charge @ T _{JM}			V _{TO}	r _T	R _{thJK} 180° sine	Fig. No.
			T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}			Q _{rr}	@ I _{TM}	@ -di/dt	@ T _{JM}			
	V	V	A	A	A ² S	μs	μC	A	A/μs	V	mΩ	K/W	
R1280NC21L	2100	2100	1280	14800	1.10 × 10 ⁶	65	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC21M	2100	2100	1280	14800	1.10 × 10 ⁶	70	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC22J	2200	2100	1280	14800	1.10 × 10 ⁶	50	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC22K	2200	2100	1280	14800	1.10 × 10 ⁶	60	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC22L	2200	2100	1280	14800	1.10 × 10 ⁶	65	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC22M	2200	2100	1280	14800	1.10 × 10 ⁶	70	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC25J	2500	2100	1280	14800	1.10 × 10 ⁶	50	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC25K	2500	2100	1280	14800	1.10 × 10 ⁶	60	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC25L	2500	2100	1280	14800	1.10 × 10 ⁶	65	1200	1000	60	1.440	0.330	0.0220	W11
R1280NC25M	2500	2100	1280	14800	1.10 × 10 ⁶	70	1200	1000	60	1.440	0.330	0.0220	W11
R1331NC10B	1000	1000	1331	18200	1.66 × 10 ⁶	12	200	1000	60	1.450	0.285	0.0220	W11
R1331NC10C	1000	1000	1331	18200	1.66 × 10 ⁶	15	200	1000	60	1.450	0.285	0.0220	W11
R1331NC10D	1000	1000	1331	18200	1.66 × 10 ⁶	20	200	1000	60	1.450	0.285	0.0220	W11
R1331NC12B	1200	1200	1331	18200	1.66 × 10 ⁶	12	200	1000	60	1.450	0.285	0.0220	W11
R1331NC12C	1200	1200	1331	18200	1.66 × 10 ⁶	15	200	1000	60	1.450	0.285	0.0220	W11
R1331NC12D	1200	1200	1331	18200	1.66 × 10 ⁶	20	200	1000	60	1.450	0.285	0.0220	W11
R1446NC12C	1200	1200	1446	19500	1.90 × 10 ⁶	15	300	1000	60	1.304	0.199	0.0240	W11
R1446NC12D	1200	1200	1446	19500	1.90 × 10 ⁶	20	300	1000	60	1.304	0.199	0.0240	W11
R1446NC12E	1200	1200	1446	19500	1.90 × 10 ⁶	25	300	1000	60	1.304	0.199	0.0240	W11
R1446NC12F	1200	1200	1446	19500	1.90 × 10 ⁶	30	300	1000	60	1.304	0.199	0.0240	W11
R1448NC14H	1400	1400	1448	15500	1.20 × 10 ⁶	40	950	1000	60	1.300	0.250	0.0220	W11
R1448NC14J	1400	1400	1448	15500	1.20 × 10 ⁶	50	950	1000	60	1.300	0.250	0.0220	W11
R1448NC18H	1800	1800	1448	15500	1.20 × 10 ⁶	40	950	1000	60	1.300	0.250	0.0220	W11
R1448NC18J	1800	1800	1448	15500	1.20 × 10 ⁶	50	950	1000	60	1.300	0.250	0.0220	W11
R1448NC20H	2000	2000	1448	15500	1.20 × 10 ⁶	40	950	1000	60	1.300	0.250	0.0220	W11
R1448NC20J	2000	2000	1448	15500	1.20 × 10 ⁶	50	950	1000	60	1.300	0.250	0.0220	W11
R1448NC20K	2000	2000	1448	15500	1.20 × 10 ⁶	60	950	1000	60	1.300	0.250	0.0220	W11
R1448NC20L	2000	2000	1448	15500	1.20 × 10 ⁶	65	950	1000	60	1.300	0.250	0.0220	W11
R1448NC20M	2000	2000	1448	15500	1.20 × 10 ⁶	70	950	1000	60	1.300	0.250	0.0220	W11
R1605MC20E	2000	2000	1605	20700	2.14 × 10 ⁶	25	900	1000	60	2.100	0.200	0.0150	W70
R1605MC20F	2000	2000	1605	20700	2.14 × 10 ⁶	30	900	1000	60	2.100	0.200	0.0150	W70
R1605MC20G	2000	2000	1605	20700	2.14 × 10 ⁶	35	900	1000	60	2.100	0.200	0.0150	W70
R1605MC20H	2000	2000	1605	20700	2.14 × 10 ⁶	40	900	1000	60	2.100	0.200	0.0150	W70
R1605MC20J	2000	2000	1605	20700	2.14 × 10 ⁶	50	900	1000	60	2.100	0.200	0.0150	W70
R1605MC22E	2200	2200	1605	20700	2.14 × 10 ⁶	25	900	1000	60	2.100	0.200	0.0150	W70
R1605MC22F	2200	2200	1605	20700	2.14 × 10 ⁶	30	900	1000	60	2.100	0.200	0.0150	W70
R1605MC22G	2200	2200	1605	20700	2.14 × 10 ⁶	35	900	1000	60	2.100	0.200	0.0150	W70
R1605MC22H	2200	2200	1605	20700	2.14 × 10 ⁶	40	900	1000	60	2.100	0.200	0.0150	W70
R1605MC22J	2200	2200	1605	20700	2.14 × 10 ⁶	50	900	1000	60	2.100	0.200	0.0150	W70
R1700MC18E	1800	1800	1700	20000	2.0 × 10 ⁶	25	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC18F	1800	1800	1700	20000	2.0 × 10 ⁶	30	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC18G	1800	1800	1700	20000	2.0 × 10 ⁶	35	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC18H	1800	1800	1700	20000	2.0 × 10 ⁶	40	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC18J	1800	1800	1700	20000	2.0 × 10 ⁶	50	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC21E	2100	1800	1700	20000	2.0 × 10 ⁶	25	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC21F	2100	1800	1700	20000	2.0 × 10 ⁶	30	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC21G	2100	1800	1700	20000	2.0 × 10 ⁶	35	1400	1000	60	1.600	0.250	0.0150	W70

Distributed Gate Thyristors—Capsule Types



Part Number	V _{DRM}	V _{RRM}	I _{TAV}	I _{TSM}	I ² t	t _q @ 200 V/μs	Typ. Reverse Recovery Charge @ T _{JM}			V _{TO}	r _T	R _{thJK} 180° sine	Fig. No.
			T _K = 55 °C	10 ms ½ sine V _R - ≤60% V _{RRM}	A		Q _{rr}	@ I _{TM}	@ -di/dt	@ T _{JM}			
										V	V	A	
R1700MC21H	2100	1800	1700	20000	2.0 × 10 ⁶	40	1400	1000	60	1.600	0.250	0.0150	W70
R1700MC21J	2100	1800	1700	20000	2.0 × 10 ⁶	50	1400	1000	60	1.600	0.250	0.0150	W70
R1955MC14D	1400	1400	1955	26500	3.51 × 10 ⁶	20	1000	1000	60	1.460	0.910	0.0150	W70
R1955MC14E	1400	1400	1955	26500	3.51 × 10 ⁶	25	1000	1000	60	1.460	0.910	0.0150	W70
R1955MC14F	1400	1400	1955	26500	3.51 × 10 ⁶	30	1000	1000	60	1.460	0.910	0.0150	W70
R1955MC16D	1600	1600	1955	26500	3.51 × 10 ⁶	20	1000	1000	60	1.460	0.910	0.0150	W70
R1955MC16E	1600	1600	1955	26500	3.51 × 10 ⁶	25	1000	1000	60	1.460	0.910	0.0150	W70
R1955MC16F	1600	1600	1955	26500	3.51 × 10 ⁶	30	1000	1000	60	1.460	0.910	0.0150	W70
R2075MC12A	1200	1200	2075	29000	4.21 × 10 ⁶	10	300	1000	60	1.390	0.167	0.0150	W70
R2075MC12B	1200	1200	2075	29000	4.21 × 10 ⁶	12	300	1000	60	1.390	0.167	0.0150	W70
R2075MC12C	1200	1200	2075	29000	4.21 × 10 ⁶	15	300	1000	60	1.390	0.167	0.0150	W70
R2295HA22F	2200	2200	2295	30000	4.50 × 10 ⁶	30	875	1000	60	1.690	0.190	0.0110	W79
R2295HA22H	2200	2200	2295	30000	4.50 × 10 ⁶	40	875	1000	60	1.690	0.190	0.0110	W79
R2475ZC28M	2800	2800	2475	31000	4.81 × 10 ⁶	70	3900	4000	60	1.504	0.174	0.0110	W13
R2475ZC28N	2800	2800	2475	31000	4.81 × 10 ⁶	100	3900	4000	60	1.504	0.174	0.0110	W13
R2475ZC28R	2800	2800	2475	31000	4.81 × 10 ⁶	140	3900	4000	60	1.504	0.174	0.0110	W13
R2475ZD28M	2800	2800	2475	31000	4.81 × 10 ⁶	70	3900	4000	60	1.504	0.174	0.0110	W46
R2475ZD28N	2800	2800	2475	31000	4.81 × 10 ⁶	100	3900	4000	60	1.504	0.174	0.0110	W46
R2475ZD28R	2800	2800	2475	31000	4.81 × 10 ⁶	140	3900	4000	60	1.504	0.174	0.0110	W46
R2619ZC18J	1800	1800	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W13
R2619ZC18K	1800	1800	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W13
R2619ZC18L	1800	1800	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W13
R2619ZC20J	2000	2000	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W13
R2619ZC20K	2000	2000	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W13
R2619ZC20L	2000	2000	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W13
R2619ZC21J	2100	2100	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W13
R2619ZC21K	2100	2100	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W13
R2619ZC21L	2100	2100	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W13
R2619ZC25J	2500	2100	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W13
R2619ZC25K	2500	2100	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W13
R2619ZC25L	2500	2100	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W13
R2619ZD18J	1800	1800	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W46
R2619ZD18K	1800	1800	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W46
R2619ZD18L	1800	1800	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W46
R2619ZD20J	2000	2000	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W46
R2619ZD20K	2000	2000	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W46
R2619ZD20L	2000	2000	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W46
R2619ZD21J	2100	2100	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W46
R2619ZD21K	2100	2100	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W46
R2619ZD21L	2100	2100	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W46
R2619ZD25J	2500	2100	2619	33800	5.71 × 10 ⁶	50	1850	4000	60	1.308	0.173	0.0110	W46
R2619ZD25K	2500	2100	2619	33800	5.71 × 10 ⁶	60	1850	4000	60	1.308	0.173	0.0110	W46
R2619ZD25L	2500	2100	2619	33800	5.71 × 10 ⁶	65	1850	4000	60	1.308	0.173	0.0110	W46
R2620ZC22J	2200	2200	2620	33800	5.71 × 10 ⁶	50	2100	4000	60	1.500	0.143	0.0110	W13
R2620ZC22K	2200	2200	2620	33800	5.71 × 10 ⁶	60	2100	4000	60	1.500	0.143	0.0110	W13
R2620ZC22L	2200	2200	2620	33800	5.71 × 10 ⁶	65	2100	4000	60	1.500	0.143	0.0110	W13
R2620ZC25J	2500	2500	2620	33800	5.71 × 10 ⁶	50	2100	4000	60	1.500	0.143	0.0110	W13
R2620ZC25K	2500	2500	2620	33800	5.71 × 10 ⁶	60	2100	4000	60	1.500	0.143	0.0110	W13
R2620ZC25L	2500	2500	2620	33800	5.71 × 10 ⁶	65	2100	4000	60	1.500	0.143	0.0110	W13
R2620ZD22J	2200	2200	2620	33800	5.71 × 10 ⁶	50	2100	4000	60	1.500	0.143	0.0110	W46
R2620ZD22K	2200	2200	2620	33800	5.71 × 10 ⁶	60	2100	4000	60	1.500	0.143	0.0110	W46
R2620ZD22L	2200	2200	2620	33800	5.71 × 10 ⁶	65	2100	4000	60	1.500	0.143	0.0110	W46
R2620ZD25J	2500	2500	2620	33800	5.71 × 10 ⁶	50	2100	4000	60	1.500	0.143	0.0110	W46
R2620ZD25K	2500	2500	2620	33800	5.71 × 10 ⁶	60	2100	4000	60	1.500	0.143	0.0110	W46
R2620ZD25L	2500	2500	2620	33800	5.71 × 10 ⁶	65	2100	4000	60	1.500	0.143	0.0110	W46
R2714ZC14H	1400	1400	2714	35600	6.34 × 10 ⁶	40	1400	4000	60	1.250	0.163	0.0110	W13
R2714ZC14J	1400	1400	2714	35600	6.34 × 10 ⁶	50	1400	4000	60	1.250	0.163	0.0110	W13
R2714ZC14K	1400	1400	2714	35600	6.34 × 10 ⁶	60	1400	4000	60	1.250	0.163	0.0110	W13
R2714ZC18H	1800	1800	2714	35600	6.34 × 10 ⁶	40	1400	4000	60	1.250	0.163	0.0110	W13
R2714ZC18J	1800	1800	2714	35600	6.34 × 10 ⁶	50	1400	4000	60	1.250	0.163	0.0110	W13
R2714ZC18K	1800	1800	2714	35600	6.34 × 10 ⁶	60	1400	4000	60	1.250	0.163	0.0110	W13
R2714ZD14H	1400	1400	2714	35600	6.34 × 10 ⁶	40	1400	4000	60	1.250	0.163	0.0110	W46
R2714ZD14J	1400	1400	2714	35600	6.34 × 10 ⁶	50	1400	4000	60	1.250	0.163	0.0110	W46
R2714ZD14K	1400	1400	2714	35600	6.34 × 10 ⁶	60	1400	4000	60	1.250	0.163	0.0110	W46


High-Power Devices



W11
Weight 510 g




W36
Weight 500 g



W81
Weight 1.2 kg



W13
Weight 1.7 kg



W46
Weight 1.2 kg




W107
Weight 1.6 kg



W34
Weight 120 g



W58
Weight 90 g




W118
Weight 2.2 kg

Distributed Gate Thyristors—Capsule Types



Part Number	V _{DRM} V	V _{RRM} V	I _{TAV} T _K = 55 °C A	I _{TSM} A	I ² t 10 ms ½ sine V _R - ≤ 60% V _{RRM} A ² S	t _q @ 200 V/μs μs	Typ. Reverse Recovery Charge @ T _{JM}			V _{TO} r _T @ T _{JM} V mΩ		R _{thJK} 180° sine K/W	Fig. No.
							Q _{rr}	@ I _{TM}	@ -di/dt				
							μC	A	A/μs				
R2714ZD18H	1800	1800	2714	35600	6.34 × 10 ⁶	40	1400	4000	60	1.250	0.163	0.0110	W46
R2714ZD18J	1800	1800	2714	35600	6.34 × 10 ⁶	50	1400	4000	60	1.250	0.163	0.0110	W46
R2714ZD18K	1800	1800	2714	35600	6.34 × 10 ⁶	60	1400	4000	60	1.250	0.163	0.0110	W46
R3115TJ24J	2400	2400	3115	56000	15.68 × 10 ⁶	50	3350	2000	60	1.884	0.120	0.0080	W81
R3115TJ24K	2400	2400	3115	56000	15.68 × 10 ⁶	60	3350	2000	60	1.884	0.120	0.0080	W81
R3115TJ28J	2800	2800	3115	56000	15.68 × 10 ⁶	50	3350	2000	60	1.884	0.120	0.0080	W81
R3115TJ28K	2800	2800	3115	56000	15.68 × 10 ⁶	60	3350	2000	60	1.884	0.120	0.0080	W81
R3370ZC12C	1200	1200	3370	43900	9.64 × 10 ⁶	15	600	4000	60	1.353	0.064	0.0110	W13
R3370ZC12D	1200	1200	3370	43900	9.64 × 10 ⁶	20	600	4000	60	1.353	0.064	0.0110	W13
R3370ZC12E	1200	1200	3370	43900	9.64 × 10 ⁶	25	600	4000	60	1.353	0.064	0.0110	W13
R3370ZD12C	1200	1200	3370	43900	9.64 × 10 ⁶	15	600	4000	60	1.353	0.064	0.0110	W46
R3370ZD12D	1200	1200	3370	43900	9.64 × 10 ⁶	20	600	4000	60	1.353	0.064	0.0110	W46
R3370ZD12E	1200	1200	3370	43900	9.64 × 10 ⁶	25	600	4000	60	1.353	0.064	0.0110	W46
R3480TJ20J	2000	2000	3480	61000	18.61 × 10 ⁶	50	2930	2000	60	1.140	0.16	0.0080	W81
R3480TJ20K	2000	2000	3480	61000	18.61 × 10 ⁶	60	2930	2000	60	1.140	0.16	0.0080	W81
R3480TJ22J	2200	2200	3480	61000	18.61 × 10 ⁶	50	2930	2000	60	1.140	0.16	0.0080	W81
R3480TJ22K	2200	2200	3480	61000	18.61 × 10 ⁶	60	2930	2000	60	1.140	0.16	0.0080	W81
R4680EA24K	2400	2400	4680	67000	22.40 × 10 ⁶	60	3000	1000	60	1.509	0.128	0.0050	W107
R4680EA24L	2400	2400	4680	67000	22.40 × 10 ⁶	65	3000	1000	60	1.509	0.128	0.0050	W107
R4680EA24M	2400	2400	4680	67000	22.40 × 10 ⁶	70	3000	1000	60	1.509	0.128	0.0050	W107
R4680EA28K	2800	2800	4680	67000	22.40 × 10 ⁶	60	3000	1000	60	1.509	0.128	0.0050	W107
R4680EA28L	2800	2800	4680	67000	22.40 × 10 ⁶	65	3000	1000	60	1.509	0.128	0.0050	W107
R4680EA28M	2800	2800	4680	67000	22.40 × 10 ⁶	70	3000	1000	60	1.509	0.128	0.0050	W107
R5145FA42V	4200	4500	5145	66000	21.78 × 10 ⁶	250	12000	4000	60	1.659	0.107	0.0045	W118
R5145FA42W	4200	4500	5145	66000	21.78 × 10 ⁶	300	12000	4000	60	1.659	0.107	0.0045	W118
R5145FA45V	4500	4500	5145	66000	21.78 × 10 ⁶	250	12000	4000	60	1.659	0.107	0.0045	W118
R5145FA45W	4500	4500	5145	66000	21.78 × 10 ⁶	300	12000	4000	60	1.659	0.107	0.0045	W118
R5370EA18J	1800	1800	5370	70000	24.5 × 10 ⁶	50	3000	1000	60	1.661	0.071	0.0050	W107
R5370EA18K	1800	1800	5370	70000	24.5 × 10 ⁶	60	3000	1000	60	1.661	0.071	0.0050	W107
R5370EA22J	2200	2200	5370	70000	24.5 × 10 ⁶	50	3000	1000	60	1.661	0.071	0.0050	W107
R5370EA22K	2200	2200	5370	70000	24.5 × 10 ⁶	60	3000	1000	60	1.661	0.071	0.0050	W107



W116

Single Pre-Mounted Thyristors

Part Number	V_{RRM} V_{DRM}	I_{TAV}	@ T_C	I_{TRMS}	I_{TRMS} 125 °C 10 ms	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Isolation Voltage AC RMS, 50 Hz, 1 min	Package
									per Die			
	V	A	°C	A	A	V	mΩ	°C	K/W	K/W	V	
N4340TJ180MBR	1800	1110	85	3500	55000	0.886	0.105	125	0.031	0.0035	3000	W116
N4340TJ220MBR	2200	1110	85	3500	55000	0.886	0.105	125	0.031	0.0035	3000	W116


Single Pre-Mounted Diodes

Part Number	V_{RRM} V_{DRM}	I_{TAV}	@ T_C	I_{TRMS}	I_{TRMS} 150 °C 10 ms	V_{T0}	r_T	T_{VJM}	R_{thJC}	R_{thCH}	Isolation Voltage AC RMS, 50 Hz, 1 min	Package
									per Die			
	V	A	°C	A	A	V	mΩ	°C	K/W	K/W	V	
W8570TJ180MBR	1800	2830	85	6435	70200	0.69	0.050	175	0.031	0.0035	3000	W116
W8570TJ220MBR	2200	2830	85	6435	70200	0.69	0.050	175	0.031	0.0035	3000	W116
W9830TJ120MBR	1200	3345	85	7280	72000	0.67	0.043	190	0.031	0.0035	3000	W116
W9830TJ150MBR	1500	3345	85	7280	72000	0.67	0.043	190	0.031	0.0035	3000	W116


High-Power Devices



W40
Weight 430 g



W45
Weight 2 kg




W96
Weight 1.5 kg




W109
Weight 360 g




W41
Weight 1.2 kg



W67
Weight 650 g



W98
Weight 1.7 kg




W110
Weight 2.8 kg




W44
Weight 1.2 kg



W95
Weight 825 g



W103
Weight 3.2 kg



IGBTs—Capsule Types

Part Number	V_{CES} V	I_C A	I_{CM} A	$V_{CE(sat)}$ @ I_C V	IGBT Switching Typical		V_F $I_F = I_C$ V	Diode Recovery Typical			T_{JM} °C	R_{thJK}		Fig. No.
					E_{ON}	E_{OFF}		I_{rm}	t_{rr}	Q_r		IGBT	Diode	
					J	J		A	μs	μC		K/W	K/W	
T0115QB45G	4500	115	230	3.65	0.80	0.62	3.7	120	1.5	145	125	0.1080	0.172	W109
T0240NB45E	4500	240	480	3.6	1.50	1.00	N/A	N/A	N/A	N/A	125	0.0546	N/A	W40
T0340VB45G	4500	340	680	3.5	2.20	1.30	3.45	220	3.2	500	125	0.0364	0.0576	W67
T0510VB45E	4500	510	1020	3.5	3.30	2.20	N/A	N/A	N/A	N/A	125	0.0243	N/A	W67
T0600TB45A	4500	600	1200	3.7	3.60	2.50	3.7	640	1.2	700	125	0.0218	0.0432	W41
T0800TB45E	4500	800	1600	3.5	5.00	3.50	N/A	N/A	N/A	N/A	125	0.0156	N/A	W41
T0800EB45G	4500	800	1600	3.5	5.00	3.50	3.5	550	1.7	1020	125	0.0156	0.0247	W44
T0900EB45A	4500	900	1800	3.6	5.40	3.80	3.9	800	1.6	1000	125	0.0146	0.0288	W44
T1200EB45E	4500	1200	2400	3.6	7.00	5.50	N/A	N/A	N/A	N/A	125	0.0104	N/A	W44
T1600GB45G	4500	1600	3200	3.5	12.00	8.70	3.45	1270	1.75	1960	125	0.0078	0.0123	W45
T1800GB45A	4500	1800	3600	3.6	11.00	10.50	3.9	1600	1.6	2000	125	0.0073	0.0115	W45
T2000BB45G	4500	2000	4000	3.5	14.00	12.50	3.55	2050	1.6	2450	125	0.0064	0.0096	W110
T2400GB45E	4500	2400	4800	3.6	14.00	13.00	N/A	N/A	N/A	N/A	125	0.0052	N/A	W45
T2960BB45E	4500	3000	6000	3.6	11.50	17.50	N/A	N/A	N/A	N/A	125	0.0042	N/A	W110
T0258HF65G	6500	258	516	4.8	1.80	1.45	3.450	300	1.0	410	125	0.0328	0.0567	W95
T0385HF65E	6500	385	770	4.8	2.70	2.20	N/A	N/A	N/A	N/A	125	0.0219	N/A	W95
T0900AF65E	6500	900	1800	4.8	6.3	5.1	N/A	N/A	N/A	N/A	125	0.0094	N/A	W98
T0900DF65A	6500	900	1800	4.8	6.30	5.10	3.400	1050	1.0	1450	125	0.0094	0.0155	W96
T1290BF65A	6500	1290	2580	4.8	9.00	7.30	3.600	1400	1.0	1900	125	0.0066	0.0122	W103
T1375DF65E	6500	1375	2750	4.8	9.60	7.80	N/A	N/A	N/A	N/A	125	0.0062	N/A	W96
T1890BF65E	6500	1890	3780	4.8	13.20	10.60	N/A	N/A	N/A	N/A	125	0.0045	N/A	W103

Insulated Gate Bi-polar Transistors

As a pioneer of Press-Pack IGBT technology, Littelfuse offers a range of class-leading devices with voltage ratings of 4.5 kV (2.8 kV DC link) and 6.5 kV (3.6 kV DC link). These devices feature a wire-bond free and solder free construction, significantly improving the mechanical reliability compared to conventional modules. The device design minimizes internal stray inductance and incorporates direct emitter-side cooling, resulting in improved ruggedness and short circuit behavior.

These devices are based on a state-of-the-art soft punch through (SPT++) process, delivers low $V_{CE(sat)}$ and excellent soft switching behavior despite the high voltage ratings. A positive temperature coefficient enables reliable parallel operation. Devices are available with or without integral anti-parallel diode, and complimentary high-power sonic diodes are also offered.

Press-pack IGBTs exhibit exceptional power cycling performance, often an order of magnitude better than modules in other package configurations, making them ideal for applications with frequent load cycling, such as metal processing and traction drive systems. Their stable short circuit failure mode provides enhanced safety for medium- and high-voltage applications requiring series connection. This functionality allows system-level redundancy (n+1) eliminating the need for bypass switches and explosion proof enclosures. Typical applications include HVDC, FACTS, Active VAR controllers/compensators, and medium-voltage drives. For power levels exceeding 4 MW, press-pack IGBTs offer increased power density compared to multi-level/MMC-based designs using standard module packages.

These devices are largely backward-compatible with standard 4.5 kV GTO thyristors, providing a cost-effective solution for upgrading or refurbishing existing systems such as locomotives and medium-voltage drives.

They support a variety of cooling options, including direct liquid immersion and a complete range of associated parts is available, including gate drives, mounting clamps, and passive components.

Press-Pack IGBT Gate Drive Units

The C0044BG400 IGBT Gate Driver is a low-power consumption driver with on board VCE desaturation detection for high-reliability applications.

The driver includes a fibre-optic communication interface for drive, status, and switching feedback signals. It also integrates a fully supervised DC/DC converter with EMI filtering, low coupling capacitance, and high partial discharge. The high-voltage collector sense and gate interface are implemented on a separate card, allowing close coupling to the IGBT for improved performance. A range of pre-configured boards is available to complement press-pack IGBTs, with additional options available upon request.


Gate Drive Part Number	IGBT Type
C0044BG400SBX	T0115QB45G
C0044BG400SBL	T0240NB45E
C0044BG400SBQ	T0340VB45G
C0044BG400SBE	T0510VB45E
C0044BG400SBM	T0600TB45A
C0044BG400SBG	T0800EB45G
C0044BG400SBN	T0800TB45E
C0044BG400SBP	T0900EB45A
C0044BG400SBR	T1200EB45E
C0044BG400SBJ	T1600GB45G
C0044BG400SBS	T1800GB45A
C0044BG400SBZ	T2000BB45G
C0044BG400SBT	T2400GB45E
C0044BG400SBW	T2960BB45E

Features

- High reliability topology
- Designed for ultra low-power consumption
- Build-in DC/DC-converter with soft start
- Integrated input filter for low EMI
- Separate low-impedance path for parasitic EMI currents
- PD-Voltage levels available up to 11 kV on request
- Low impedance from gate to emitter at start-up and power fail
- Monitoring of all secondary supply voltages
- Monitoring of IGBT switching status (VCE-de-sat detection)
- Soft switch-OFF at VCE-de-sat fault condition
- Fiber-optic links for switching commands and status control
- Low-light protection for input signals
- Short-pulse suppression (configurable)
- Balanced propagation delay time
- Gate current up to 44 A
- Optional gate-speed-up capacitors

Application

- Large and medium drives
- Renewable generation
- Utilities; scale converters

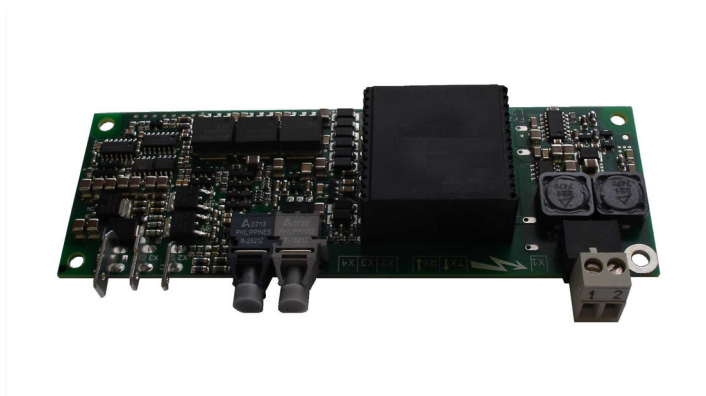

Power Semiconductor Accessories

With over 80 years of experience, our dedicated team of talented engineers delivers a wide variety of industry leading solutions ranging from simple standard sub-assemblies to complicated, multi-megawatt power systems.

The Power Electronic Stacks group has been an integral part of our core business since the early 1920s, when we began production on the first commercially available solid-state rectifiers.

Our dedicated global team of highly experienced specialists are on hand to provide our customers with first-class support on everything from a simple air-cooled rectifiers to highly integrated custom power converters.

IGBT Assemblies

Our catalogue of standard press-pack IGBT assemblies include a range of 3-level inverters. Three separate designs are available: a totally independent 3.3 kV system, a 6.6 kV system, and a 10 kV system. The 6.6 kV and 10 kV systems are based on the combination of two IGBT stacks and one diode stack. Each system benefits from direct water cooling to provide highly effective heat dissipation away from the devices and pre-loaded disc spring clamping to evenly distribute the applied force across the entire surface area of the device.

Pulsed Power

As a pioneer in the development of solid-state pulsed power components and systems, we deliver anything from discrete components to fully integrated energy transfer switches. With systems successfully delivering voltage ratings of over 50kV and pulsed currents of up to 140 kA, we have a wealth of experience at your disposal. Our modular design solutions based on either pulse thyristor or press-pack IGBT technology. Our integration of control and protection functions provides you with a flexible "black-box" approach to energy transfer problems.

Traction Applications

With over 40 years of experience, our dedicated team of engineers provides solutions to a wide range of design problems, ranging from simple trackside rectifiers to complex propulsion converters.

The Power Electronic Stacks group pioneered the early development of solid-state converters for traction systems in the late 1950s as part of the Westinghouse Brake & Signal Company. Over the years, we have gained an enviable reputation within the rail sector as a solution provider.



By leveraging our experience and broad network of contacts within the industry, we can offer assistance in tackling issues such as component obsolescence, improving power equipment reliability, contract maintenance of power modules, refurbishment of power electronics, upgrades to existing systems and, of course, subcontracting manufacturers for new projects.

Working systematically to the highest international standards, we can give your equipment a new lease on life and help protect your investments in these valuable assets.

Using the latest 3D modeling and simulation techniques, we can significantly reduce the cycle time from concept to fully developed design, minimizing risk and identifying opportunities for optimization early on in the project.

Our 300m² dedicated production facility in the UK is complemented by a well-equipped power lab. These facilities are supported by an expanded team of engineers and technicians as well as continued investment and growth in this strategic area of our business.

Also designed into each system are an integrated snubber circuit design and an isolated clamping rod system to limit the occurrence of Eddy currents within the unit.

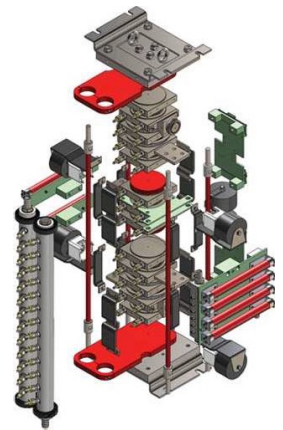

Component obsolescence is becoming a significant problem for the rail sector, as equipment design life invariably exceeds that of the modern power electronics components. Our highly skilled team of engineers can re-engineer older equipment to incorporate the latest technology whilst maintaining compatibility.

As equipment reaches its half-life, many of its major power components will reach the end of their useful life, resulting in a sharp decline in its reliability and availability. In these circumstances, we can offer a full overhaul and refurbishment program for your power electronics, from engineering analyses, tests, and measurements through to delivery and validation of refurbished equipment.

For larger projects such as fleet-wide refits, we can work within a consortium of specialist international companies to ensure that you have the right skills on hand to deliver turnkey solutions to your requirements. This may include system analysis, project management, risk assessment, and safety cases.

Custom Assemblies—Our Design Philosophy

From concept through development and manufacturing to after sales support, we strongly believe in working closely with our customer every step of the way—extending our philosophy of teamwork beyond our own organization.

We understand that good communication and close collaboration help us provide the very best services to our customers.

Using the latest 3D modeling techniques, we can visualize concepts and check form, fit, and function with virtual prototypes. In addition, by utilizing advanced software packages, we can carry out simulation modeling to model

pressure drops through coolers/manifolds and heat flows through heatsinks.

Whether finding solutions to complex engineering problems or simply manufacturing to your designs, you will find the Power Electronic Stacks Group offers outstanding value for money, excellent quality, and first-class customer service.

By working closely together from the very start of our projects, we aim to provide the best solutions on time and within budget.





Silicon Assemblies

A wide range of units is available, incorporating international-standard outline silicon semiconductors. Our products have gained a global reputation for quality in military, industrial, and domestic applications.

Standard extruded aluminum heatsink profiles are used for mounting discrete semiconductor devices in various configurations, for example:

• Single-phase diode bridges with current ratings	from	70	to	5710	Amps DC
• Single-phase half or fully controlled bridges	from	35	to	2200	Amps DC
• Three-phase diode bridges with current ratings	from	100	to	7190	Amps DC
• Three-phase half or fully controlled bridges	from	45	to	3790	Amps DC
• Hexaphase single way diode assemblies	from	200	to	14380	Amps DC
• Hexaphase single way thyristor assemblies	from	90	to	7580	Amps DC
• AC regulators, single and three-phase	from	40	to	2940	Amps RMS

Included in our standard range are solid-state, water-cooled AC regulators for resistance welding, with ratings from 315 to 3020 Amps RMS. Also available are water-cooled, single and three-phase assemblies from 1200 to 6000 Amps RMS. All the above ranges are suitable for 440 V_{RMS}, 50 Hz mains operation.



Beyond Semiconductors

Our flexible manufacturing facility can readily adapt to our customers' needs. In addition to power semiconductor assembly, we offer complementary sub-assemblies tailored to our customers' requirements, such as fuse panels and capacitor banks. Lastly, we can also contract manufacturers for your designs.



Application and engineering support

Our highly experienced technical team is on hand to provide our customers with first-class support for everything from the applications of our range of discrete devices to the design and development of complex systems. We can help you from concept through design, to manufacturing and tests, working closely with you every step of the way.






Components

To complement our range of power semiconductors and assemblies, we offer a range of supporting components, including:

- Heatsinks
- Coolers
- Mounting clamps
- Ultra-rapid semiconductor protection fuses
- Capacitors
 - Snubbers
 - Rectification
 - Specialist DC link
- Gate drive units



Westack—Modular Solutions

Assembly Part Number	I _{DC} amps Air Forced 2.5m/s			I _{FSM} amps I _{TSM} amps	I ² t A ² s	Dimensions (mm)				Mass kg	Device Type and Quantity	Heat Sink Type		
	T _a = 25°C	T _a = 35°C	T _a = 45°C			Fig.	W	H	D					
Single-Phase Diode Bridges						Approx. Total Loss 2 × I _{DC} @ 25°C								
SXB1375B	1375	1303	1230	19500	1.9 × 10 ⁶	1	382	325	405	20	W2058LC (4)	B (2 × 83.1 × 180)		
SXB2096B	2096	1987	1874	33000	5.45 × 10 ⁶	1	382	325	405	20	W3270NC (4)	B (2 × 83.1 × 180)		
SXB3442B	3442	3277	3109	53000	13.5 × 10 ⁶	2	382	593	405	40	W5696VC (4)	B (2 × 180)		
SXB4264B	4264	4051	3835	72000	22.5 × 10 ⁶	2	382	593	405	40	W8405ZC (4)	B (2 × 180)		
Three-Phase Diode Bridges						Approx. Total Loss 2.5 × I _{DC} @ 25°C								
SXB1920G	1920	1822	1721	19500	1.9 × 10 ⁶	3	548	325	405	30	W2058LC (6)	B (2 × 83.1 × 180)		
SXB2939G	2939	2788	2634	33000	5.45 × 10 ⁶	3	548	325	405	30	W3270NC (6)	B (2 × 83.1 × 180)		
SXB4869G	4869	4640	4407	53000	13.5 × 10 ⁶	4	548	593	405	60	W5696VC (6)	B(2 × 180)		
SXB5993G	5993	5701	5402	72000	22.5 × 10 ⁶	4	548	593	405	60	W8405ZC (6)	B(2 × 180)		
Six-Phase Diode. Single Way With IPT						Approx. Total Loss 1.25 × I _{DC} @ 25°C								
SXB3840HEX	3840	3644	3442	19500	1.9 × 10 ⁶	5	548	325	395	30	W2058LC (6)	B (2 × 83.1 × 180)		
SXB5877HEX	5877	5576	5268	33000	5.45 × 10 ⁶	5	548	325	395	30	W3270NC (6)	B (2 × 83.1 × 180)		
SXB9737HEX	9737	9281	8813	53000	13.5 × 10 ⁶	6	548	593	395	60	W5696VC (6)	B (2 × 180)		
SXB11987HEX	11987	11401	10804	72000	22.5 × 10 ⁶	6	548	593	395	60	W8405ZC (6)	B (2 × 180)		
Six-Phase Thyristor. Single Way With IPT						Approx. Total Loss 1.5 × I _{DC} @ 25°C								
SXB3529HEXT	3529	3244	2949	29600	4.38 × 10 ⁶	5	548	325	395	30	N1802LC (6)	B (2 × 83.1 × 180)		
SXB4649HEXT	4649	4270	3878	37000	6.85 × 10 ⁶	6	548	593	395	60	N2500VC (6)	B (2 × 180)		
SXB6240HEXT	6240	5714	5173	64000	20.5 × 10 ⁶	6	548	593	395	60	N4085ZC (6)	B (2 × 180)		
Single-Phase Fully Controlled Bridges						Approx. Total Loss 2.5 × I _{DC} @ 25°C								
SXB1265FB	1265	1161	1054	29600	4.38 × 10 ⁶	1	382	325	405	20	N1802NC (4)	B (2 × 83.1 × 180)		
SXB1645FB	1645	1508	1367	37000	6.85 × 10 ⁶	2	382	593	405	40	N2500VC (4)	B (2 × 180)		
SXB2167FB	2167	1981	1790	64000	20.5 × 10 ⁶	2	382	593	405	40	N4085ZC (4)	B (2 × 180)		
Three-Phase Fully Controlled Bridges						Approx. Total Loss 3 × I _{DC} @ 25°C								
SXB1764FG	1764	1622	1475	29600	4.38 × 10 ⁶	3	548	325	405	30	N1802NC (6)	B (2 × 83.1 × 180)		
SXB2324FG	2324	2135	1939	37000	6.85 × 10 ⁶	4	548	593	405	60	N2500VC (6)	B (2 × 180)		
SXB3120FG	3120	2857	2586	64000	20.5 × 10 ⁶	4	548	593	405	60	N4085ZC (6)	B (2 × 180)		

Westack—Modular Solutions

Cooling for each module section is provided using a low noise 115 / 230 V AC fan that is protected against overloading by an integral thermal cut-out.

Surge suppression and fusing provide reliable and safe operation. Surge suppression (which protects devices from voltage transients) and high-speed fuses (which protect against short circuits) are available.

All plastic components are UL-recognized and meet the requirements of the European Union Directive 2002 / 95 / EC covering the restricted use of certain hazardous substances in electrical and electronic equipment.

ISO 9000 provides the standard against which all our products and services are measured.



Figure 1
Weight 20 kg




Figure 2
Weight 40 kg



Figure 3
Weight 20 kg



Figure 4
Weight 60 kg



Figure 5
Weight 30 kg

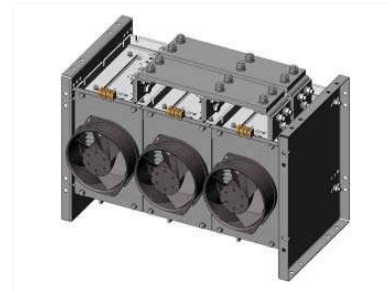


Figure 6
Weight 60 kg




WestackLITE–Modular Solutions

A simple but highly efficient selection of stacks that incorporate the WESPACK range of phase control thyristors.

Currently available in three standard configurations:

- AC voltage regulators
- Single-phase bridges
- Three-phase bridges

These stacks can easily be modified to meet individual customer requirements. Fully dimensioned drawings are available upon request from the Chippenham Factory.

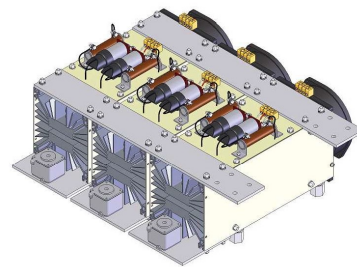

Features and Benefits

WESPACK devices provide a maximum power rating for weight and volume without compromising on quality and reliability.

Cooling is provided by means of a low-noise, dual-voltage (230 V / 115 V) AC fan that is protected against overloading by an integral thermal cut-out.

Surge suppression and fusing can be added to protect the devices from voltage transients and short circuits.

ISO 9001:2015 provides the standard against which all our products and services are measured.

Figure 1
Weight 10 kg




Figure 2
Weight 20 kg





Figure 3
Weight 30 kg



WestackLITE–Modular Solutions

Assembly Part Number	I _{DC} amps Air Forced 2.5m/s			I _{FSM} amps I _{TSM} amps	I ² t A²s	Dimensions (mm)				Mass kg	Device Type and Quantity	Heat Sink Type		
	T _a = 25°C	T _a = 35°C	T _a = 45°C			Fig.	W	H	D					
AC Regulators						Approx. Total Loss 1.3 × I _{RMS}								Figure 1
SXC1195FR	1195	1098	997	19100	1.82 × 10 ⁶	1	168	415	212	10	N1806QK (2)	(2 × 150. 1 × 330)		
SXC1464FR	1464	1348	1227	32400	5.25 × 10 ⁶	1	168	415	212	10	N2367MK (2)	(2 × 150. 1 × 330)		
SXC1788FR	1788	1636	1480	50900	12.95 × 10 ⁶	1	168	415	212	10	N3904HK (2)	(2 × 150. 1 × 330)		
Single Phase Fully Controlled Bridges						Approx. Total Loss 2.5 × I _{DC}								Figure 2
SXC1076FB	1076	988	897	19100	1.82 × 10 ⁶	2	330	415	212	20	N1806QK (4)	(2 × 150. 1 × 330)		
SXC1318FB	1318	1213	1104	32400	5.25 × 10 ⁶	2	330	415	212	20	N2367MK (4)	(2 × 150. 1 × 330)		
SXC1609FB	1609	1473	1332	50900	12.95 × 10 ⁶	2	330	415	212	20	N3904HK (4)	(2 × 150. 1 × 330)		
Three Phase Fully Controlled Bridges						Approx. Total Loss 3 × I _{DC}								Figure 3
SXC1517FG	1517	1396	1270	19100	1.82 × 10 ⁶	3	492	415	212	30	N1806QK (6)	(2 × 150. 1 × 330)		
SXC1871FG	1871	1725	1573	32400	5.25 × 10 ⁶	3	492	415	212	30	N2367MK (6)	(2 × 150. 1 × 330)		
SXC2319FG	2319	2125	1926	50900	12.95 × 10 ⁶	3	492	415	212	30	N3904HK (6)	(2 × 150. 1 × 330)		

Power Semiconductor Accessories

As part of our continuing commitment to meet our customers' demands, we offer a range of products to support our high-power semiconductor devices and our silicon assembly business.

The following pages show a selection of accessories available to our customers, from heatsinks and coolers to bar or box clamps:

Part Number	Old Part Number	Accessory
XST1000M08P	PTFE1000M8	M8 PTFE tube × 1 m length insulation
XST1000M10P	PTFE1000M10	M10 PTFE tube × 1 m length insulation
XST1000M12P	PTFE1000M12	M12 PTFE tube × 1 m length insulation
XST1000M16P	PTFE1000M16	M16 PTFE tube × 1 m length insulation
L0001YC600XXX	n/a	30 mm diameter electrode Insulator Capsule
L0001QC600XXX	n/a	38 mm diameter electrode Insulator Capsule
L0001NC600XXX	n/a	47 mm diameter electrode Insulator Capsule
L0001HC600XXX	n/a	66 mm diameter electrode Insulator Capsule
L0001ZF600XXX	n/a	73 mm diameter electrode Insulator Capsule
L0001TC600XXX	n/a	75 mm diameter electrode Insulator Capsule

Part Number	Old Part Number	Accessory	Type
XSL200D8WRC	U9948	200 mm long single Co-Axial cable, Red / White, M5 ring terminal for Ø75 IGBT & below	IGBT
XSL200D8WRCP	U9947	200 mm long double Co-Axial cable, Red / White, M5 ring terminal for Ø85 IGBT & above	IGBT
XSL220C2WRT	–	220 mm long twisted pair, Silicone sleeve cable 16 / 0.2, Red / White, M4 ring terminal	Thyristor
XSL300C2WRP	U9900	300 mm long pair, Silicone sleeve cable 16 / 0.2, Red / White, M4 ring terminal	Thyristor
XSL300C2WS	U9900 (Gate Only)	300 mm long gate wire, Silicone sleeve cable 16 / 0.2, White, M4 ring terminal	Thyristor
XSL350C2WRP	U9723	350 mm long pair, Silicone sleeve cable 16 / 0.2, Red / White, M4 ring terminal	Thyristor
XSL400C2WRP	U9860	400 mm long pair, Silicone sleeve cable 16 / 0.2, Red / White, M4 ring terminal	Thyristor
XSL500C2WRP	U9855	500 mm long pair, Silicone sleeve cable 16 / 0.2, Red / White, M4 ring terminal	Thyristor
XSL600C2WRP	U9775	600 mm long pair, Silicone sleeve cable 16 / 0.2, Red / White, M4 ring terminal	Thyristor
XSL1000C2WRP	U9734 / U9801 / U9849	1000 mm long pair, Silicone sleeve cable 16 / 0.2, Red / White, M4 ring terminal	Thyristor
XSL1000C2WRT	U9952	1000 mm long twisted pair, Silicone sleeve cable 16 / 0.2, Red / White, M4 ring terminal	Thyristor
XSL1100C2WRT	U9779	1100 mm long twisted pair, Silicone sleeve cable 16 / 0.2, Red / White, M4 ring terminal	Thyristor

Stacks and Accessories



WC18



WC45



WC48/49



WC50

Standard Bar Clamps

Part Number	Fixing Centers	Rod Size	Outline	Mounting Surface Diameter	Nominal Thickness	T _J Max. °C	Outline No.
	mm			mm	mm		
XK0450DA056M	65	M8	DO-200AA / TO-200AB	19.0	13.8	190	WC2
XK0450DT056M	65	M8	DO-200AA / TO-200AB	19.0	13.8	190	WC3
XK0450SA056M	65	M8	DO-200AA / TO-200AB	19.0	13.8	190	WC1
XK0900DA056M	65	M8	Diode / Thyristor	25.1	14.6	190	WC7
XK0900DT056M	65	M8	Diode / Thyristor	25.1	14.6	190	WC8
XK0900SA056M	65	M8	Diode / Thyristor	25.1	14.6	190	WC6
XK0600DA074M	89	M10	Press-Pack IGBTs	47.0	27	190	WC10
XK0600SA074M	89	M10	Press-Pack IGBTs	47.0	27	190	WC9
XK1000DA074M	89	M10	Press-Pack IGBTs	47.0	27	190	WC12
XK1000SA074M	89	M10	Press-Pack IGBTs	47.0	27	190	WC11
XK1100DA076M	89	M10	DO-200AB / TO-200AC	34.0	26.2	190	WC13
XK1130DA076M	89	M10	DO-200AB / TO-200AC	34.0	26.2	190	WC15
XK1130DT076M	89	M10	DO-200AB / TO-200AC	34.0	26.2	190	WC16
XK1130SA076M	89	M10	DO-200AB / TO-200AC	34.0	26.2	190	WC14
XK1800DA076M	89	M10	Wespack PCT	38.0	14	190	WC18
XK1800DT076M	89	M10	Wespack PCT	38.0	14	190	WC19
XK1800SA076M	89	M10	Wespack PCT	38.0	14	190	WC17
XK2140DA076M	89	M10	DO-200	47.0	26.8	190	WC23
XK2140DA076ML	89	M10	DO-200 / Thyristor	47.0	26.8	125	WC23
XK2140DT076M	89	M10	DO-200	47.0	26.8	190	WC24
XK2140DT076ML	89	M10	DO-200 / Thyristor	47.0	26.8	125	WC24
XK2140SA076M	89	M10	DO-200	47.0	26.8	190	WC22
XK2140SA076ML	89	M10	DO-200 / Thyristor	47.0	26.8	125	WC22
XK2700DA076M	89	M10	Wespack PCT	50.0	14	190	WC26
XK2700DT076M	89	M10	Wespack PCT	50.0	14	190	WC27
XK2700SA076M	89	M10	Wespack PCT	50.0	14	190	WC25
XK2000DA114M	132	M12	Press-Pack IGBTs	75.0	26	190	WC29
XK2000SA114M	132	M12	Press-Pack IGBTs	75.0	26	190	WC28
XK2500DA114M	132	M12	Press-Pack IGBTs	75.0	26	190	WC31
XK2500SA114M	132	M12	Press-Pack IGBTs	75.0	26	190	WC30
XK2500DA116M	132	M12	GTO	63.0	26	190	WC33
XK2500DA116ML	132	M12	GTO	63.0	26	125	WC33

Standard Bar Clamps

Part Number	Fixing Centers	Rod Size	Outline	Mounting Surface Diameter	Nominal Thickness	T _J Max. °C	Outline No.
	mm			mm	mm		
XK2500SA116M	132	M12	GTO	63.0	26	190	WC32
XK2500SA116ML	132	M12	GTO	63.0	26	125	WC32
XK3000DA116M	132	M12	DO-200AD	63.0	33	190	WC35
XK3000DA116ML	132	M12	DO-200AD / Thyristor	63.0	33	125	WC35
XK3000SA116M	132	M12	DO-200AD	63.0	33	190	WC34
XK3000SA116ML	132	M12	DO-200AD / Thyristor	63.0	33	125	WC34
XK3500DA116M	132	M12	GTO	75.0	26	190	WC37
XK3500DA116ML	132	M12	GTO	75.0	26	125	WC37
XK3500SA116M	132	M12	GTO	75.0	26	190	WC36
XK3500SA116ML	132	M12	GTO	75.0	26	125	WC36
XK4000DA116M	132	M12	Diode / Thyristor	73.0	36.8	190	WC39
XK4000DA116ML	132	M12	Thyristor	73.0	36.8	125	WC39
XK4000SA116M	132	M12	Diode / Thyristor	73.0	36.8	190	WC38
XK4000SA116ML	132	M12	Thyristor	73.0	36.8	125	WC38
XK5000DA128M	146	M16	GTO	75.0	26	190	WC40
XK5000DA128ML	146	M16	GTO	75.0	26	125	WC40
XK7000DA128M	146	M16	Diode / Thyristor	75.0	26.6	190	WC41
XK7000DA128ML	146	M16	Thyristor	75.0	26.6	125	WC41
XK3060DA140ML	154	M12	Press-Pack IGBTs	85.1	26	125	WC43
XK3060SA140ML	154	M12	Press-Pack IGBTs	85.1	26	125	WC42
XK9000SA160M	180	M16	Diode / Thyristor	99.3	35.8	190	WC44
XK9000SA160ML	180	M16	Thyristor	99.3	35.8	125	WC44
XK9000DA160M	180	M16	Diode / Thyristor	99.3	35.8	190	WC45
XK9000DA160ML	180	M16	Thyristor	99.3	35.8	125	WC45
XK6120DA180ML	196	M16	Press-Pack IGBTs	125.0	26	125	WC46
XK6120SA180ML	196	M16	Press-Pack IGBTs	125.0	26	125	WC47
XK8000DA180ML	196	M16	Press-Pack IGBTs	132.0	26	125	WC67
XK8000SA180ML	196	M16	Press-Pack IGBTs	132.0	26	125	WC68

Standard Bar Clamp Kits

These single-side cooled square base mounting clamps are for capsule type rectifier diodes & phase control thyristors. They are suitable for 34 mm to 50 mm diameter electrode devices with clamping forces that range from 1130 Kgf to 2140 Kgf. They are suitable for devices with blocking voltages from 400 V up to 6 KV.

Part Number	Electrode Diameter	Outline
XK1500CB034M	34 - 38	WC64
XK1130SB076M	34 - 38	WC65
XK2140SB076M	47 - 50	WC66

Standard part replacements for the obsolete flat-base power silicon diodes types KBN/R, KCN/R, and KDN/R. For other voltages and thyristor options, please consult the factory.

Stacks and Accessories



WC58



WC60



WC62



WC59




WC61



WC63

Standard Bar Clamps

Range	Part Number	#### = Force	Max cell dia. mm	T _{JMAX} °C	xxx = max Z - dim range	Outline No.
		kgf			mm	
XSK042	XSK####DA042xxx	0500 / 0900	42	190	025 - 076*	WC58
	XSK####DT042xxx	0500 / 0900	42	190	025 - 076*	WC59
	XSK####DF042xxx	0500 / 0900	42	190	025 - 076*	WC60
XSK054	XSK####DA054xxx	900	54	190	025 - 076*	WC58
	XSK####DT054xxx	900	54	190	025 - 076*	WC59
	XSK####DF054xxx	900	54	190	025 - 076*	WC60
XSK056	XSK####DA056xxx	0500 / 0900	56	190	038 - 120*	WC58
	XSK####DT056xxx	0500 / 0900	56	190	038 - 120*	WC59
	XSK####DF056xxx	0500 / 0900	56	190	038 - 120*	WC60
	XSK####DA056xxx	1500	56	190	038 - 120*	WC58/SP
	XSK####DT056xxx	1500	56	190	038 - 120*	WC59/SP
	XSK####DF056xxx	1500	56	190	038 - 120*	WC60/SP
XSK065	XSK####DA065xxx	0500 / 0900	65	190	038 - 120*	WC58
	XSK####DT065xxx	0500 / 0900	65	190	038 - 120*	WC59
	XSK####DF065xxx	0500 / 0900	65	190	038 - 120*	WC60
	XSK####DA065xxx	1500	65	190	038 - 120*	WC58/SP
	XSK####DT065xxx	1500	65	190	038 - 120*	WC59/SP
	XSK####DF065xxx	1500	65	190	038 - 120*	WC60/SP
XSK075	XSK####DA075xxx	0900 / 1500	75	190	038 - 120*	WC58
	XSK####DT075xxx	0900 / 1500	75	190	038 - 120*	WC59
	XSK####DF075xxx	0900 / 1500	75	190	038 - 120*	WC60
	XSK####DA075xxx	2200	75	190	038 - 120*	WC61
	XSK####DT075xxx	2200	75	190	038 - 120*	WC62
	XSK####DF075xxx	2200	75	190	038 - 120*	WC63
XSK087	XSK####DA087xxx	1500 / 2200	87	190	038 - 120*	WC61
	XSK####DT087xxx	1500 / 2200	87	190	038 - 120*	WC62
	XSK####DF087xxx	1500 / 2200	87	190	038 - 120*	WC63
	XSK####DA087xxx	3000	87	190	038 - 120*	WC61/SP
	XSK####DT087xxx	3000	87	190	038 - 120*	WC62/SP
	XSK####DF087xxx	3000	87	190	038 - 120*	WC63/SP
XSK103	XSK####DA103xxx	2200	103	190	038 - 120*	WC58/SP
	XSK####DF103xxx	2200	103	190	038 - 120*	WC60/SP
	XSK####DA103xxx	3200	103	190	038 - 120*	WC61/SP
	XSK####DF103xxx	3200	103	190	038 - 120*	WC63/SP
	XSK####DA103xxx	4000	103	190	038 - 120*	WC61/SP
	XSK####DF103xxx	4000	103	190	038 - 120*	WC63/SP
XSK112	XSK####DA112xxx	2800 / 3200 / 3800 / 4500	112	190	038 - 120*	WC61/SP
	XSK####DF112xxx	2800 / 3200 / 3800 / 4500	112	190	038 - 120*	WC63/SP
XSK120	XSK####DA120xxx	3800 / 4500 / 5000	120	190	050 - 120*	WC61/SP
	XSK####DF120xxx	3800 / 4500 / 5000	120	190	050 - 120*	WC63/SP
XSK126	XSK####DA126xxx	3800 / 4500 / 5000	126	190	050 - 120*	WC61/SP
	XSK####DF126xxx	3800 / 4500 / 5000	126	190	050 - 120*	WC63/SP
XSK160	XSK####DA160xxx	8000 / 9000	160	190	050 - 120*	WC61/SP
	XSK####DF160xxx	8000 / 9000	160	190	050 - 120*	WC63/SP

**WC48/49****WC52****WC55****WC50****WC53****WC56****WC51****WC54****WC57**

Bar Clamps

Range	A	A1	B	C	C1	D	E	F	G	H	Fixing
XSK042	69.85	74.89	54.00	15.88	21.04	42.00	8.64	PCF	PCF	12.70	M6
XSK054	82.55	86.04	65.00	15.88	21.04	54.00	8.62	34.93	PCF	12.70	M6
XSK056	95.25	–	70.00	25.40	–	56.00	12.19	PCF	PCF	9.53	M8
XSK065	104.39	–	79.00	25.40	–	65.00	12.19	PCF	PCF	12.70	M8
XSK075	112.78	–	89.00	25.40	–	75.00	12.19	PCF	PCF	12.70	M8
XSK087	127.00	–	102.00	25.40	–	87.00	12.19	PCF	PCF	19.05	M8
XSK103 (2200/3200)	144.78	–	118.00	25.40	36.00	103.00	12.19	PCF	PCF	19.05	M8
XSK103 (4000)	144.78	154.11	118.00	25.40	36.00	103.00	16.56	PCF	PCF	19.05	M10
XSK112	165.02	–	132.00	25.40	36.00	112.00	16.56	PCF	PCF	25.40	M10
XSK120	172.72	–	140.00	25.40	36.00	120.00	16.56	PCF	PCF	25.40	M10
XSK126	181.1	–	146	25.4	36	126	16.56	PCF	PCF	25.4	M10
XSK160	216.07	–	180	38.1	–	160	16.56	PCF	PCF	38.1	M12

Notes:


PCF = Dimension is dependent on clamp force and cell height. Please consult the factory.

"A1" dimension only shown where "A1" is larger than "A".

"C1" dimension only shown where "C1" is larger than "C".

All dimensions in mm.


Stacks and Accessories




WH1




WH2



WH3



WH4



WH5



WH6



WH7



WH8

Bar Clamps for WESPACK™

Part Number	Rod Size & Length	Insulator Size & Length	Fixing Centers	Electrode Diameter	Clamp Forces	"Z"	"D"	Fig. No.
	mm	mm				mm	mm	
XSK1500DA076038	M8 × 90	M8 × 60	89.0	32	10kN to 20 kN	38	27.5	WC51
XSK1500DA076076	M8 × 130	M8 × 95	89.0	32	10kN to 20 kN	76	62.5	WC51
XSK1500DA076101	M8 × 160	M8 × 120	89.0	32	10kN to 20 kN	101	87.6	WC51
XSK2000DA076038	M8 × 95	M8 × 60	89.0	38	13kN to 20 kN	38	25.9	WC52
XSK2000DA076076	M8 × 130	M8 × 95	89.0	38	13kN to 20 kN	76	61.0	WC52
XSK2000DA076101	M8 × 160	M8 × 120	89.0	38	13kN to 20 kN	101	85.9	WC52
XSK3000DA076038	M8 × 100	M8 × 65	89.0	50	25kN to 31 kN	38	26.2	WC53
XSK3000DA076076	M8 × 130	M8 × 100	89.0	50	25kN to 31 kN	76	56.1	WC53
XSK3000DA076101	M8 × 160	M8 × 125	89.0	50	25kN to 31 kN	101	86.1	WC53
XSK3400DA076038	M8 × 100	M8 × 65	89.0	50	27kN to 34 kN	38	24.6	WC54
XSK3400DA076076	M8 × 140	M8 × 105	89.0	50	27kN to 34 kN	76	64.5	WC54
XSK3400DA076101	M8 × 160	M8 × 130	89.0	50	27kN to 34 kN	101	89.7	WC54
XSK3800DA116M076	M10 × 150	M12 × 100	132.0	66	32kN to 38 kN	76	59.7	WC55
XSK3800DA116M101	M10 × 180	M12 × 125	132.0	66	32kN to 38 kN	101	84.6	WC55
XSK4400DA116M076	M10 × 150	M12 × 105	132.0	68	36kN to 44 kN	76	63.0	WC56
XSK4400DA116M101	M10 × 180	M12 × 130	132.0	68	36kN to 44 kN	101	87.9	WC56
XSK6000DA116M076	M10 × 150	M12 × 105	132.0	75	50kN to 60 kN	76	59.9	WC57
XSK6000DA116M101	M10 × 180	M12 × 130	132.0	75	50kN to 60 kN	101	84.8	WC57







Notes: 1 kgf = 9.8 Newtons

Box Clamps

Part Number	Moulded Box Style	Fixing Centers	Rod Size	Capsule Device			Outline Ref.
				Outline	Mounting Surface Ø	Normal Thickness	
					mm	mm	
XK0450BA019M	Injection	50 PCD	M5x50 Bolts	W1 / W8 / W90	19.0	13.8	WC48
XK0450BA025M	Injection	50 PCD	M5x50 Bolts	W2 / W58	25.1	14.6	WC49
XK1000BA025M	Injection	50 PCD	M5x50 Bolts	W91	25.1	14.0	WC49
XK1500BA034M	Injection	70 PCD	M6x50 Bolts	W4 / W10 / W92	34.0	26.2	WC50

Heatsinks

Part Number	Weight	Periphery	Area	Fig.
	kg/m	mm	mm ²	
XSFGxxxxAN	8.1	1059	2979	WH1
XSFGAxxxxAN	15.6	1682	5867	WH2
XSFGHxxxxAN	12.7	1684	4655	WH3
XSFTxxxxAN	20	2065	7573	WH4
XSFTBxxxxAN	29	2467	10905	WH5
XSFTCxxxxAN	28	2544	10561	WH6
XSFLPxxxxAN	30	6620	11172	WH7
XSFL6xxxxAN	20	2822	7411	WH8
XSFL30xxxxAN	Dimensions 125 mm × 125 mm × 4 vanes			


**WCL1****WCL5****WCL11****WCL12-WS71-1****WCL2****WCL6****WCL16****WCL13-WS71-2****WCL3****WCL7****WCL17****WCL14-WS72-1****WCL4****WCL10****WCL9-WS65****WCL15-WS72-2**

Coolers


Part Number	Weight	Cooler Thickness	Busbar Thickness	Description	Fig. No.
	kg	mm	mm		
XW076NC16A	0.418	16	N/A	47 mm WC Cu	WCL2
XW076NC16B	0.612	16	6,4	47 mm WC Cu with Busbar (10 mm Hose)	WCL1
XW076NC16BS	0.612	16	6,4	47 mm WC Cu with Busbar + spirol pins fitted (10 mm Hose)	WCL1
XW076NC16BT	0.612	16	6,4	47 mm WC Cu with Busbar + thermostat hole (10 mm Hose)	WCL1
XW076NC16C	0.612	16	6,4	47 mm WC Cu with Busbar (½" Hose)	WCL1
XW076NC16CT	0.612	16	6,4	47 mm WC Cu with Busbar + thermostat hole (½" Hose)	WCL1
XW076NC16R	0.581	16	6,35	47 mm WC Cu reversed with Busbar	WCL12
XW076NC16W	0.400	16	N/A	47 mm WC Cu reversed	WCL13
XW116ZC20A	1.300	20	N/A	73 mm WC Cu	WCL4
XW116ZC20B	1.750	20	10	73 mm WC Cu with Busbar	WCL3
XW116ZC20C	2.120	20	10	73 mm WC Cu with alt, Busbar	WCL5
XW116ZC20R	1.672	20	10	73 mm WC Cu reversed with Busbar	WCL14
XW116ZC20W	1.119	20	N/A	73 mm WC Cu reversed	WCL15
XW127EC25A	1.650	25	N/A	85 mm WC Cu Helix	WCL16
XW127EC25B	2.200	25	8	85 mm WC Cu with Busbar Helix	WCL17
XW127EA25A	0.500	25	N/A	85 mm WC Al Helix	WCL16
XW127EA25B	0.650	25	8	85 mm WC Al with Busbar Helix	WCL17
XW160FC25A	3.620	25	N/A	100 mm WC Cu	WCL6
XW160FC25B	4.520	25	10	100 mm WC Cu with Busbar	WCL7
XW180GC34A	4.920	34	N/A	125 mm WC Cu Helix	WCL11
XW180GC34B	5.950	34	10	125 mm WC Cu with Busbar Helix	WCL10
XW180GA34A	1.500	34	N/A	125 mm WC Al Helix	WCL11
XW180GA34B	1.800	34	10	125 mm WC Al with Busbar Helix	WCL10
XW180BA34E	1.550	34	N/A	132 mm WC Al Helix	WCL19
XW180BA34F	1.850	34	10	132 mm WC Al with Busbar Helix	WCL20
XW270QA25A	2.941	25	N/A	270 × 190 mm WC Al Cold Plate	WCL9

Part Number	Cooler Accessories
XSNM12H10S	M12 Cooler Connection, 10mm Hose & Stainless Steel material
XSNM12H12S	M12 Cooler Connection, 12mm Hose & Stainless Steel material


W1 - 100A241

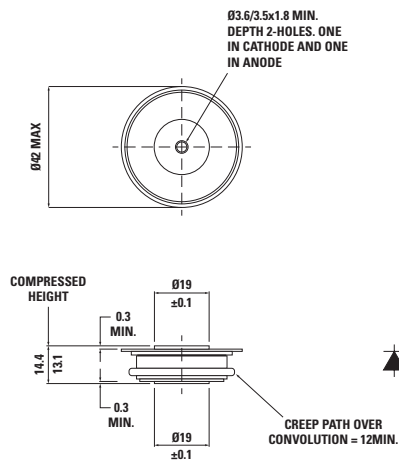


W2 - 100A291

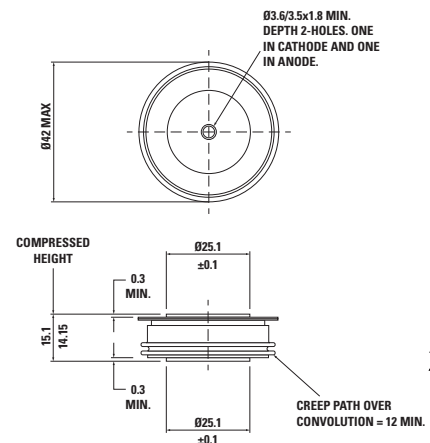


W3 - 100A317

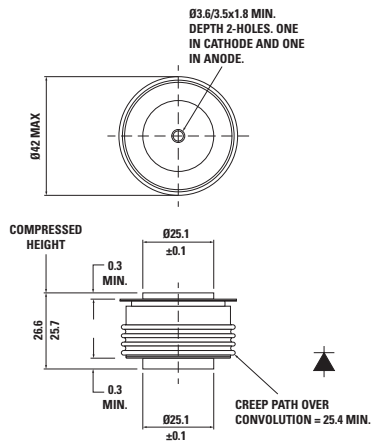


W4 - 100A243

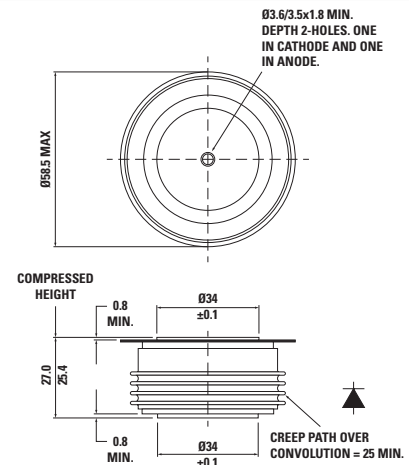


W5 - 100A249

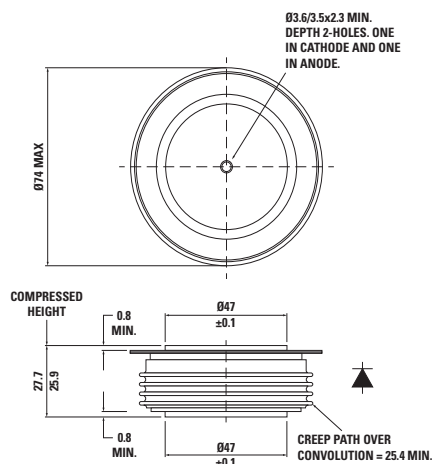


W6 - 100A270

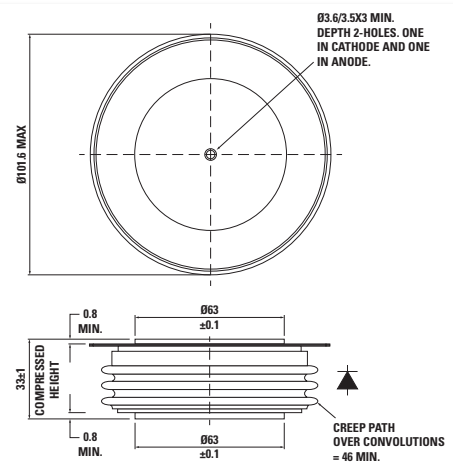


W7 - 100A293

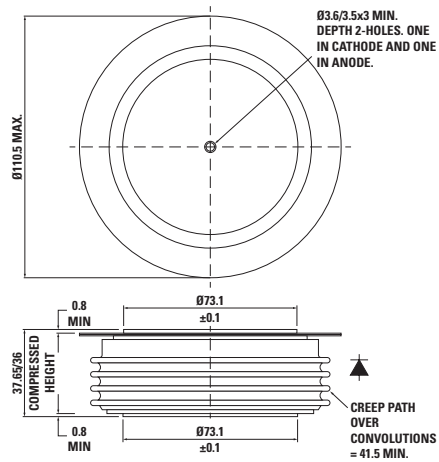


W8 - 101A212

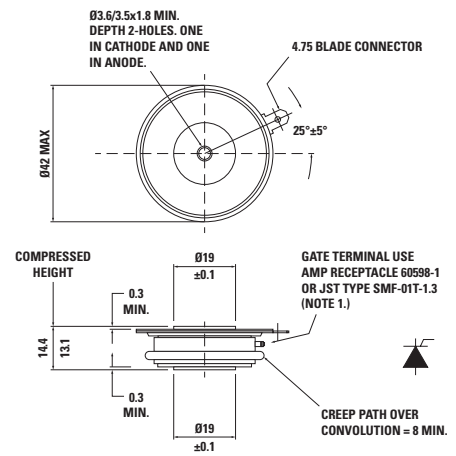


W10 - 101A216

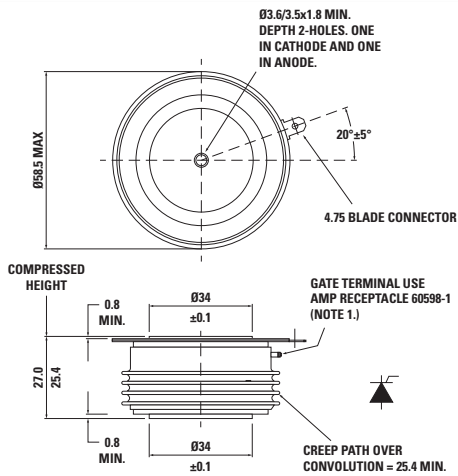


W11 - 101A223

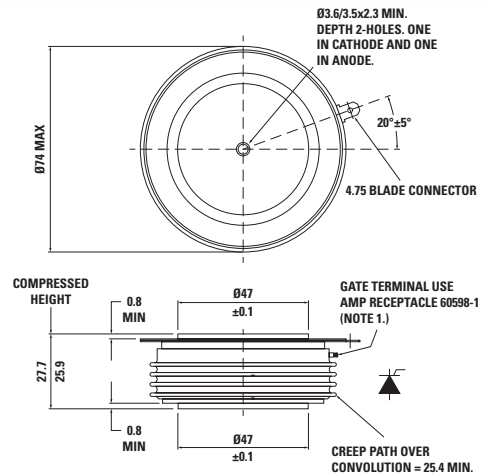


W12 - 101A232

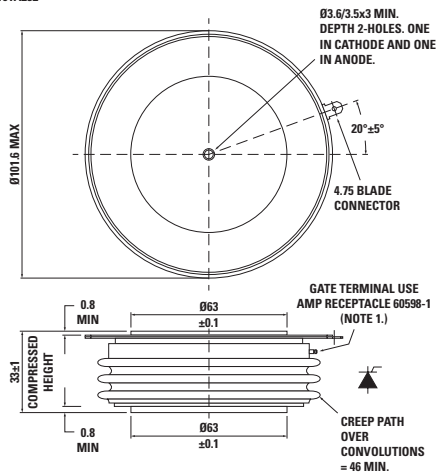


W13 - 101A281

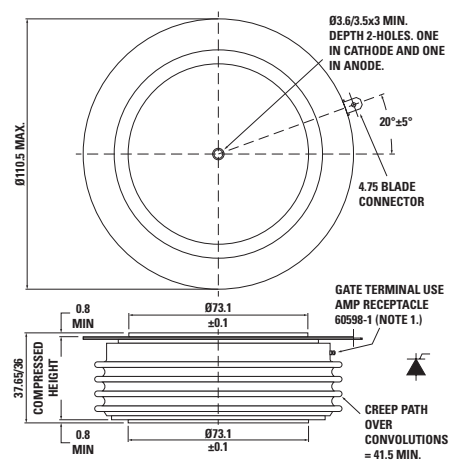


W16 - 101A235

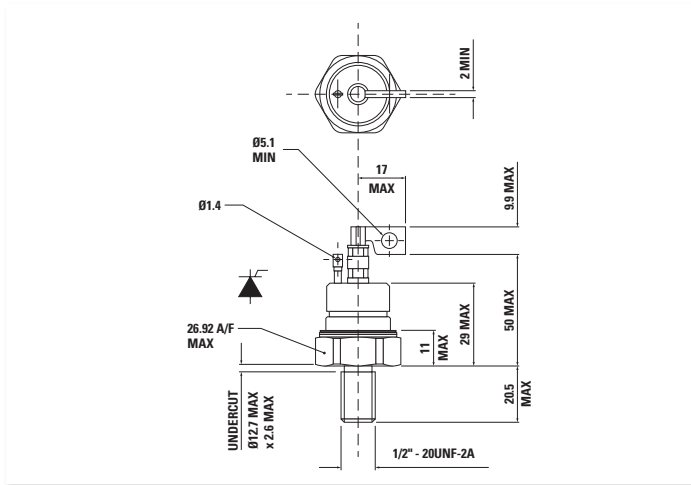


W17 - 101A231

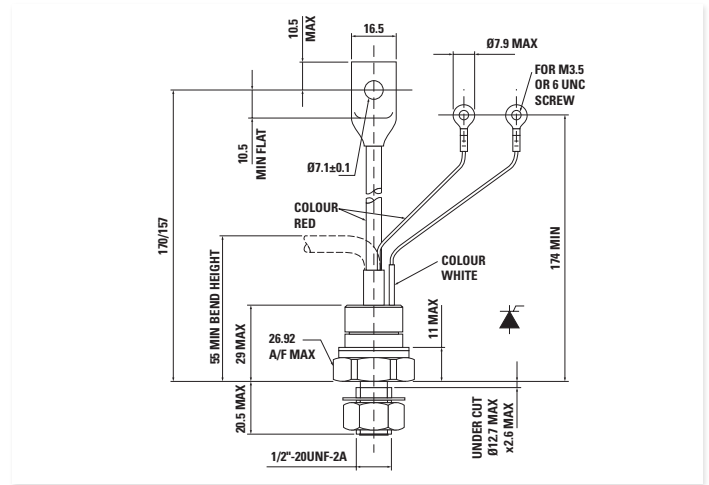


W18 - 101A225

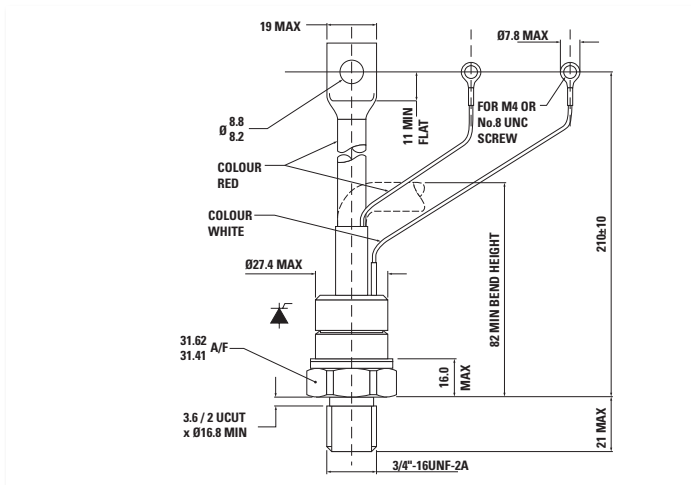


W20 - 100A303

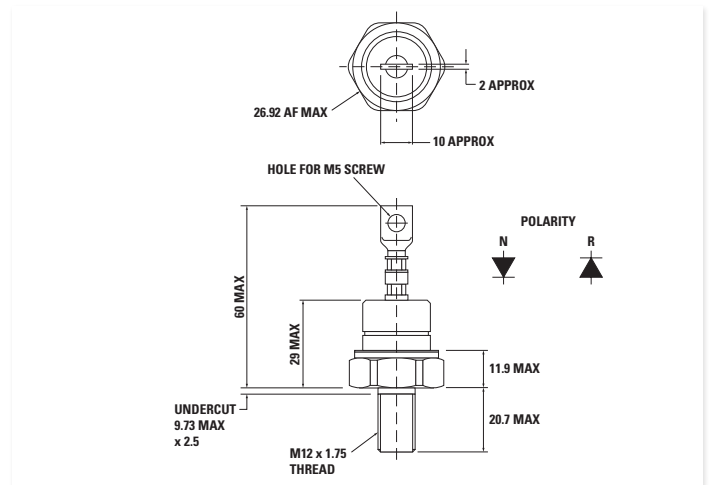


W21 - 100A294

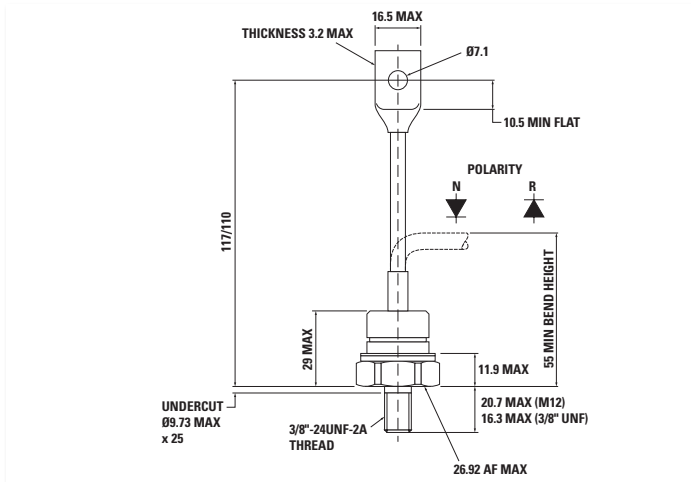


W22 - 100A297

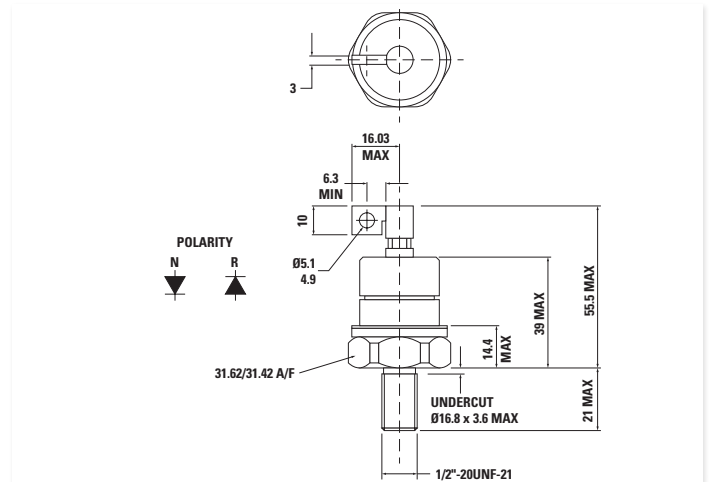


W23 - 100A281

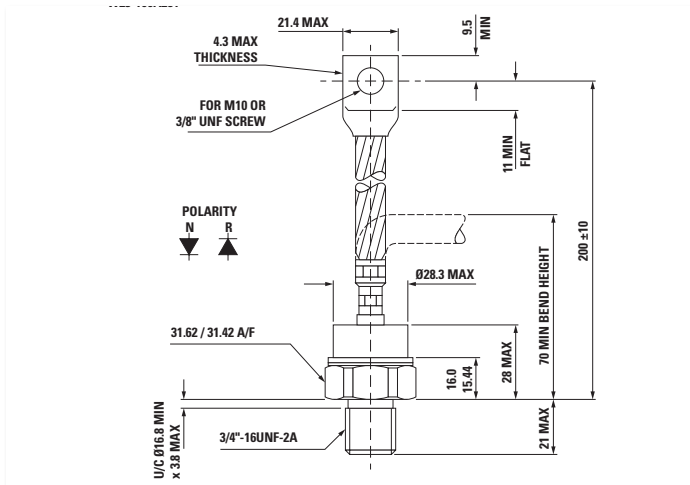


W24 - 100A280

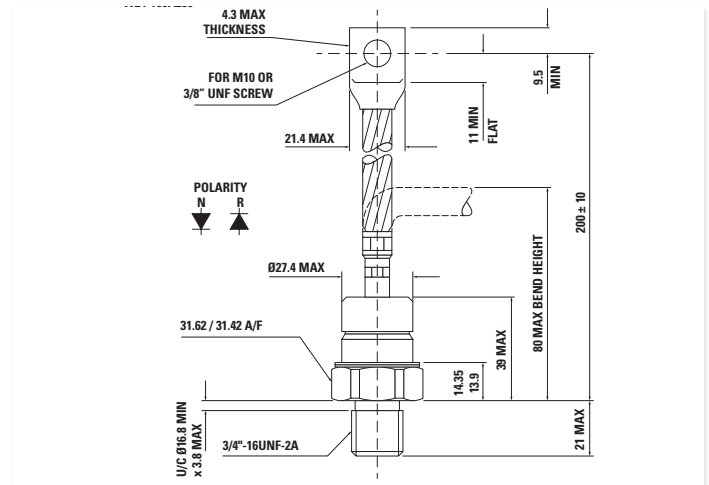


W33 - 101A346

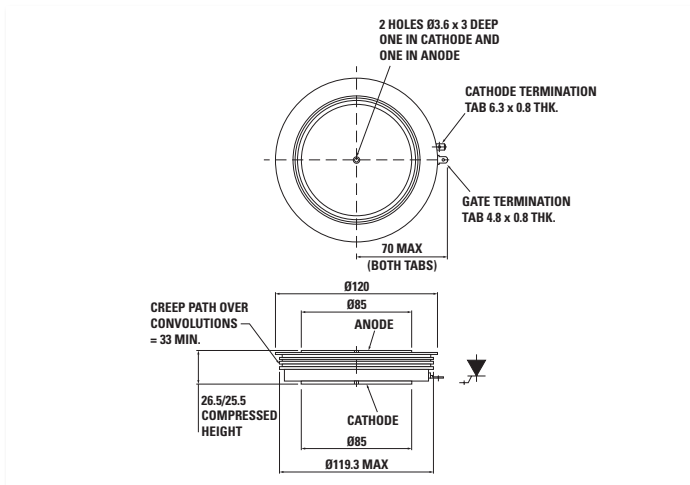


W37 - 100A325

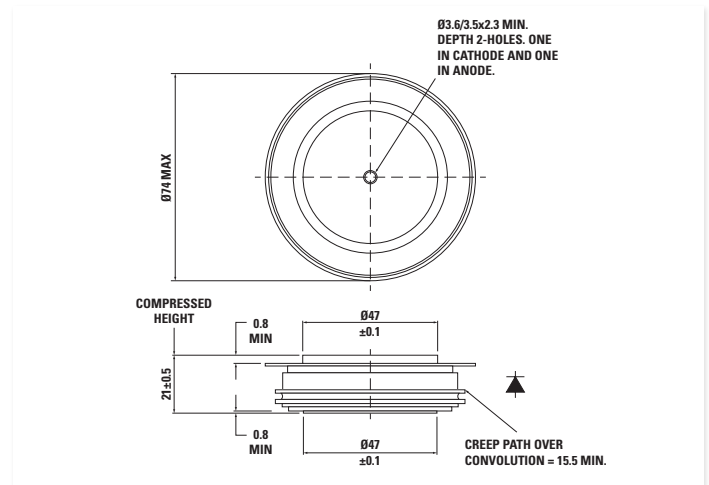


W39 - 100A338

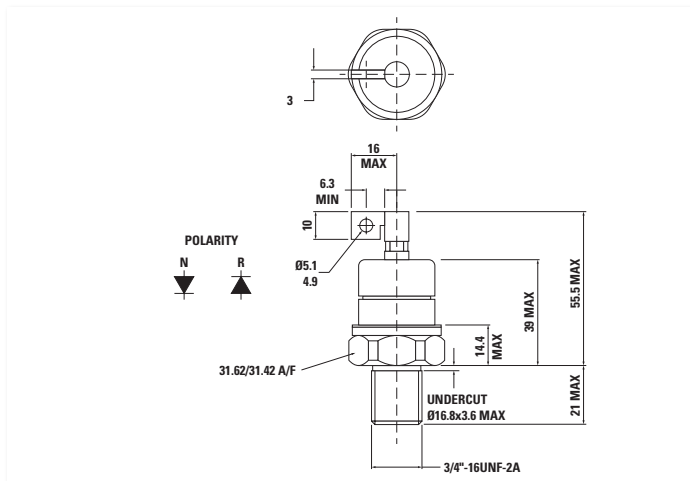


W40 - 171A107

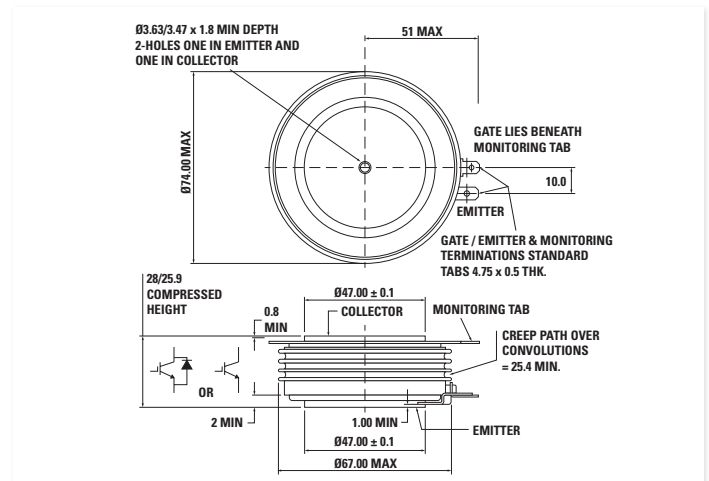


W41 - 171A108

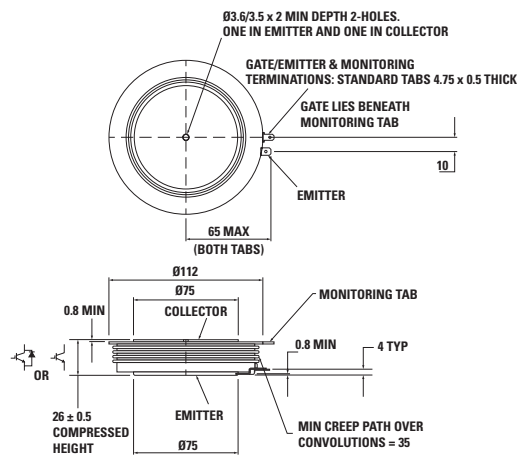


W42- 100A310

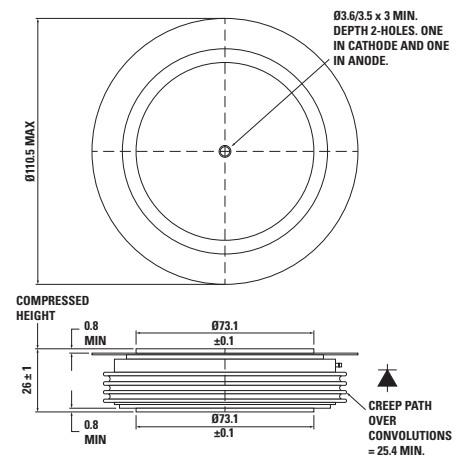


W43 - 100A320

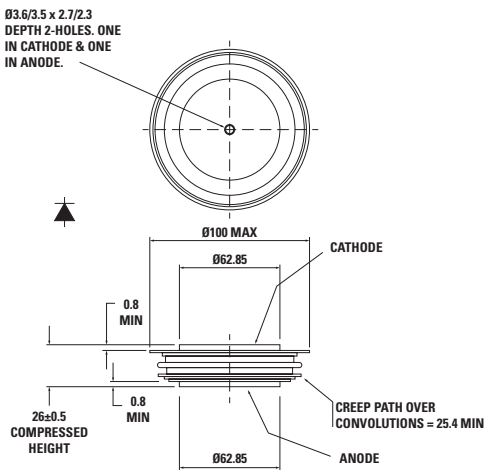


W44 - 101A340

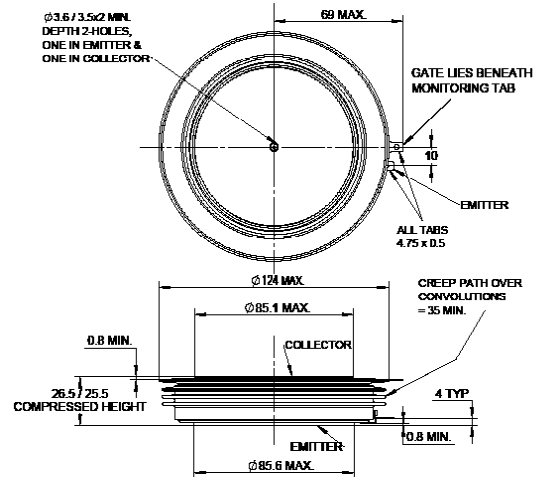


W45 - 101A359

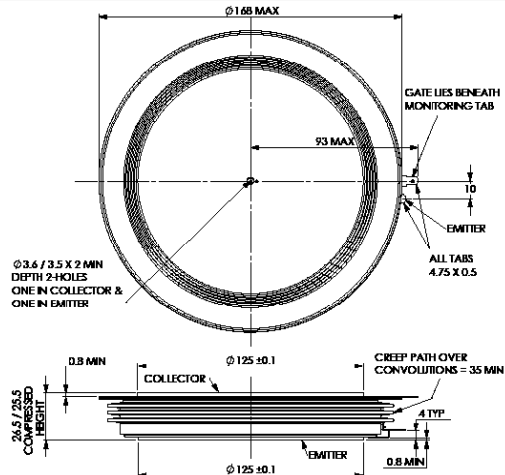


W46 - 101A305

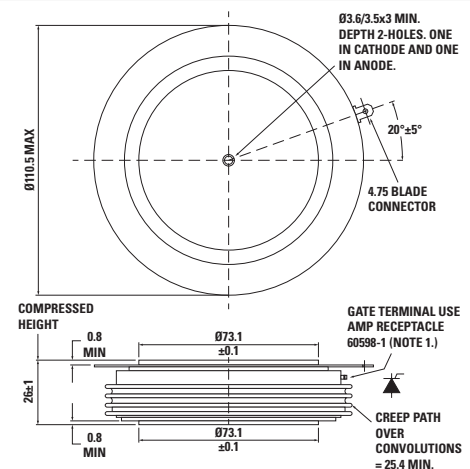


W47 - 100A322

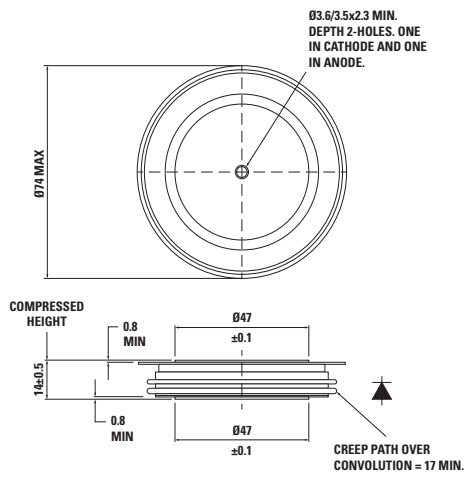


W48 - 101A347

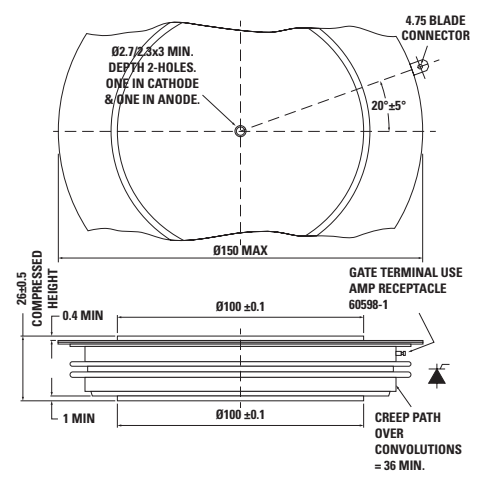


W51 - 101A334

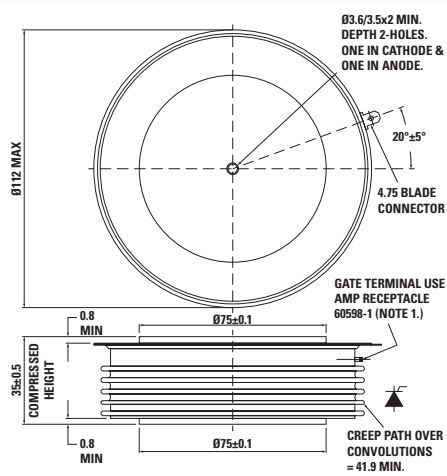


W52 - 100A328

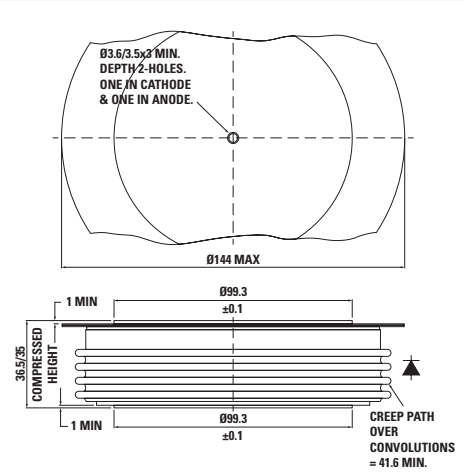


W54 - 100A353

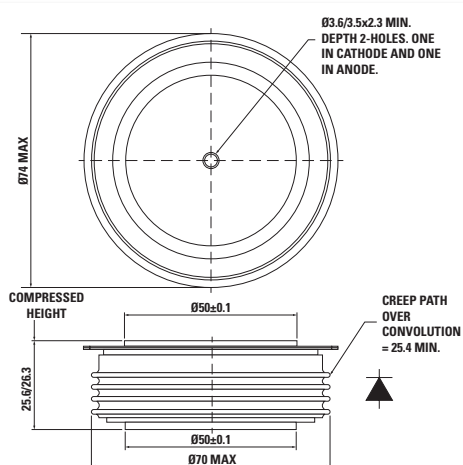


W55 - 101A352

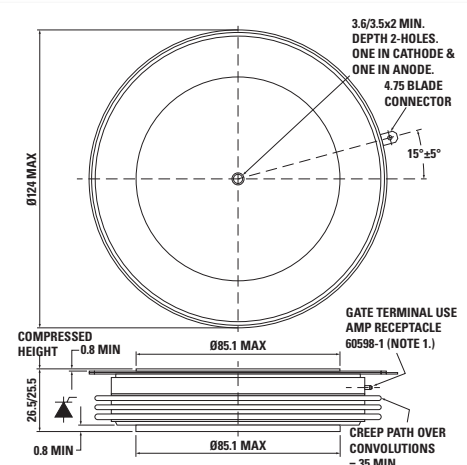


W56 - 101A365

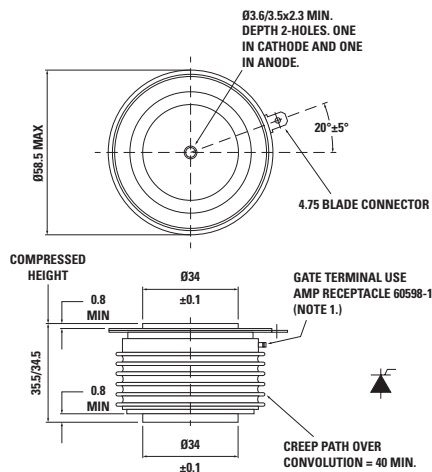


W57 - 101A363

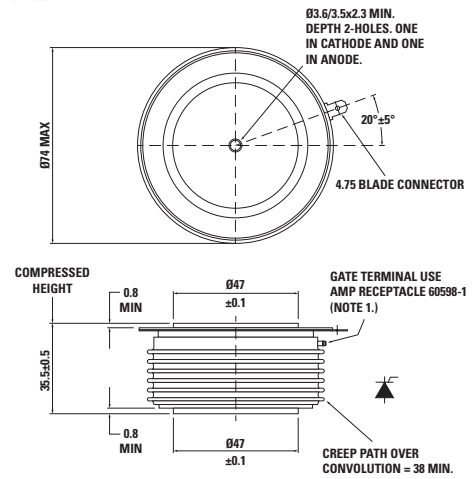


W58 - 101A237

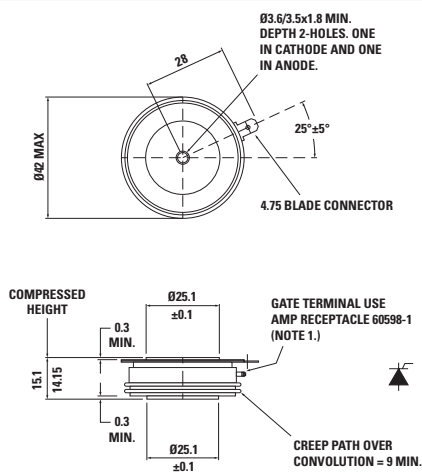


W59 - 100A359

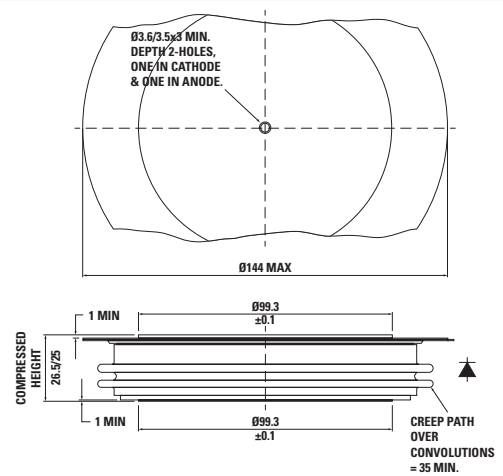


W62 - 101A314

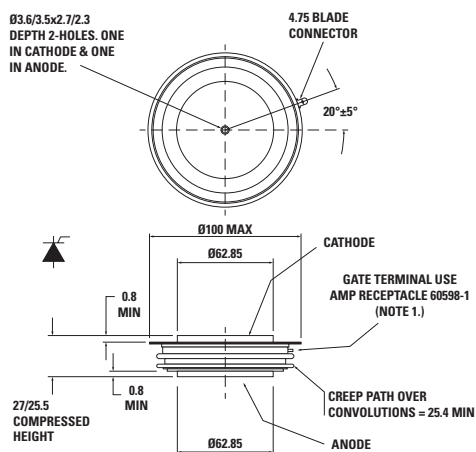


W67 - 101A366

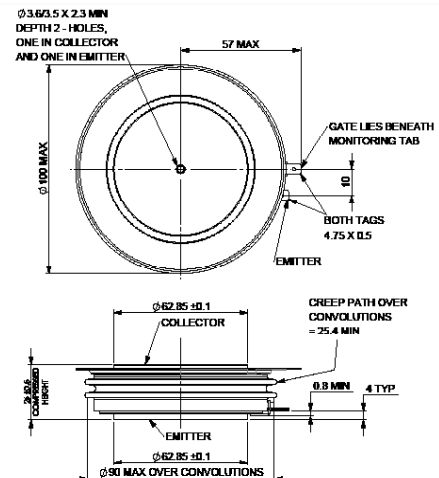


W68 - 100A367

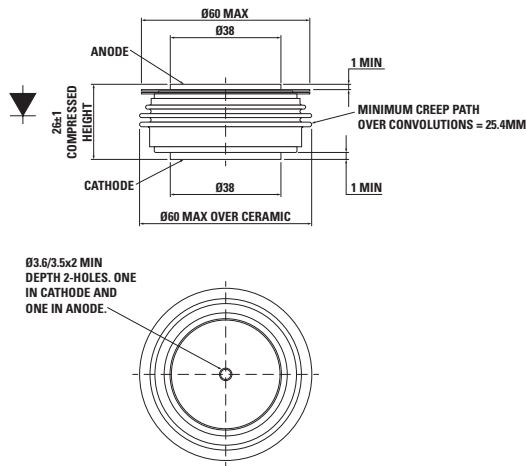


W70 - 101A357

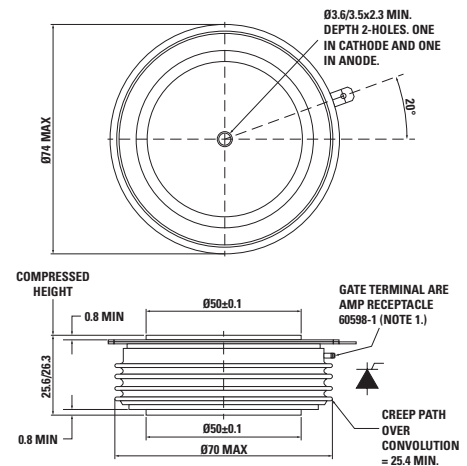


W71 - 101A375

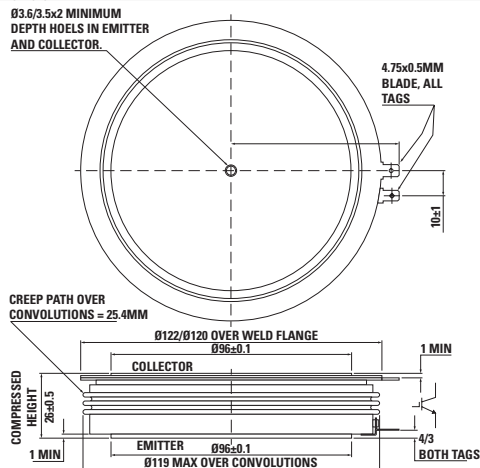


W75 - 101A377

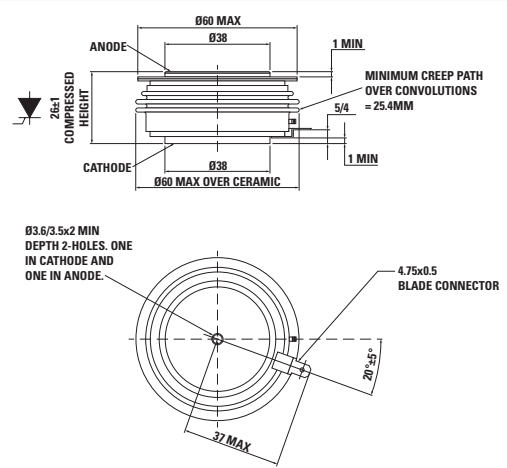


W76 - 101A392

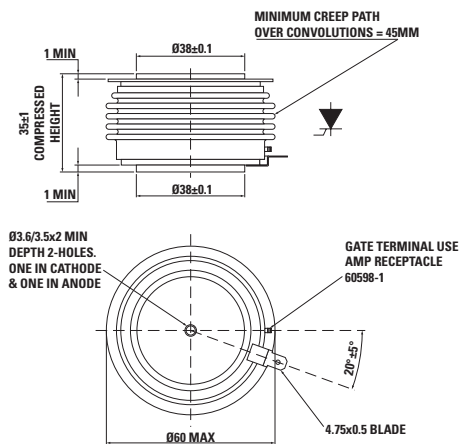


W77 - 101A372

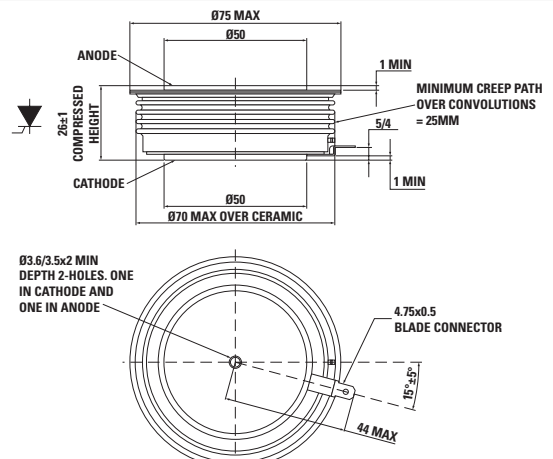


W78 - 101A393

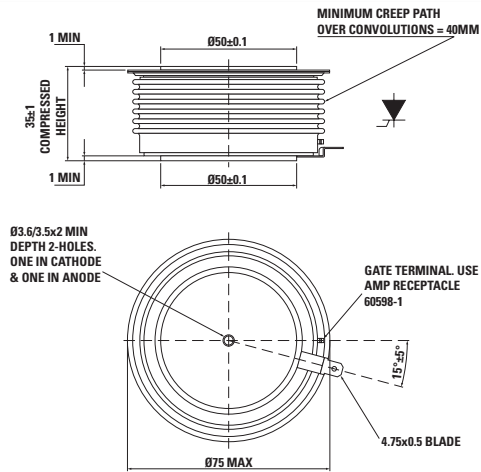


W79 - 101A391

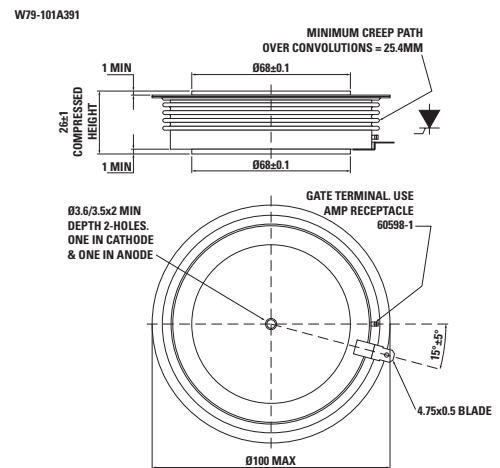


W80 - 101A394

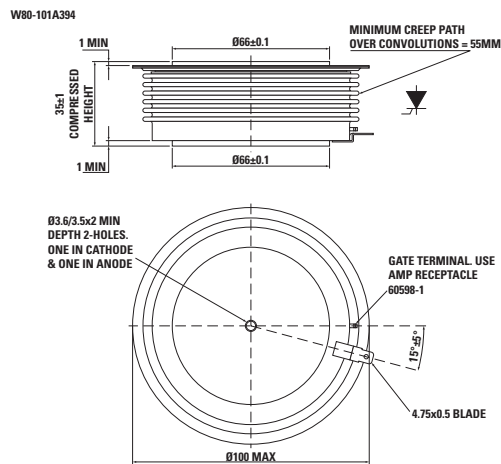


W81 - 101A373

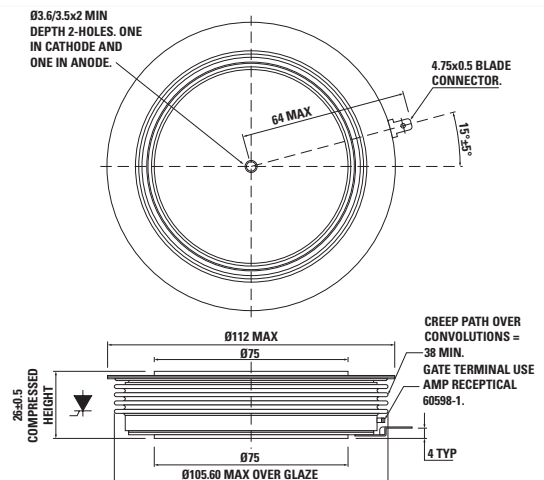


W82 - 101A395

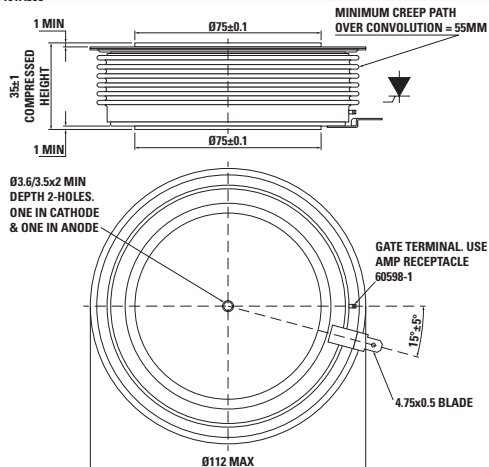


W89 - 100A368

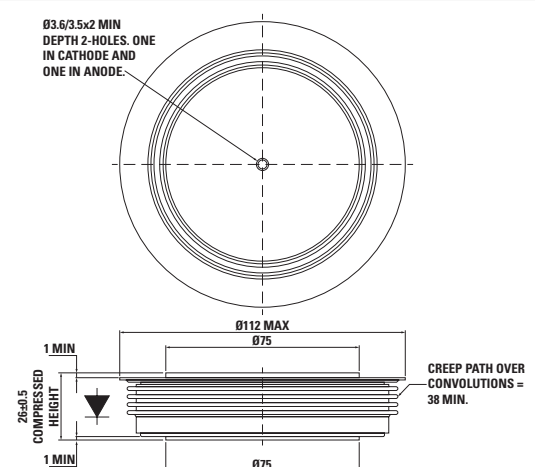


W94 - 100A372

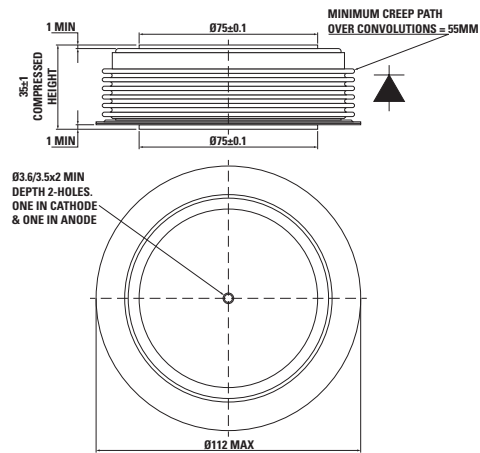


W95 - 101A403

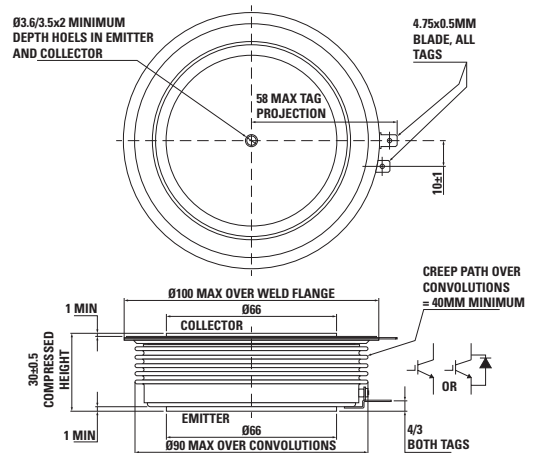


W96 - 101A409

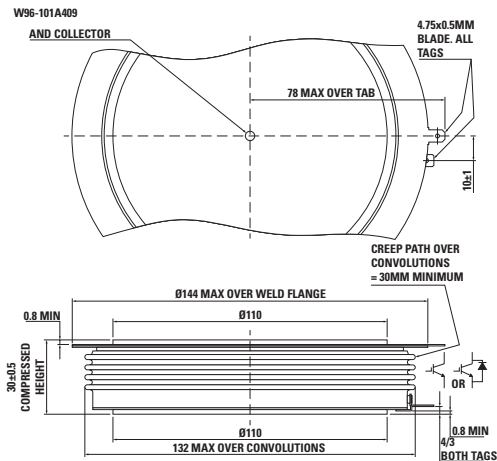


W97 - 100A379

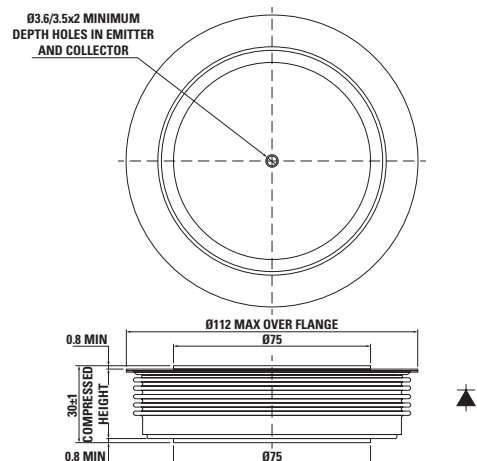


W98 - 101A413

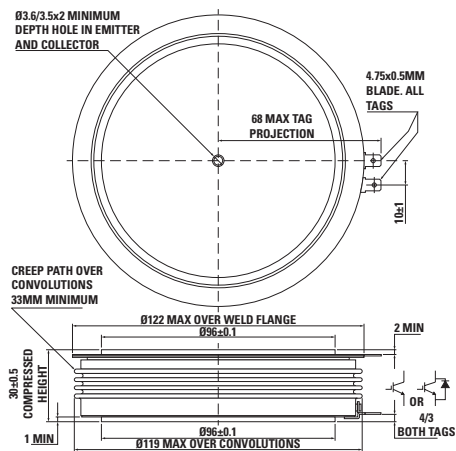


W99 - 100A383

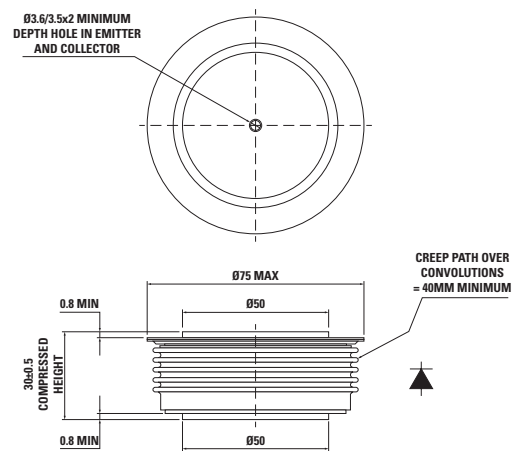


W100 - 100A384

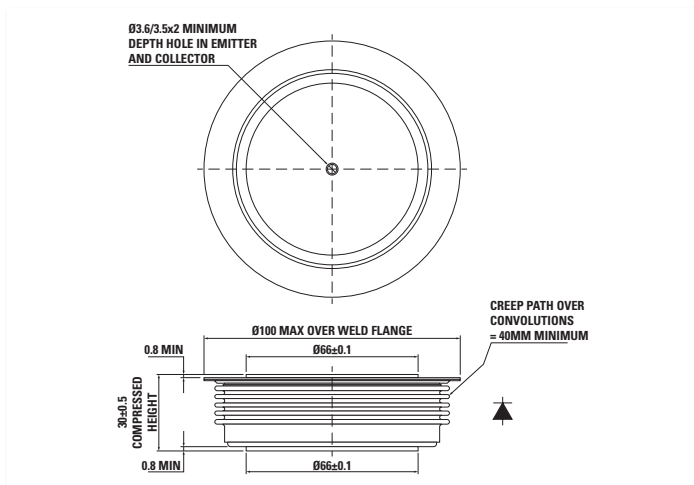


W101 - 100A380

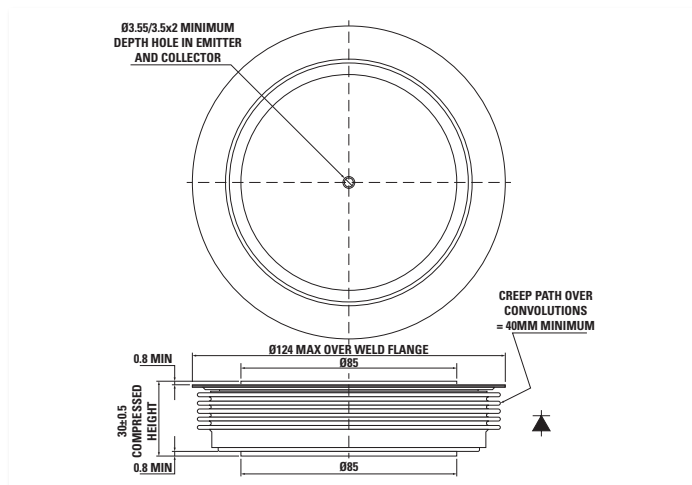


W103 - 101A401

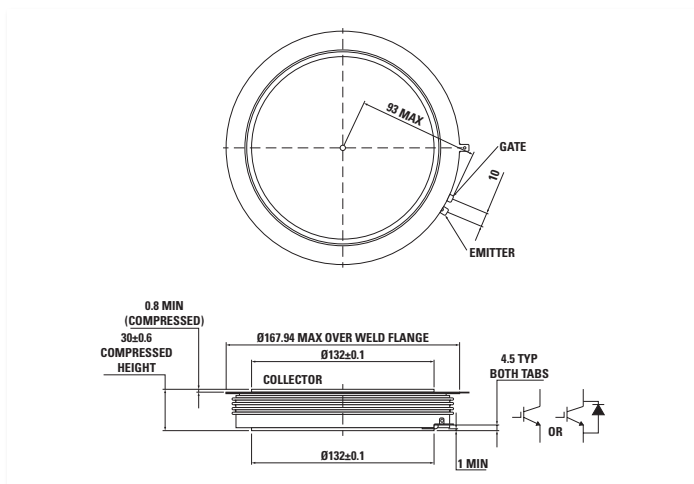


W105 - 100A385

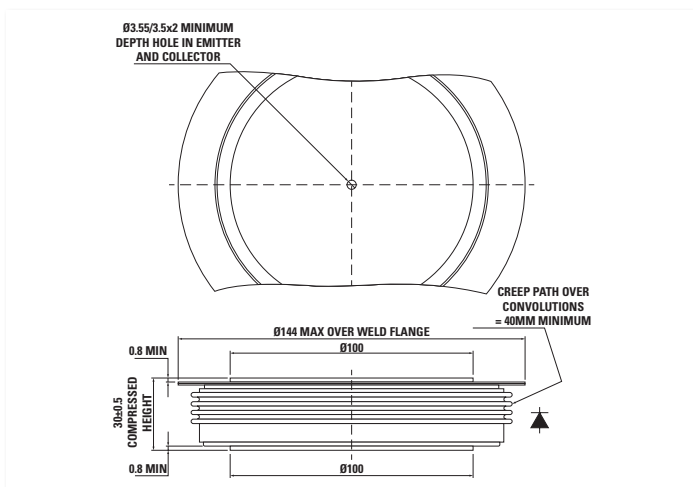


W106 - 101A420

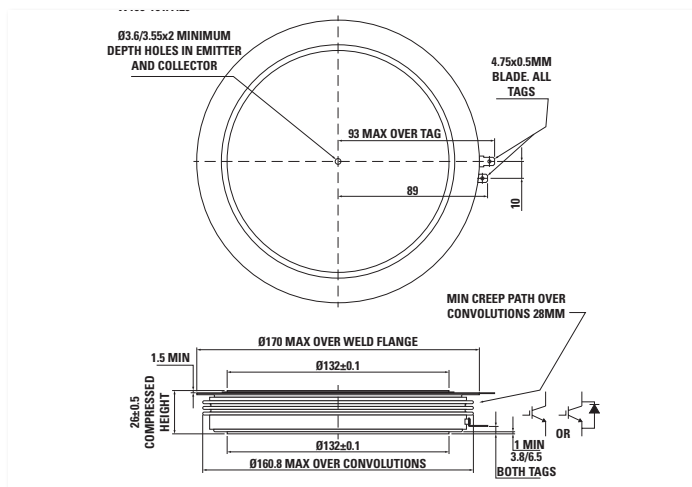


W107 - 101A411

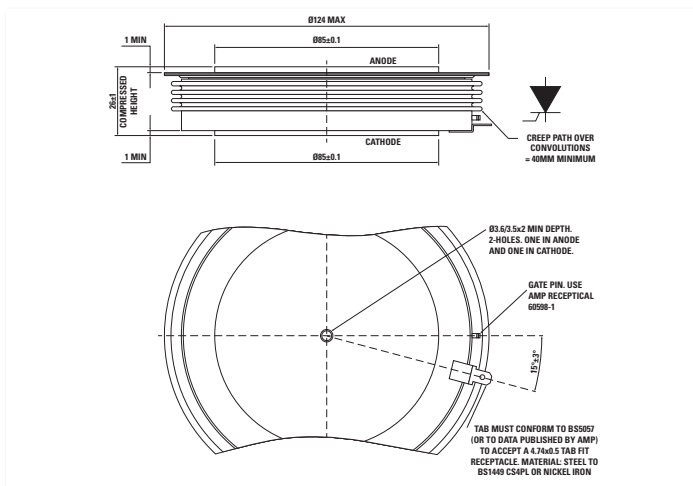


W108 - 101A410

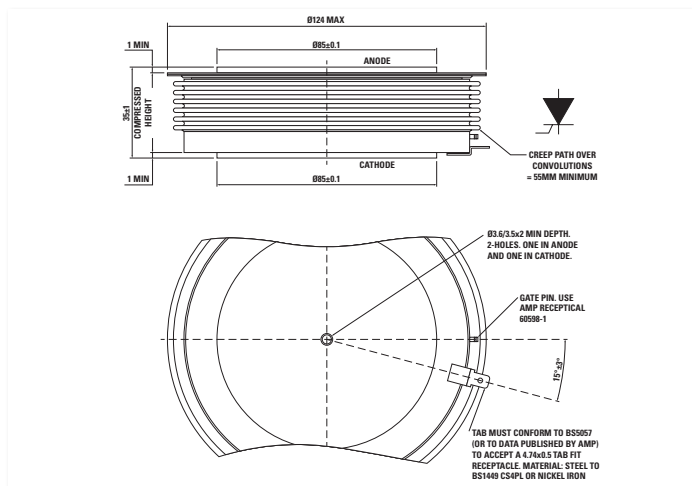


W109 - 101A425

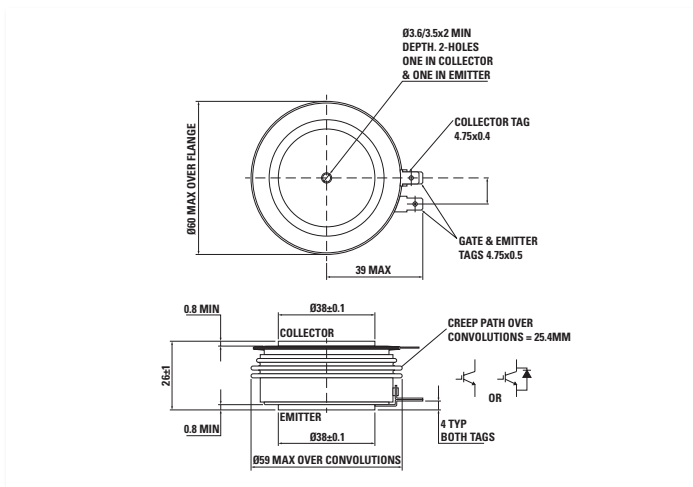


W110 - 101A418

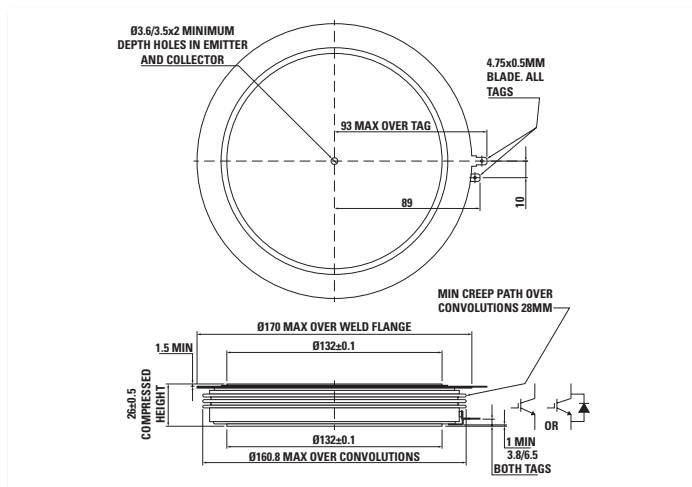


W111 - 100A378

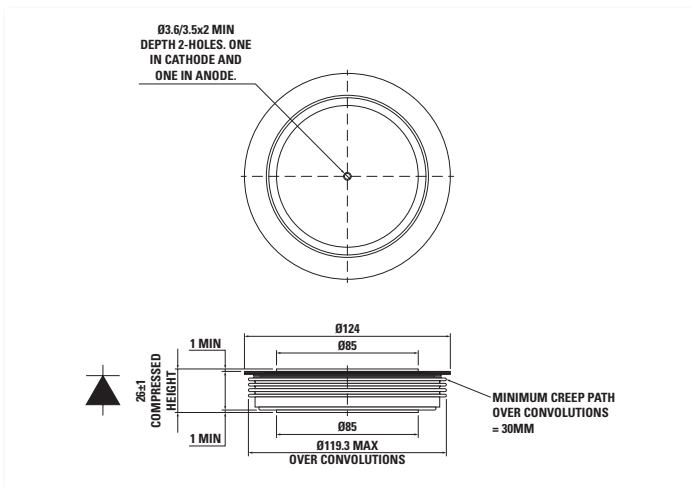


W112 - 100A377

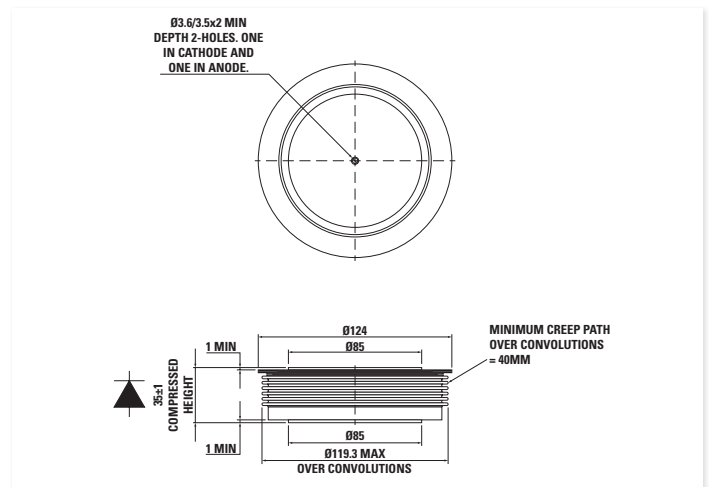


W113 - 100A393

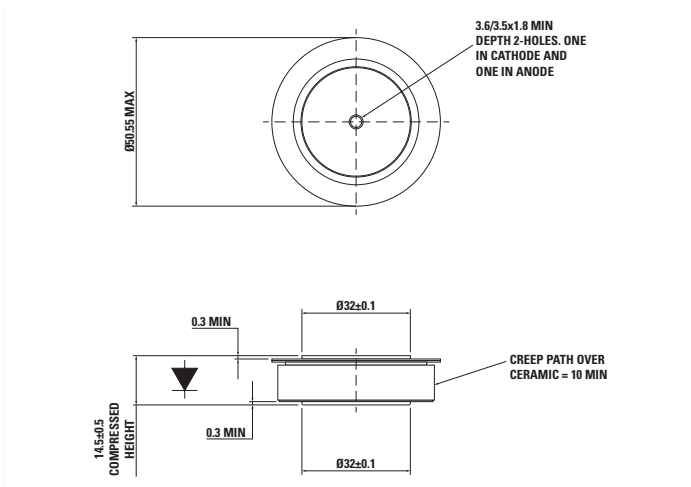


W114 - 100A394

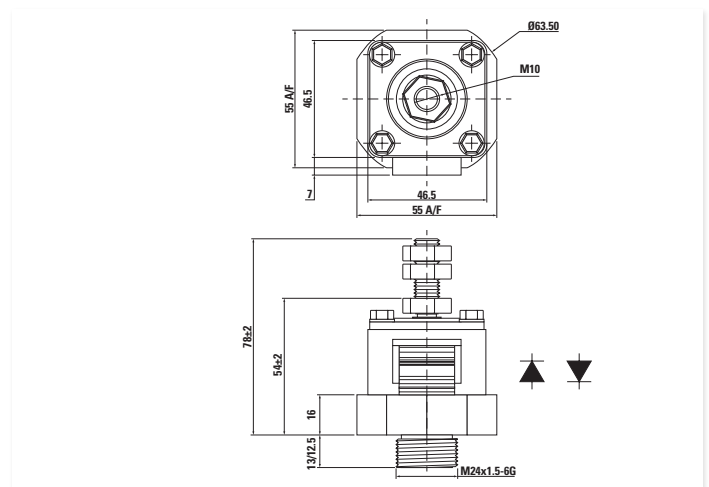


W115 - 101A427

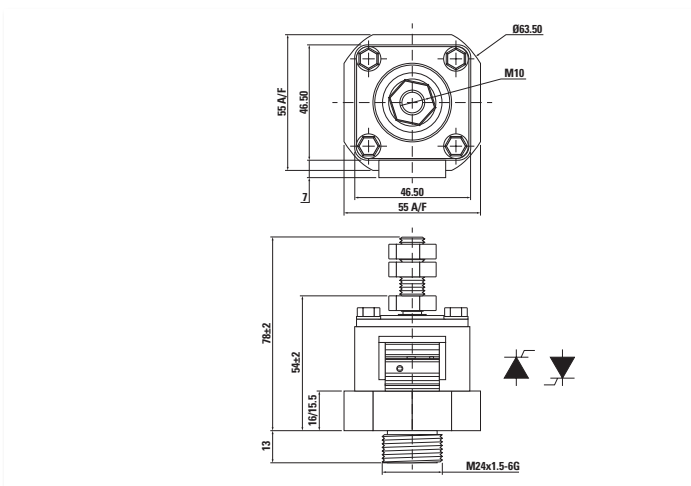


W116 - 150A132

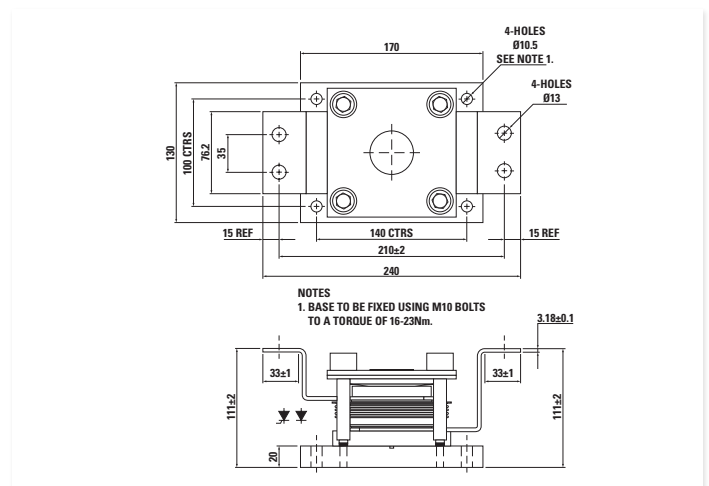


W117 - 100A375

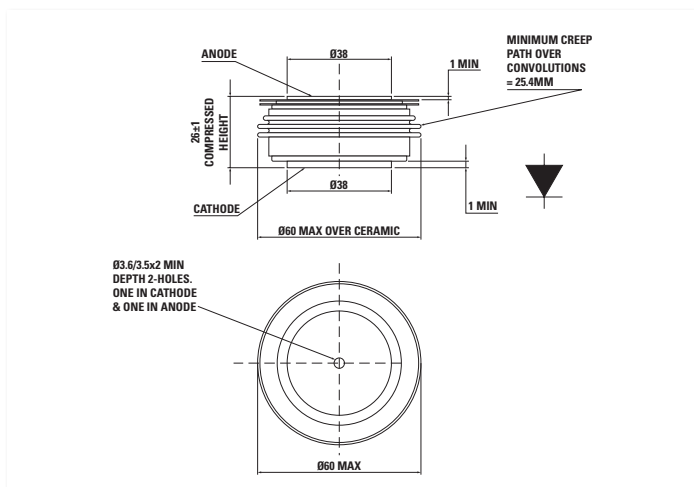


W118 - 101A428

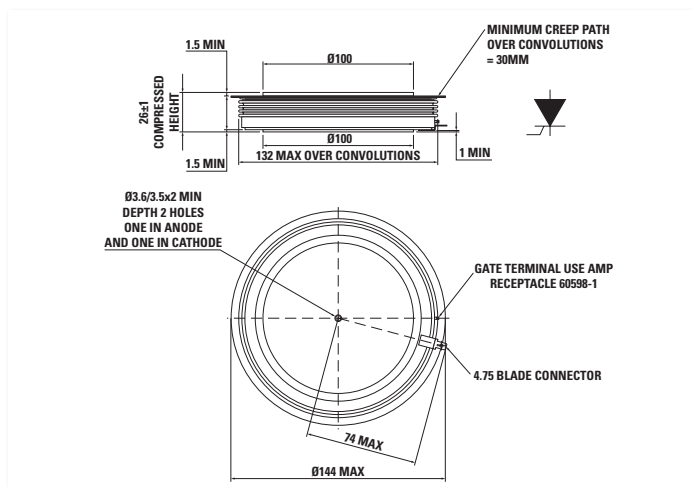


W119 - 101A421

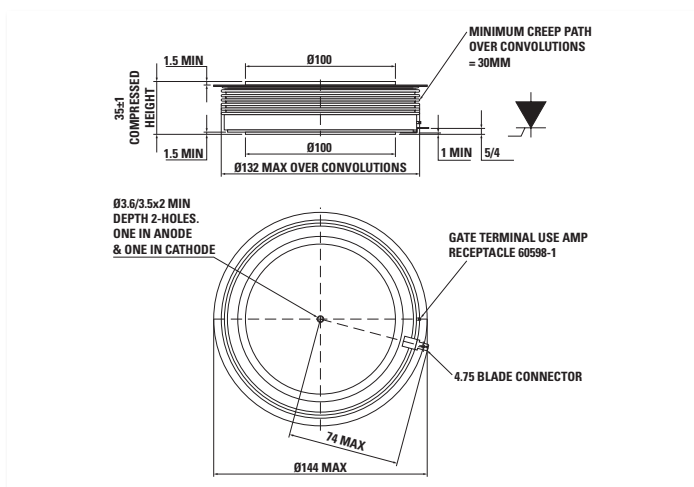


W120 - 100A395

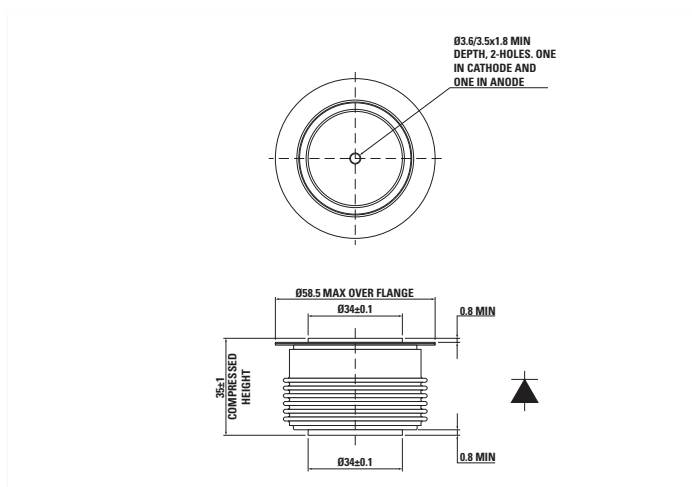


W121 - 100A381

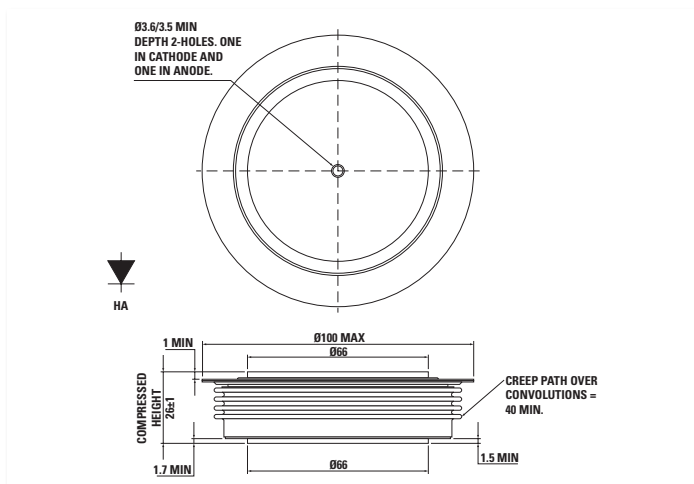


W122 - 100A396

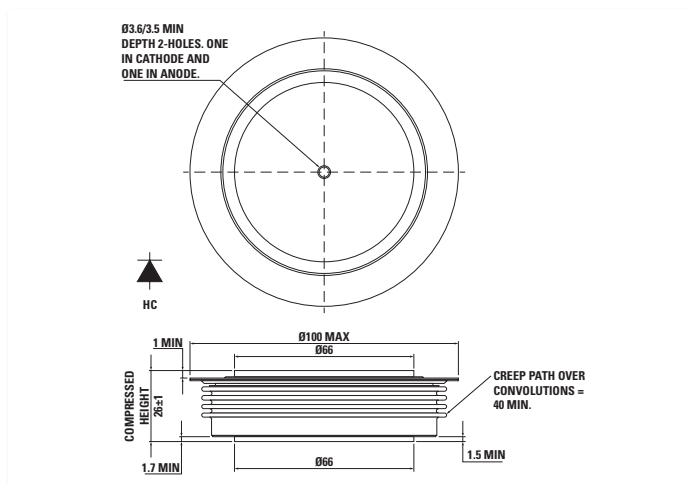


W123 - 100A382

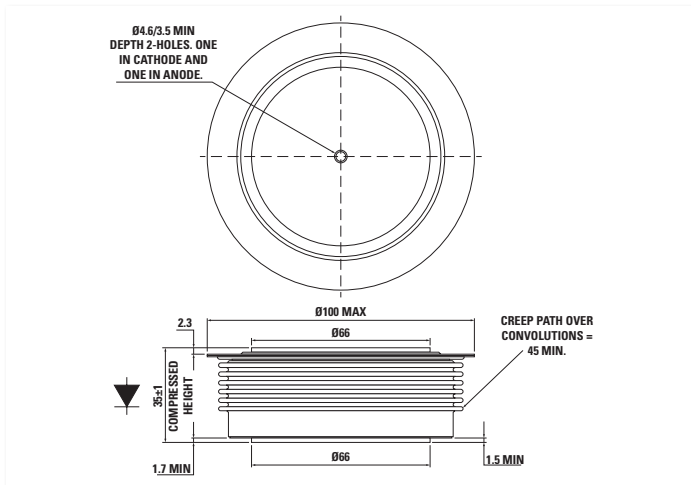


W124 - 100A397

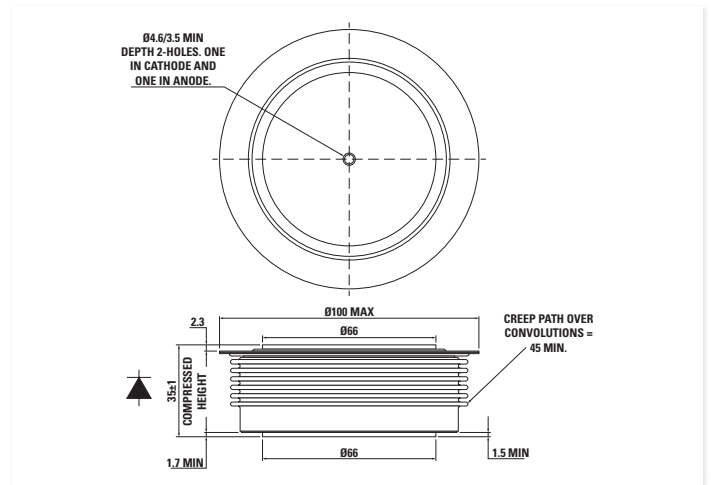


W126 - 100A368

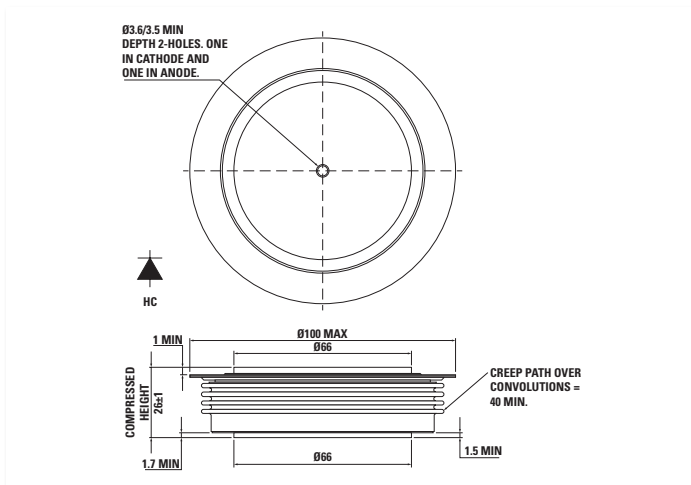


W127 - 100A368

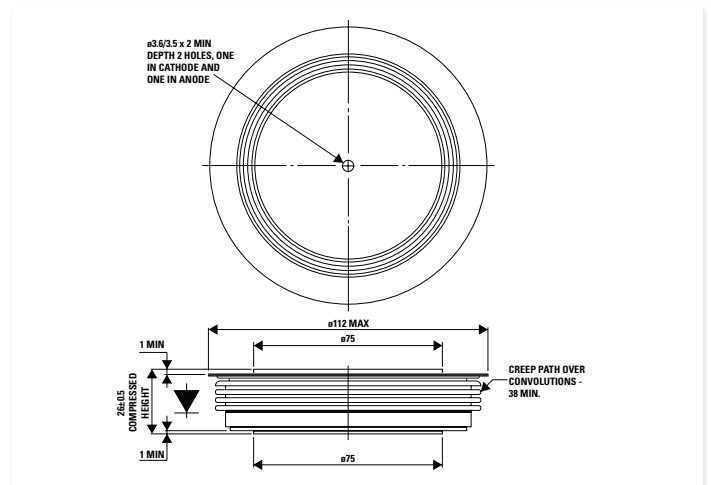


WD2 - 100A325

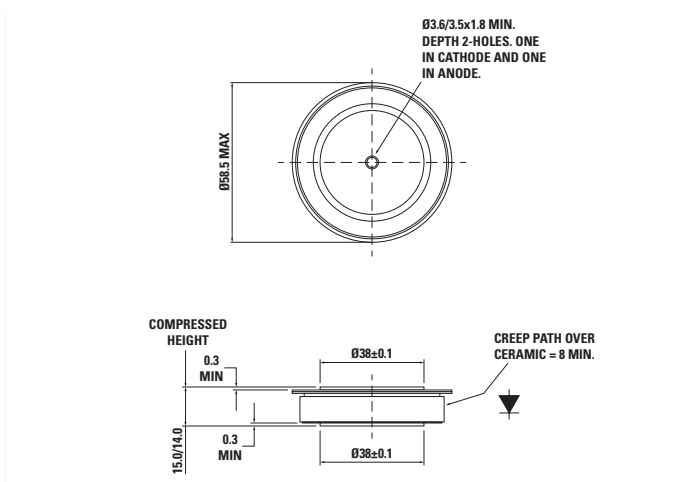


WD3 - 100A356

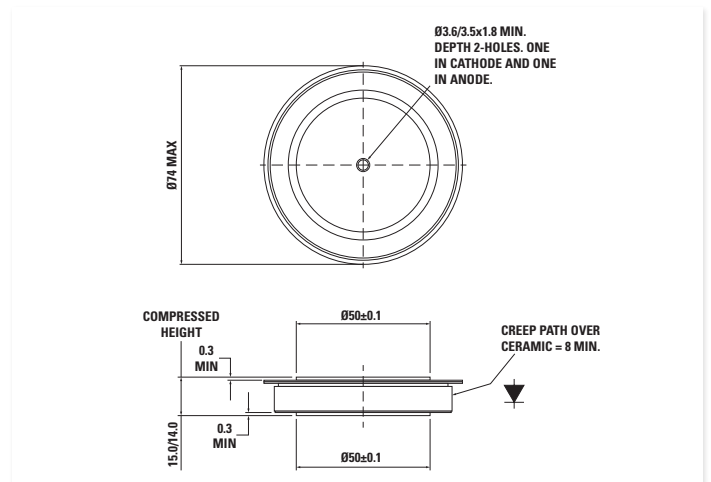


WD5 - 100A361 - 26 mm thick

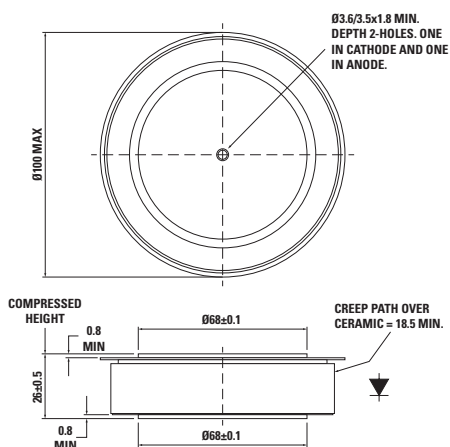


WD6 - 100A360 - 33 mm thick

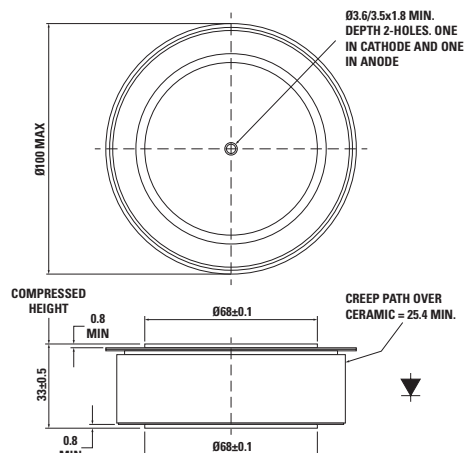


WD7 - 100A363

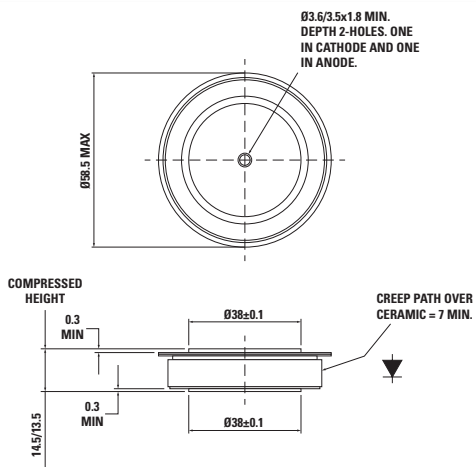


WD8 - 100A392

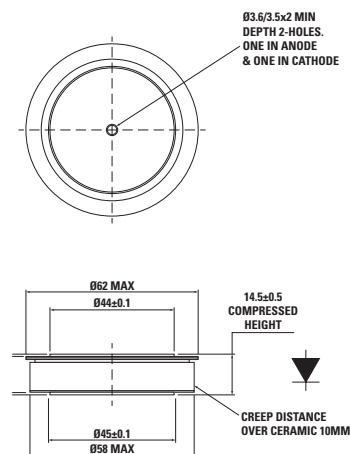


WP1 - 101A361

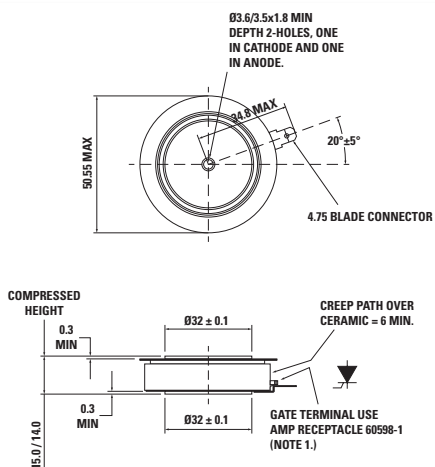


WP2 - 101A354

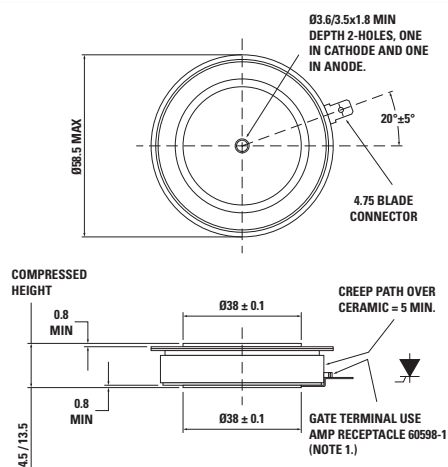


WP3 - 101A353

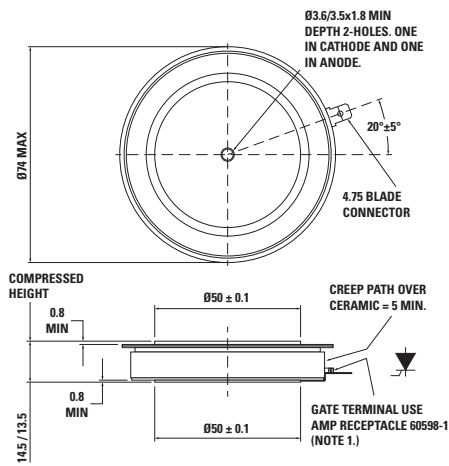


WP4 - 101A355

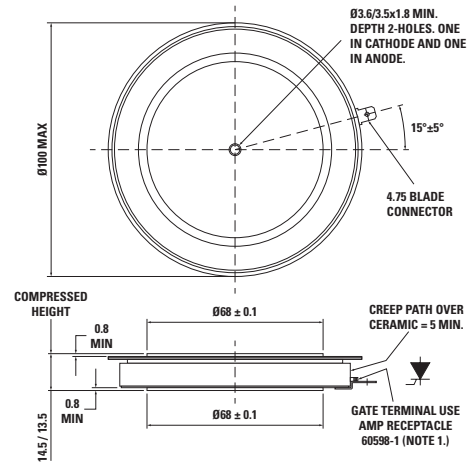


WP5 - 101A356

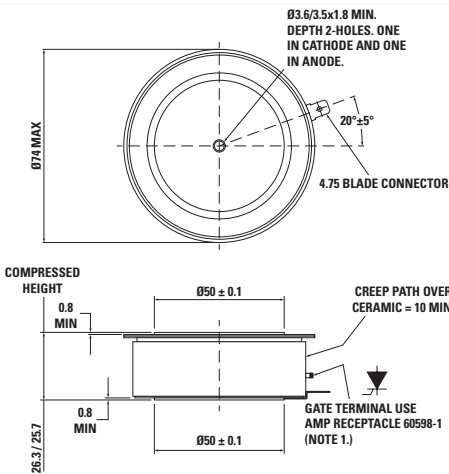


WP6 - 101A389

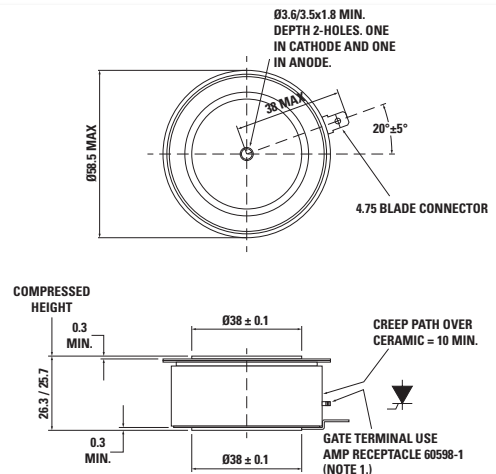


WC1 - XK0450SA056M

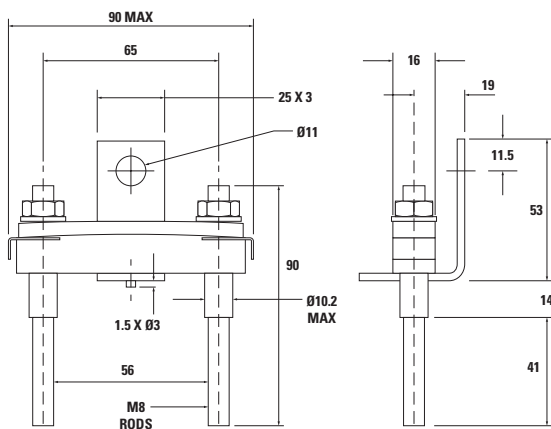


WC2 - XK0450DA056M

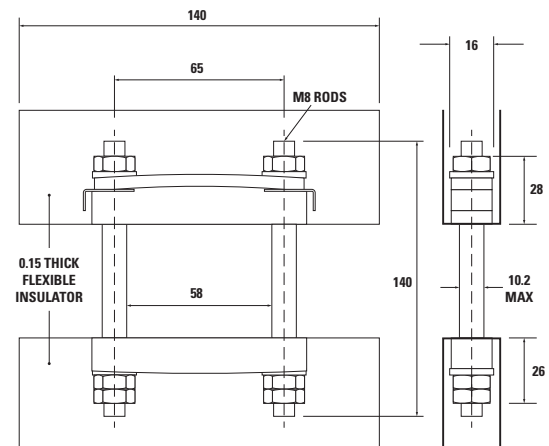


WC3 - XK0450DT056M

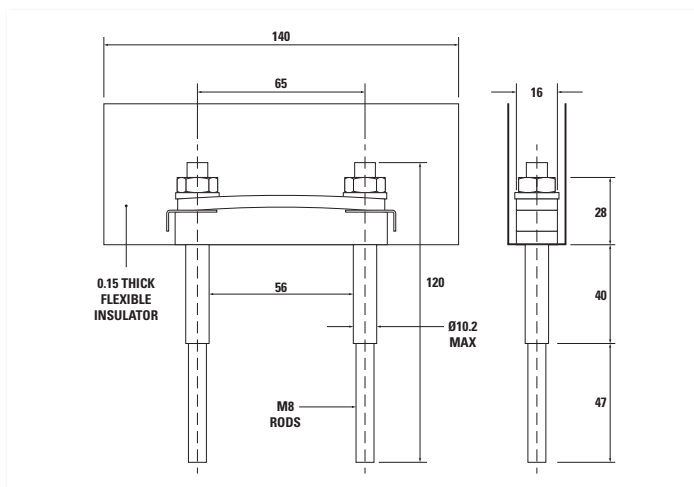


WC4 - XK0550SA056M

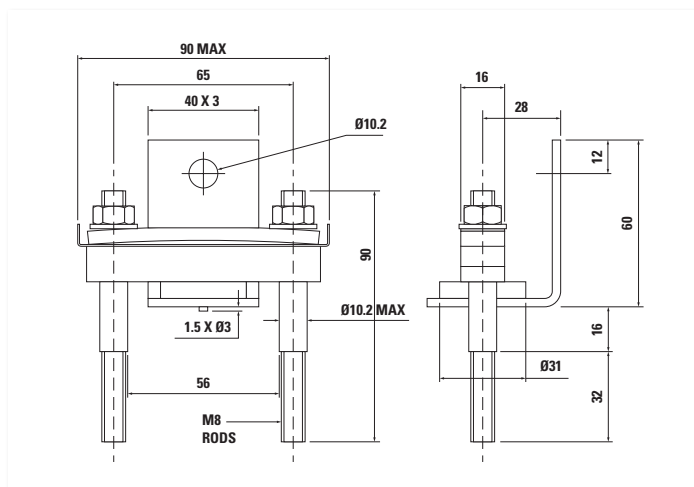


WC5 - XK0550DA056M

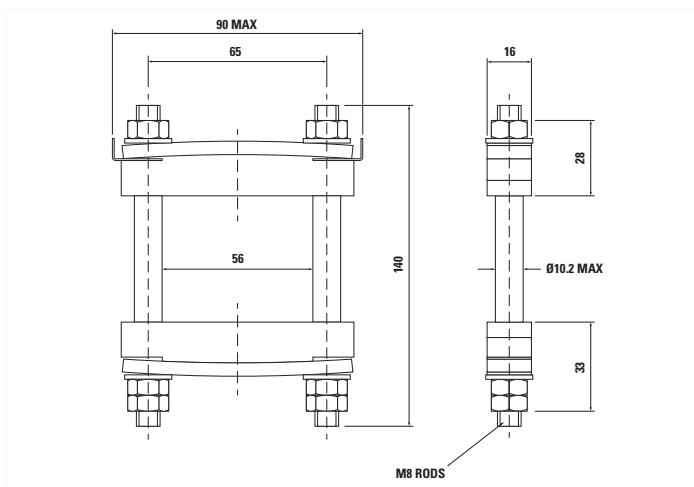


WC6 - XK0900SA056M

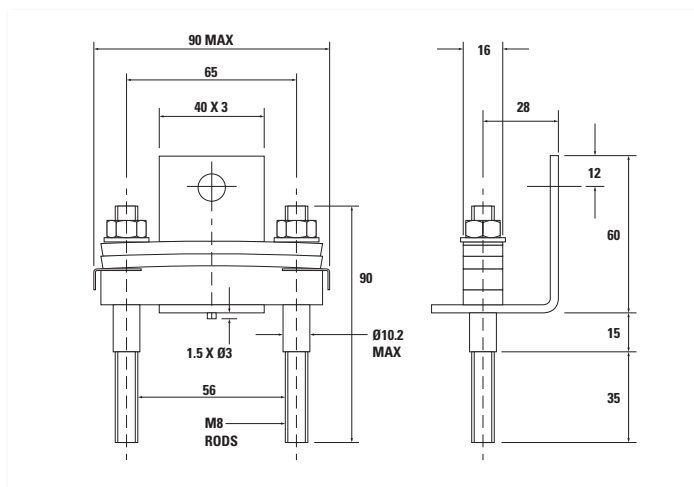


WC7 - XK0900DA056M

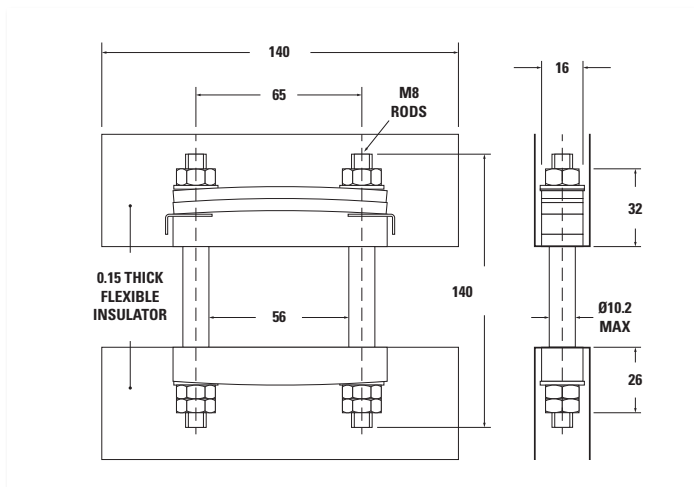


WC8 - XK0900DT056M

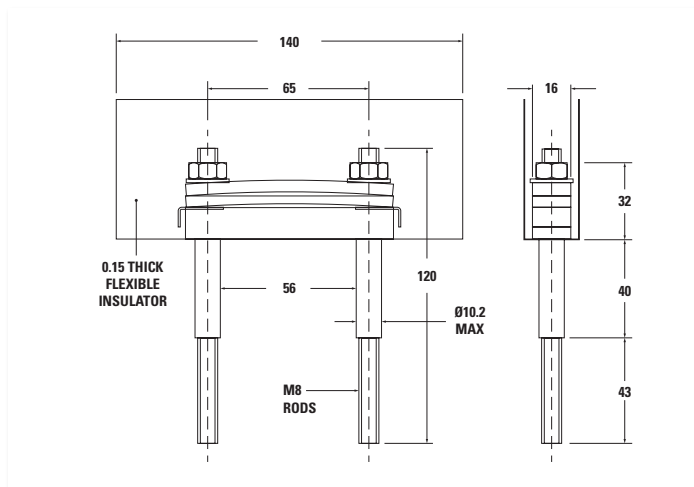


WC9 - XK0600SA074M

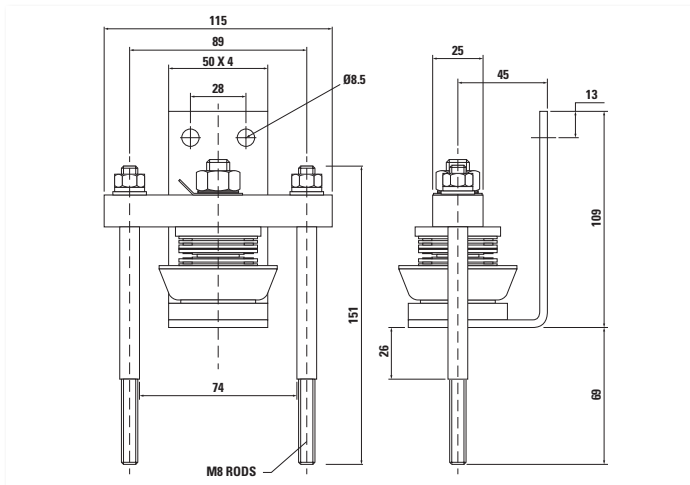


WC12 - XK1000DA074M

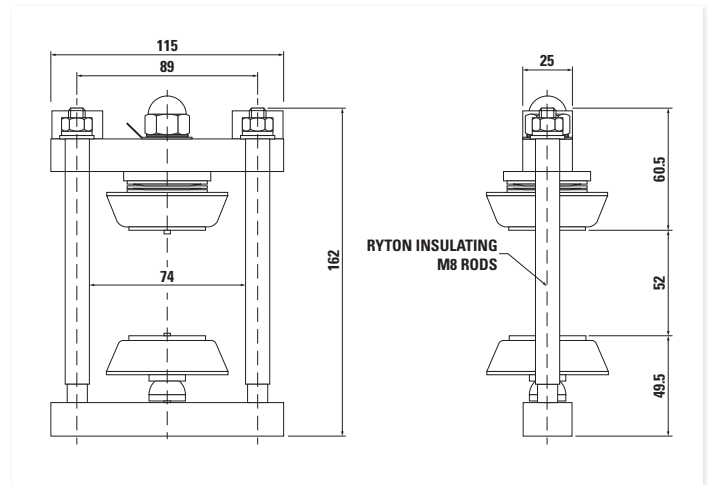


WC10 - XK0600DA074M

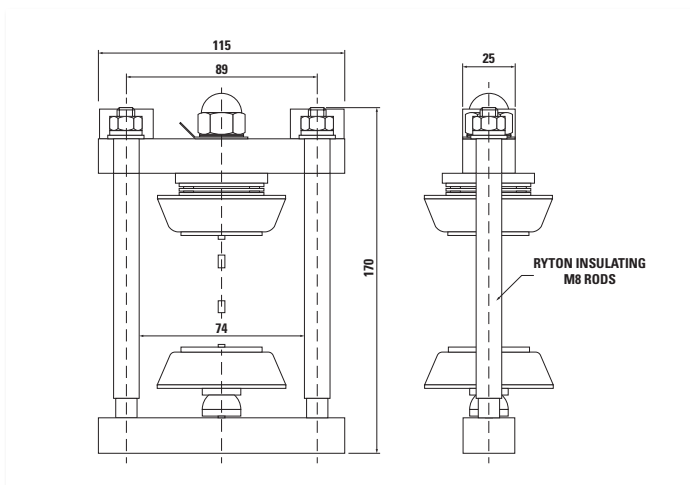


WC13 - XK1100DA076M

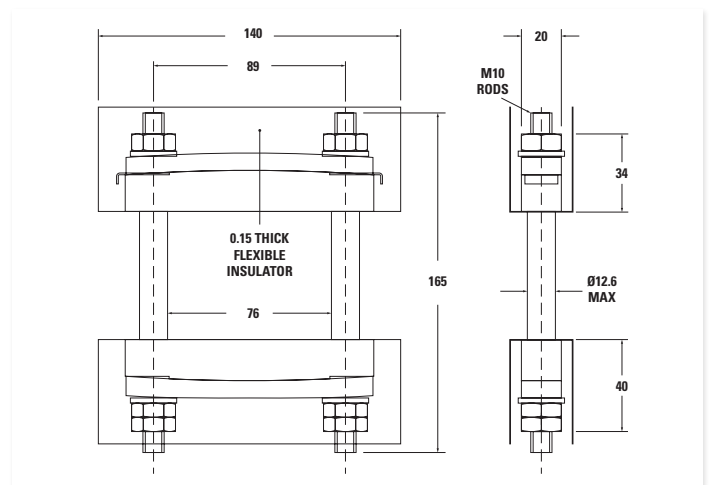


WC11 - XK1000SA074M

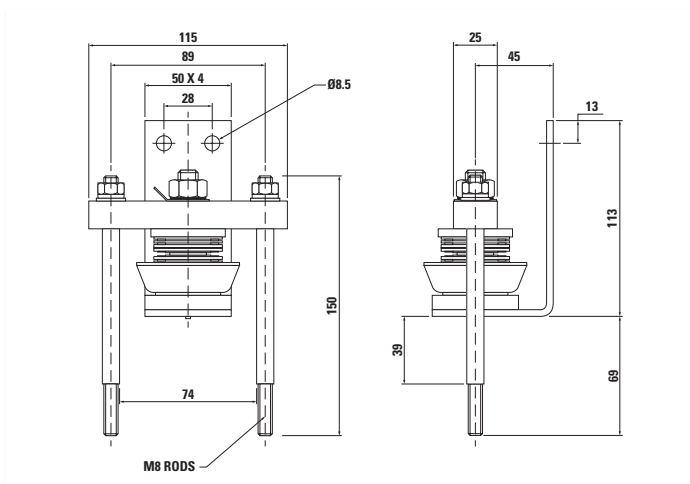


WC14 - XK1130SA076M

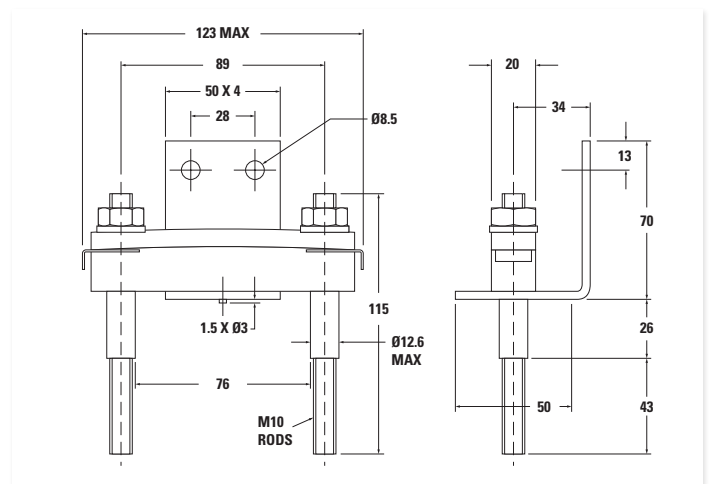


WC15 - XK1130DA076M

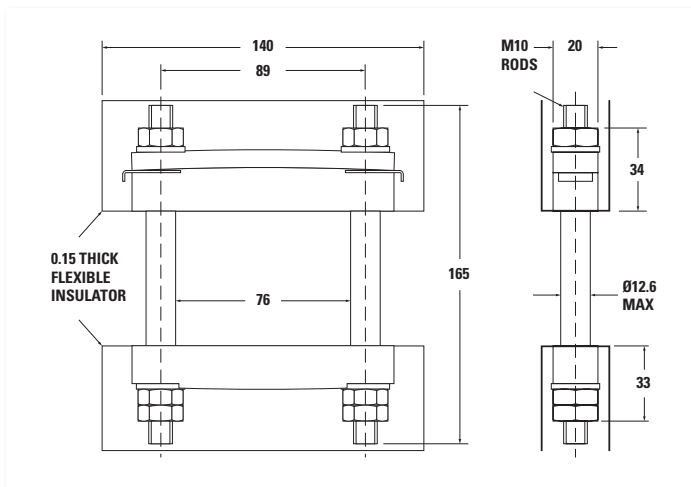


WC16 - XK1130DT076M

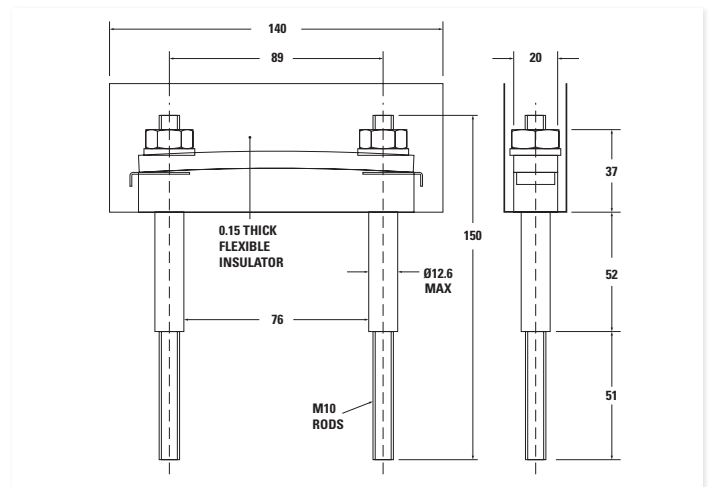


WC17 - XK1800SA076M

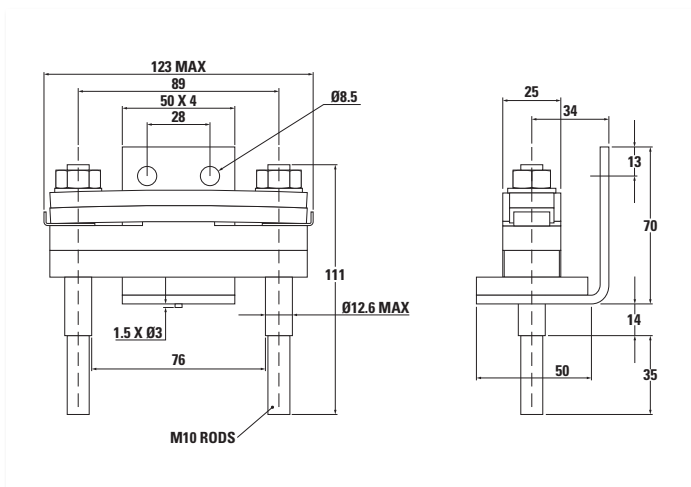


WC18 - XK1800DA076M

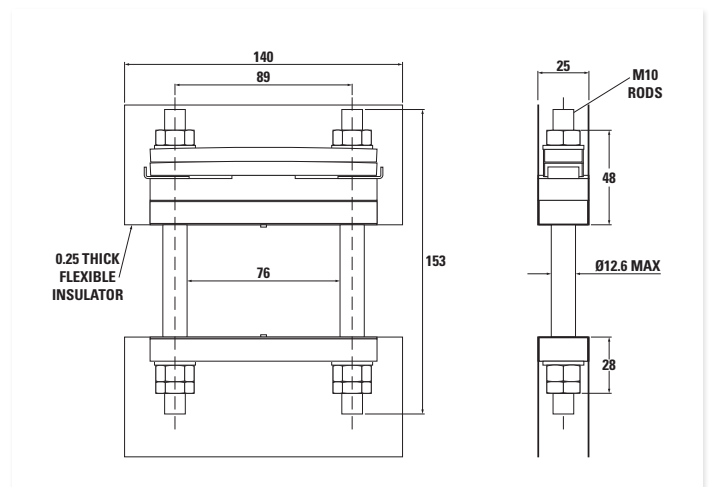


WC19 - XK1800DT076M

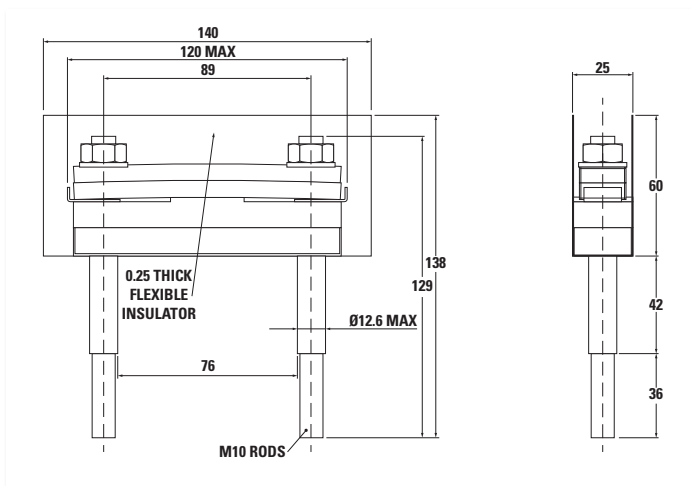


WC20 - XK2100SA076M/ML

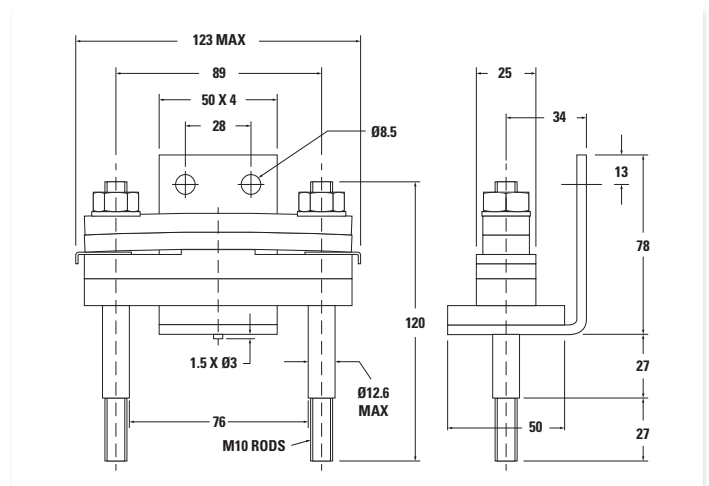


WC21 - XK2100DA076M/ML

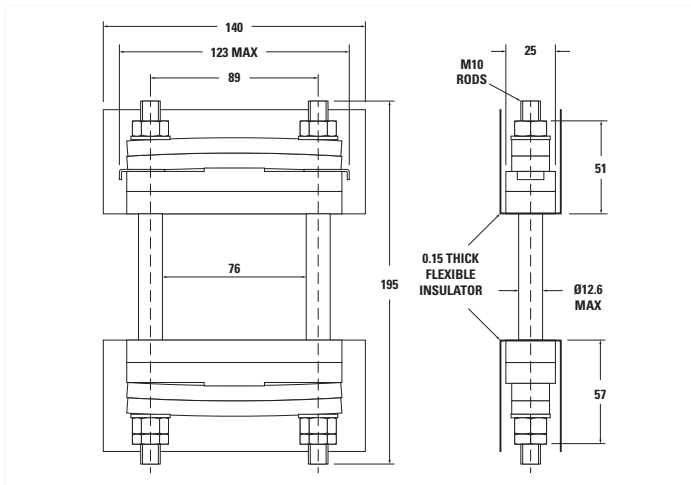


FPO WC22 - XK2140SA076M/ML

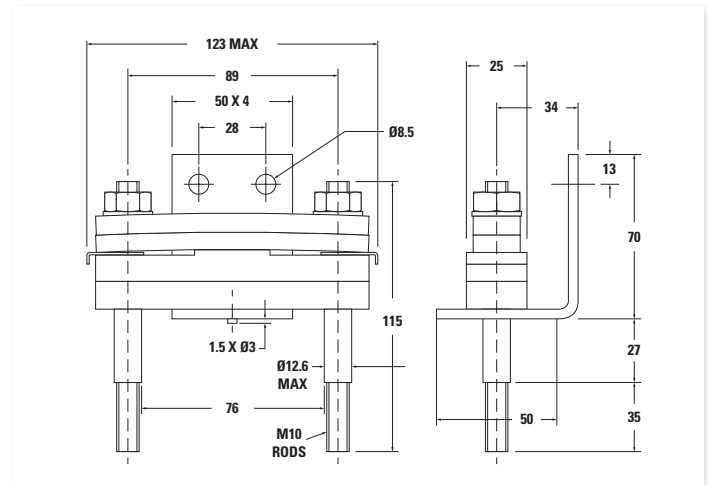


WC23 - XK2140DA076M/ML

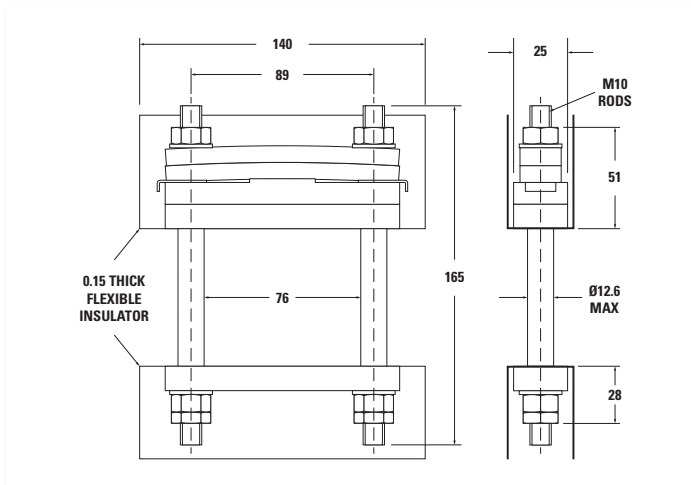


WC24 - XK2140DT076M/ML

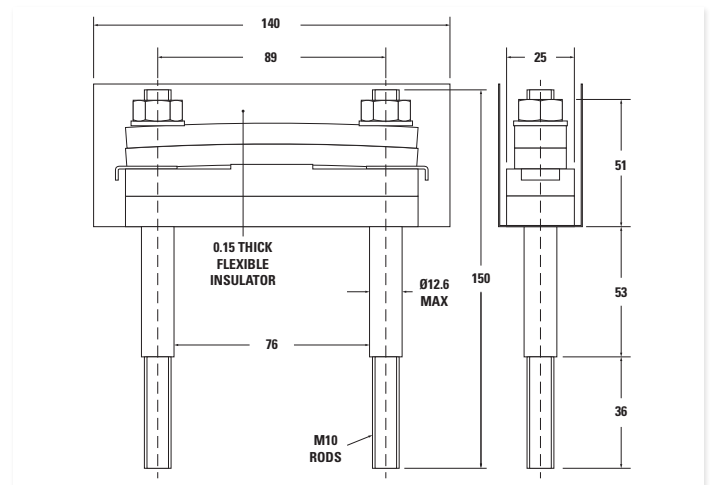


WC25 - XK2700SA076M

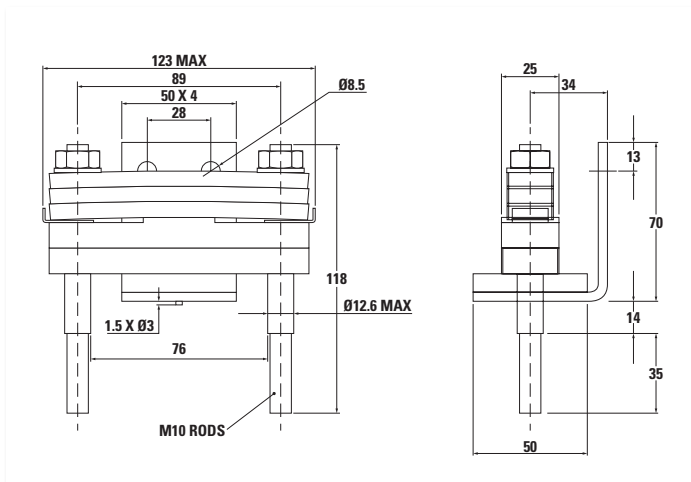


WC26 - XK2700DA076M

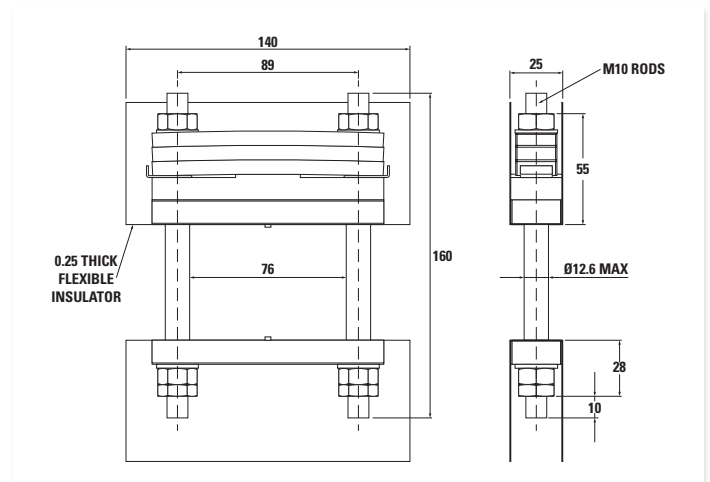


WC27 - XK2700DT076M

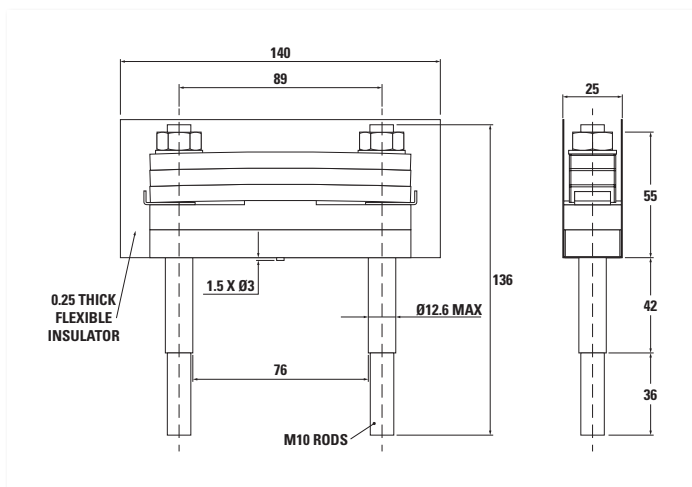


WC28 - XK2000SA114M

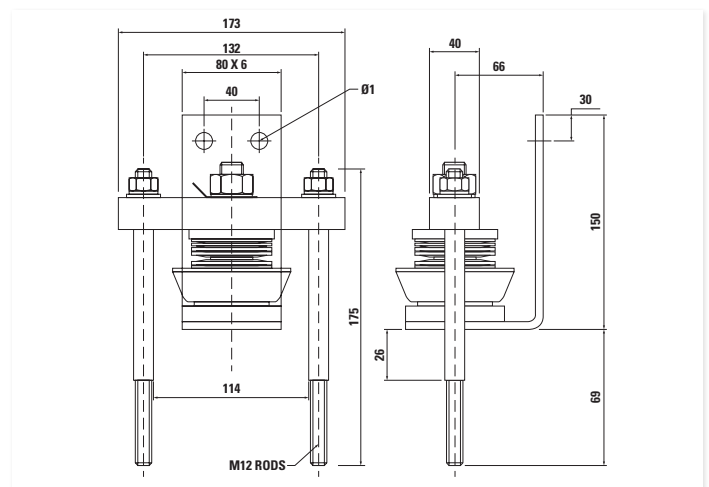


WC29 - XK2000DA114M

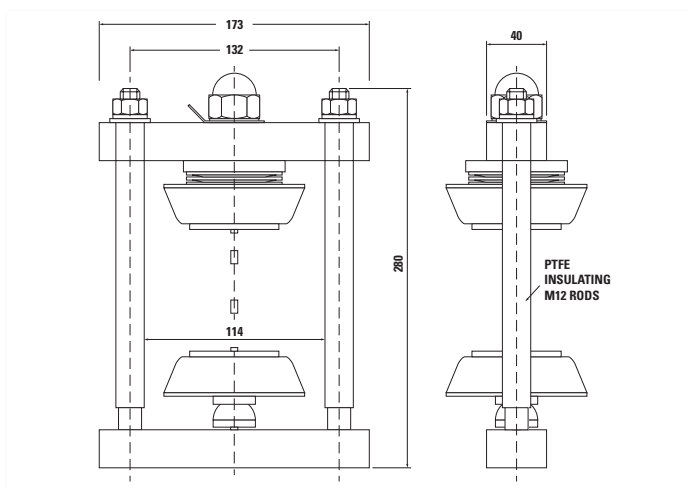


WC30 - XK2500SA114M

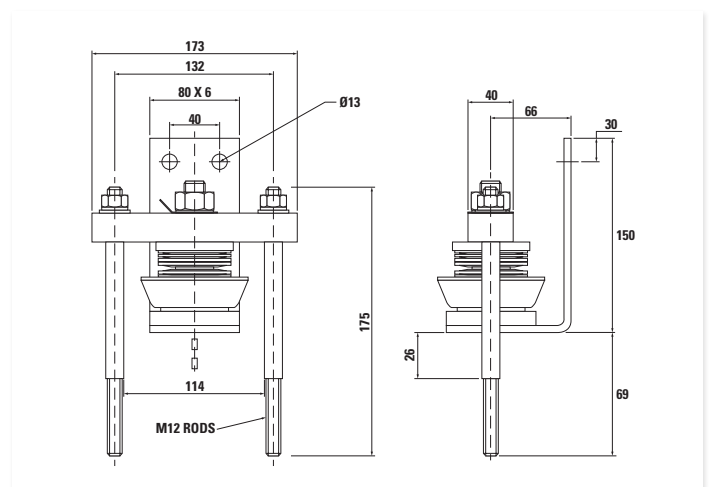


WC31 - XK2500DA114M

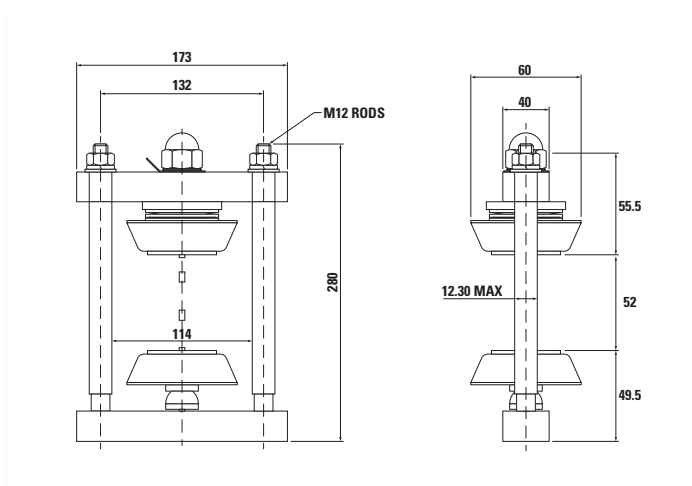


WC32 - XK2500SA116M/ML

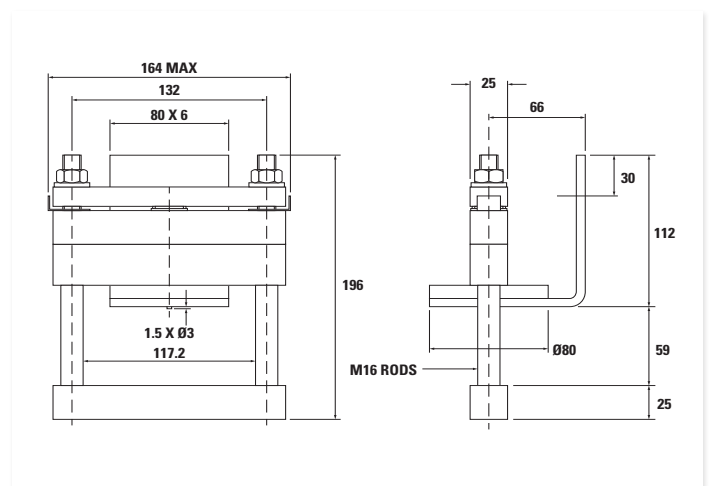


WC33 - XK2500DA116M/ML

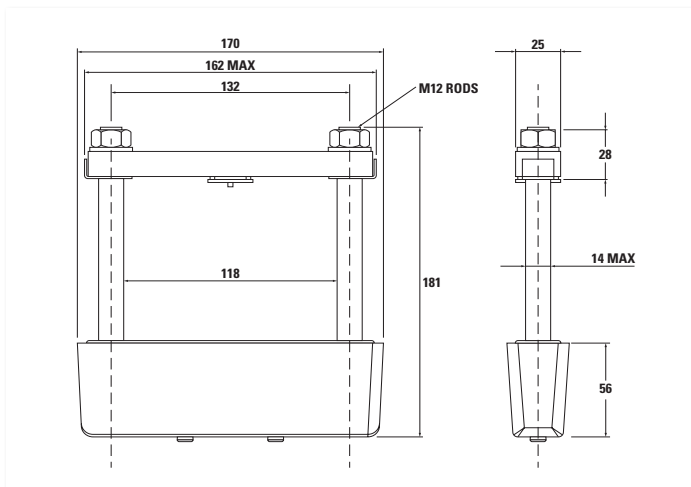


WC34 - XK3000SA116M/ML

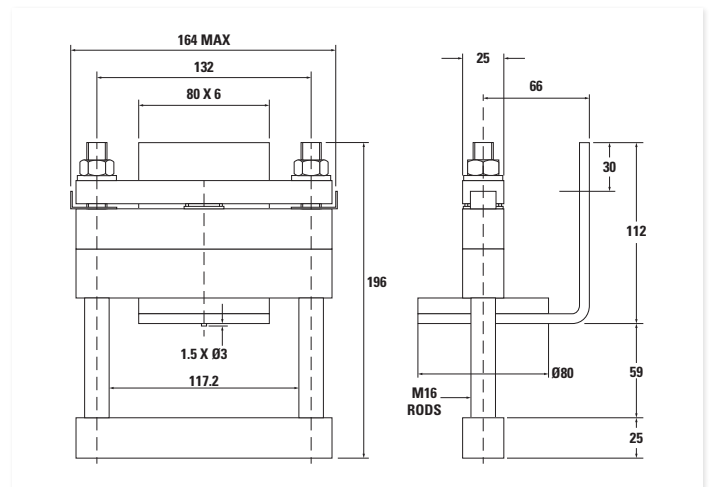


WC35 - XK3000DA116M/Mx

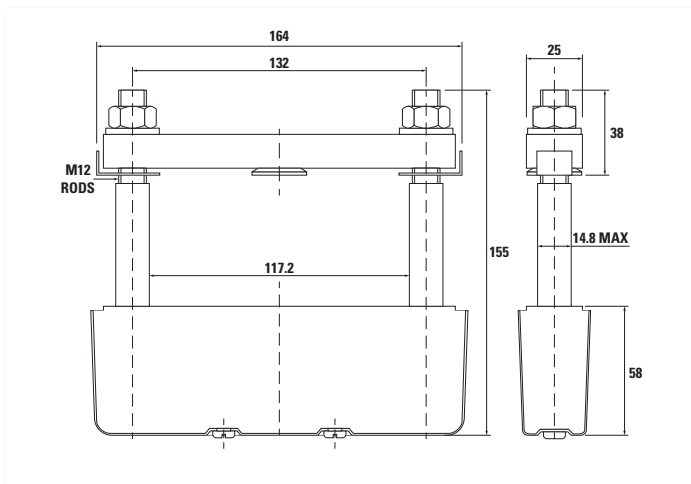


WC36 - XK3500SA116M/ML

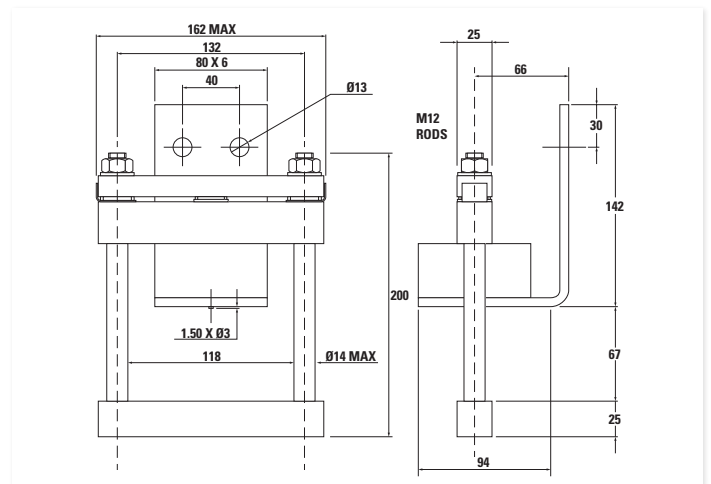


WC37 - XK3500DA116M/ML

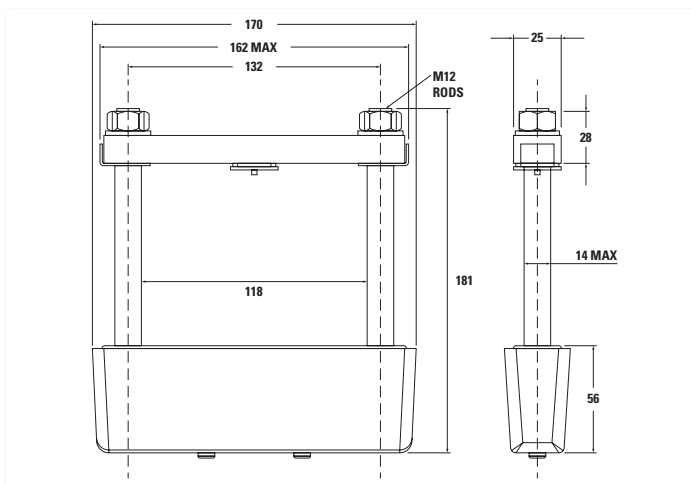


WC38 - XK4000SA116M/ML

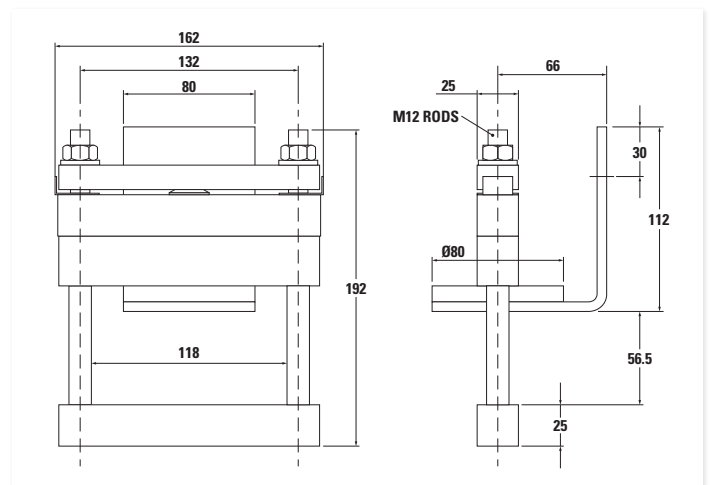


WC39 - XK4000DA116M/ML

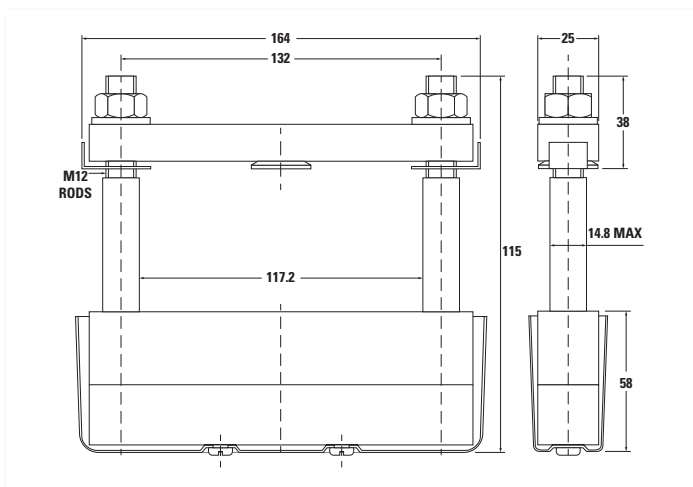


WC40 - XK5000DA128M/ML

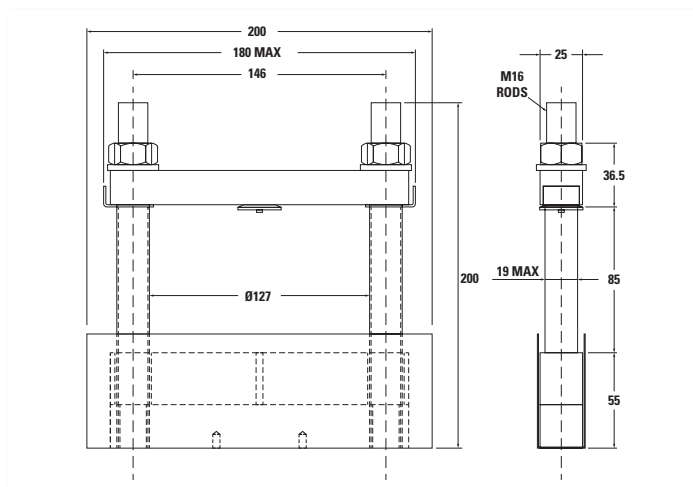


WC41 - XK7000DA128M/ML

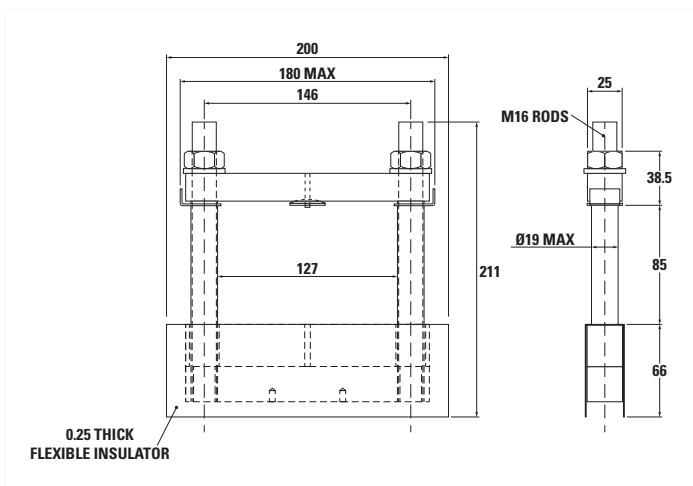


WC42 - XK3060SA140ML

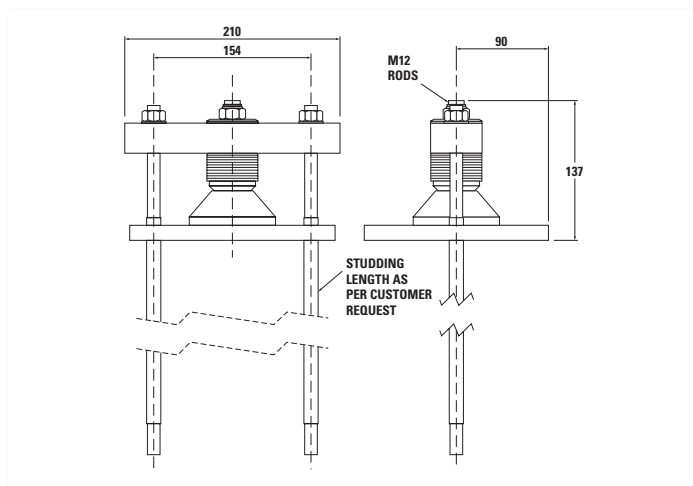


WC43 - XK3060DA140ML

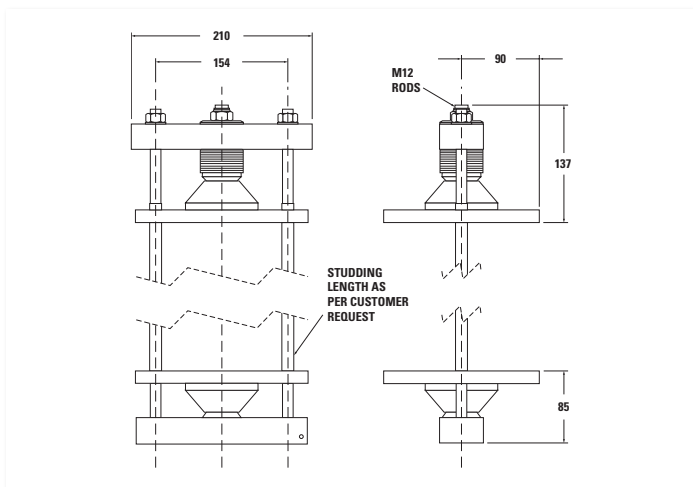


WC44 - XK9000SA160M/ML

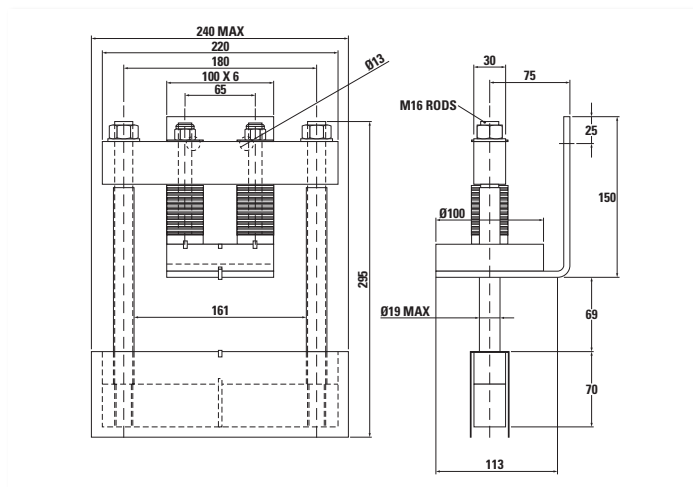


WC45 - XK9000DA160M/ML

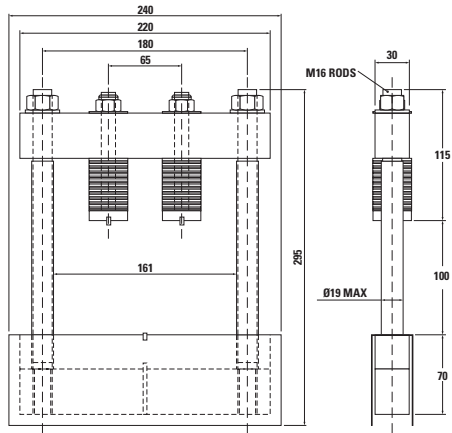


WC46 - XK6120DA180ML

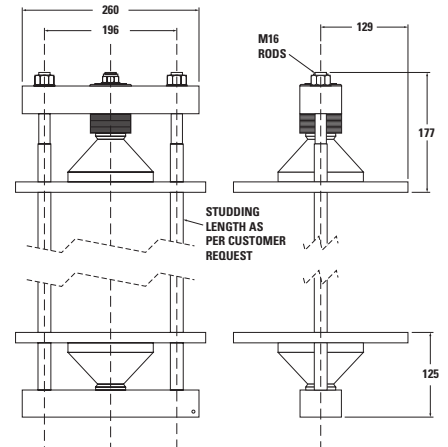


WC47 - XK6120SA180ML

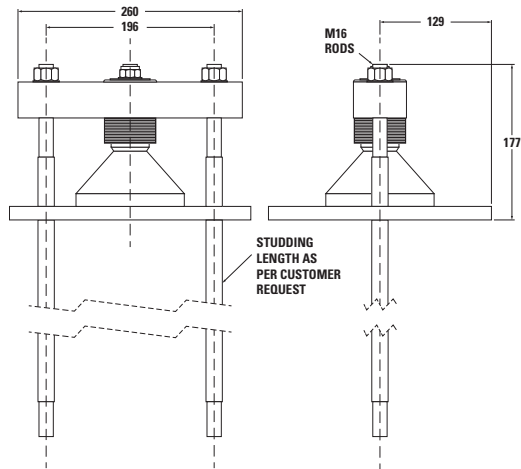


WC48 - XK0450xx019M

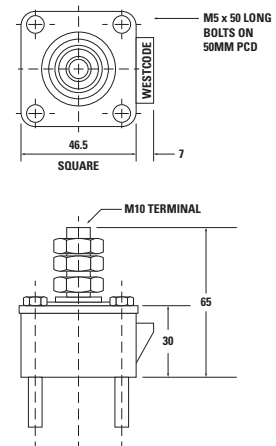


WC49 - XK####xx025M

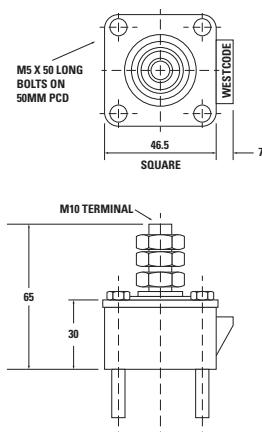

WC50 - XK1500BA034M

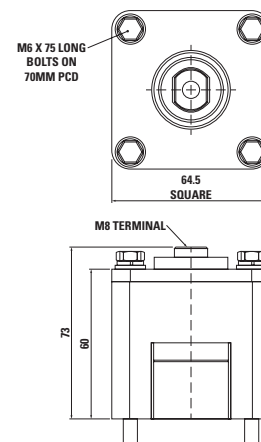


WC51 - XSK1500DA076xxx

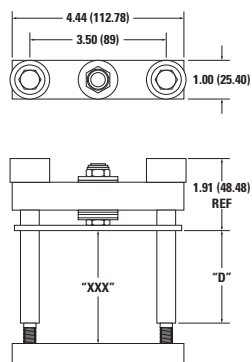

Notes:

1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.


WC52 - XSK2000DA076xxx

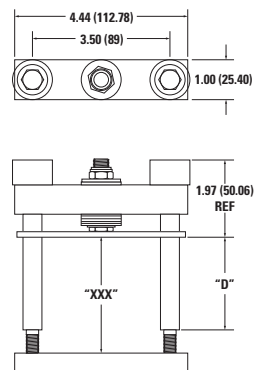

Notes:

1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.


WC53 - XSK3000DA076xxx

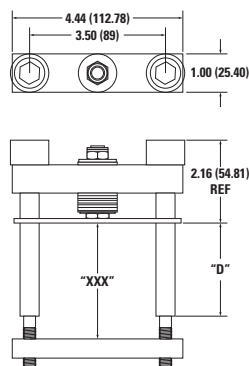

Notes:

1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.


WC54 - XSK3400DA076xxx

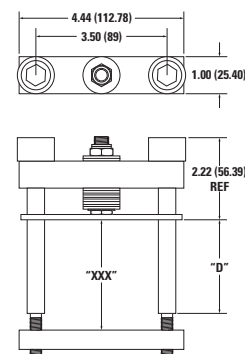

Notes:

1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.


WC55 - SK3800DA116Mxxx

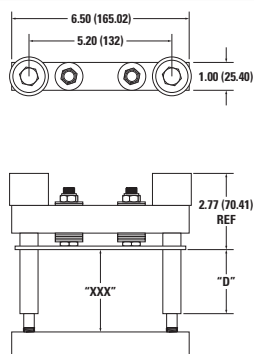

Notes:

1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSIONS CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.


WC56 - XSK4400DA116Mxxx

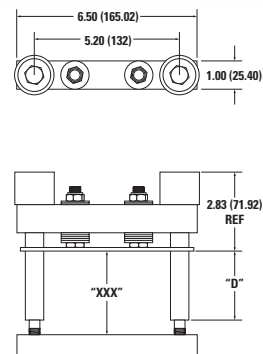

Notes:

1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.


WC57 - XSK6000DA116Mxxx

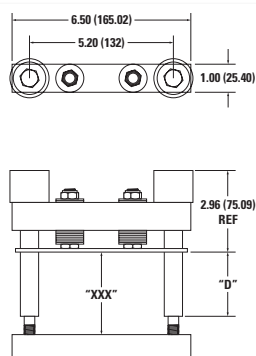


Notes:

1. DIMENSIONS IN INCHES (MILLIMETERS).
2. "Z" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.
3. "D" DIMENSION CAN BE CHANGED AS PER REQUIREMENT.


WC58- DA

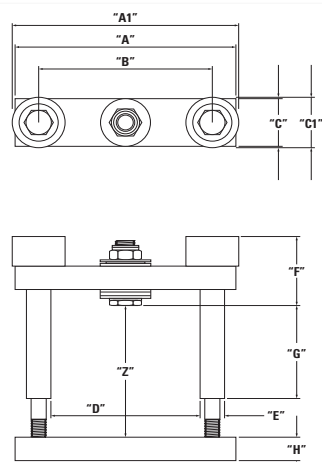


WC59 - DT

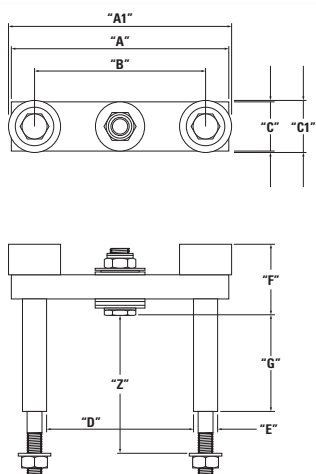


WC60 - DF

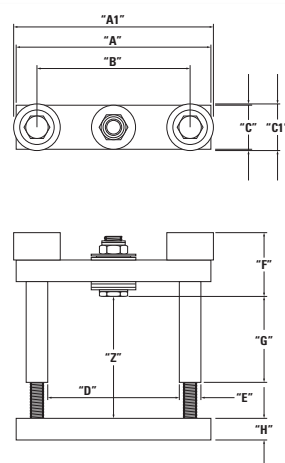


WC61 - DA

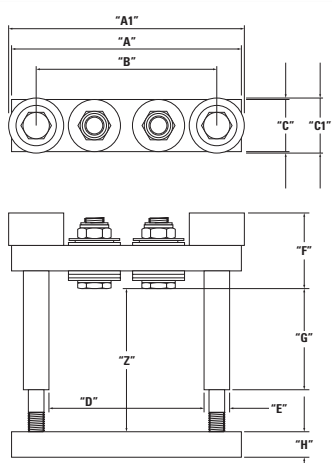


WC62 - DT

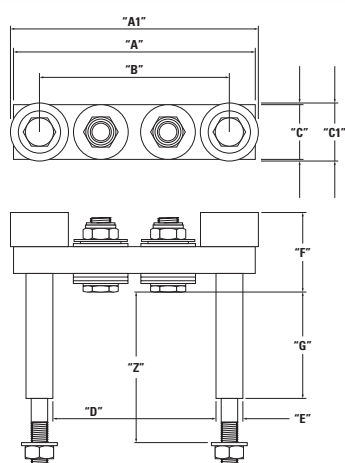


WC63 - DF

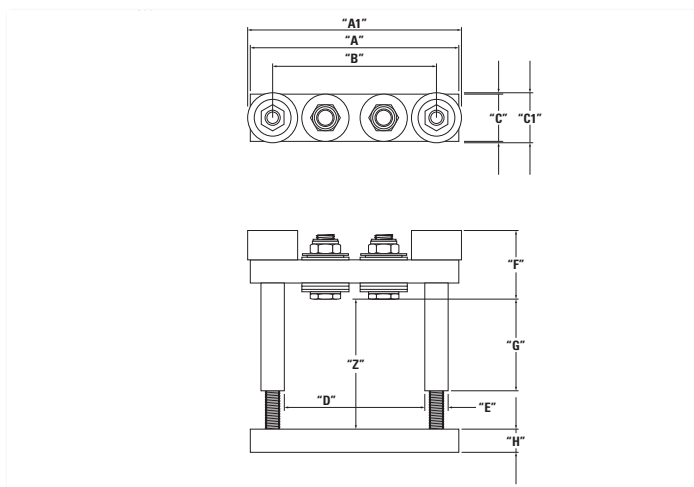


WC64 - XK1500CB034M

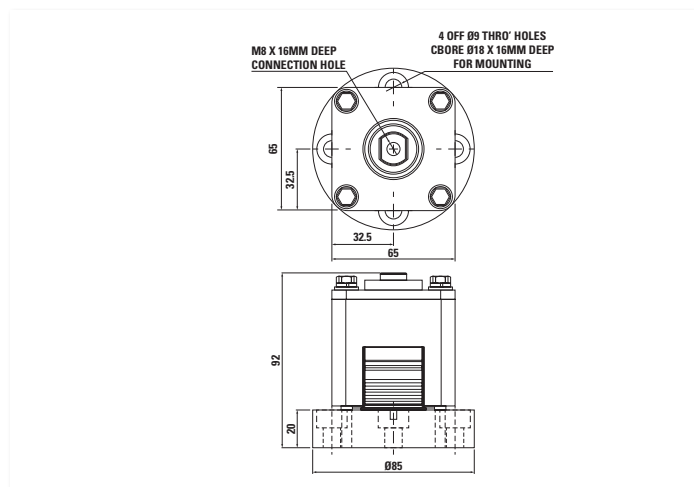


WC65 - XK1130SB076M

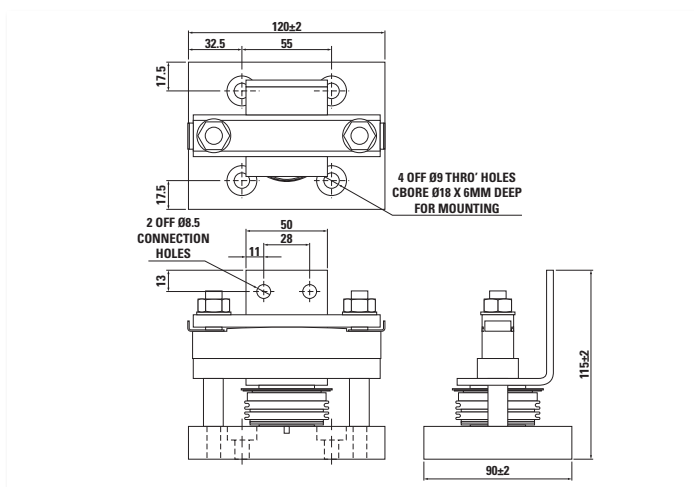


WC66 - XK2140SB076M

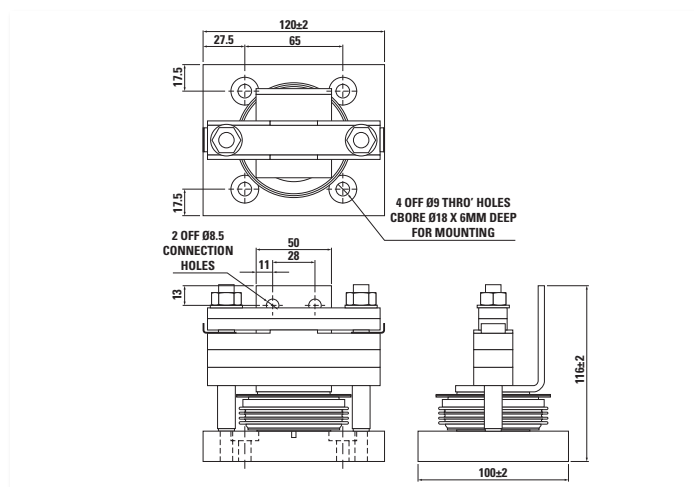


WC67 - XK8000DA180ML

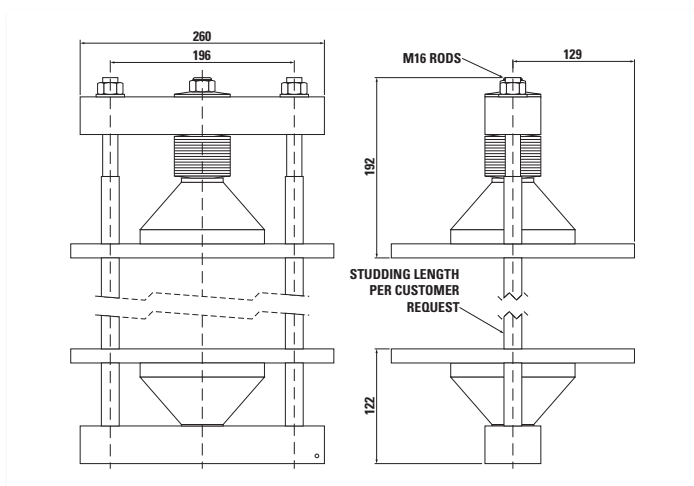


WC68 - XK8000SA180ML

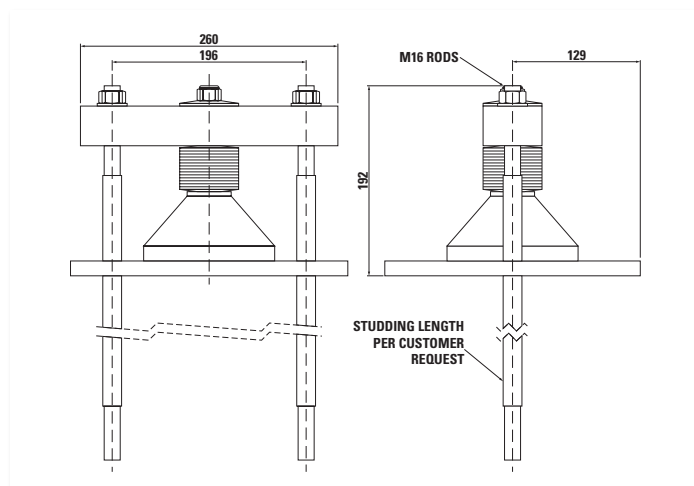


WH1 - G FIN

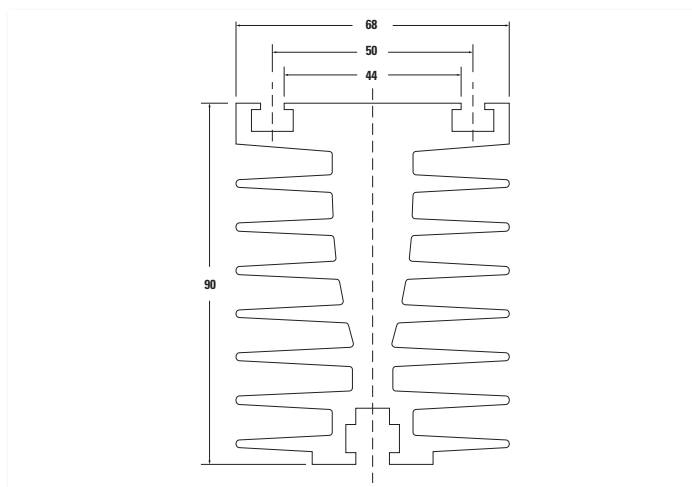


WH2 - GA FIN

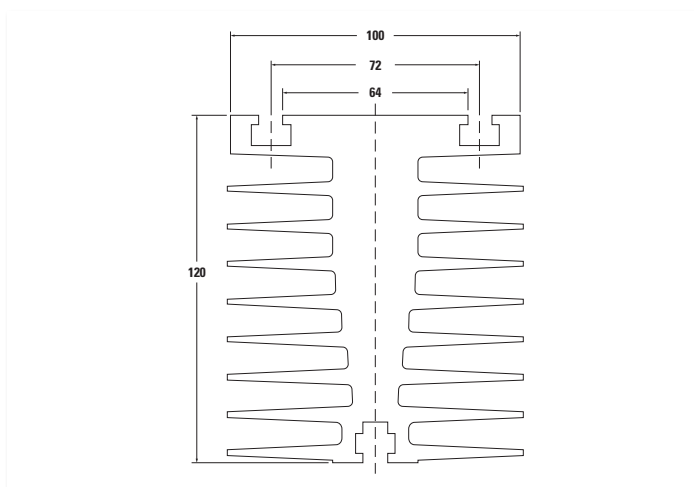


WH3 - H FIN

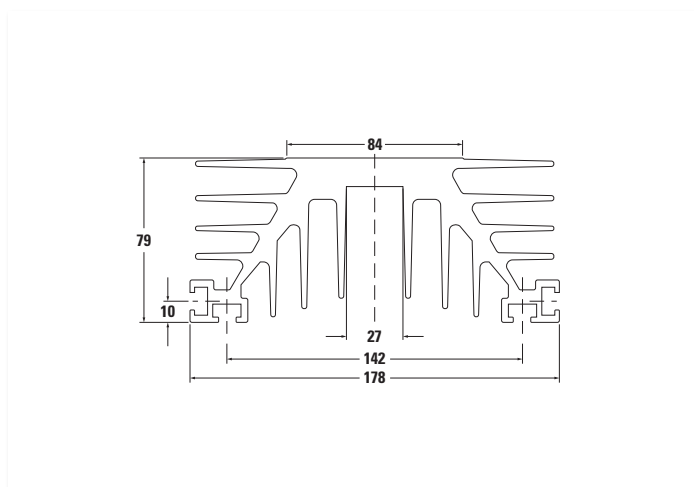


WH4 - T FIN

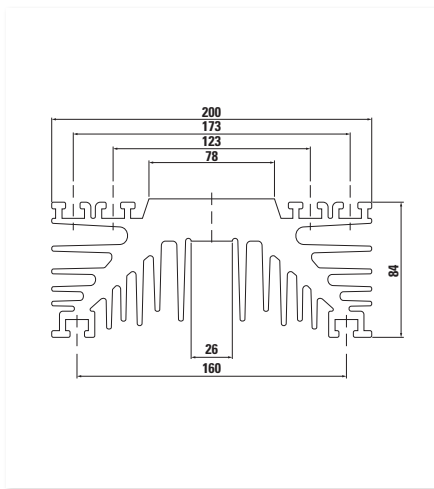


WH5 - TB FIN

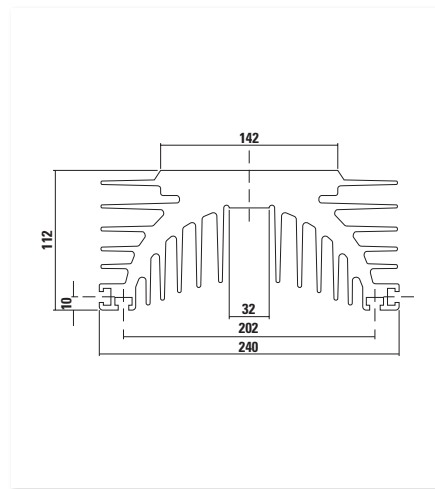


WH6 - TC FIN

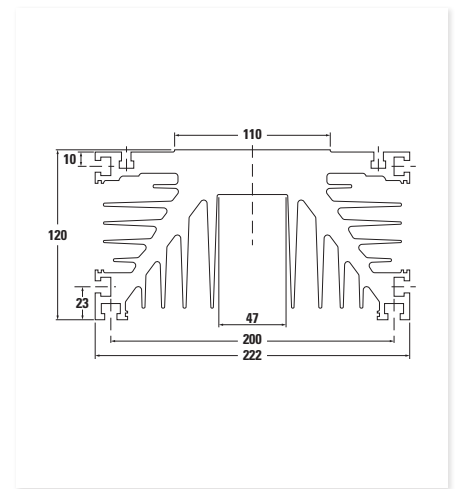


WH7 - LP100

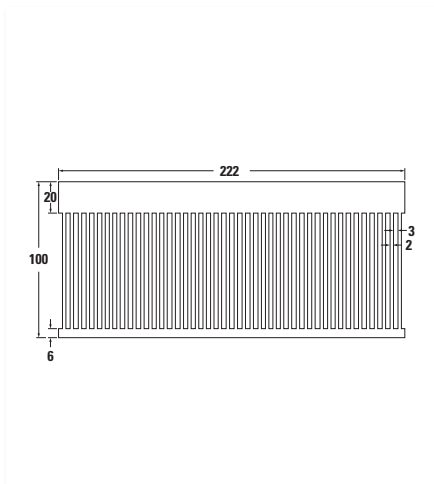

WH8 - WS46

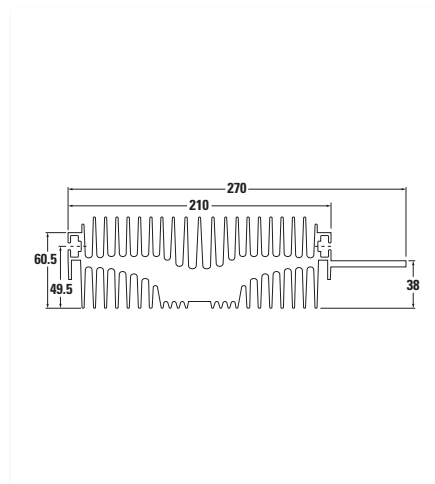


WH9 - WS30 - COPPER

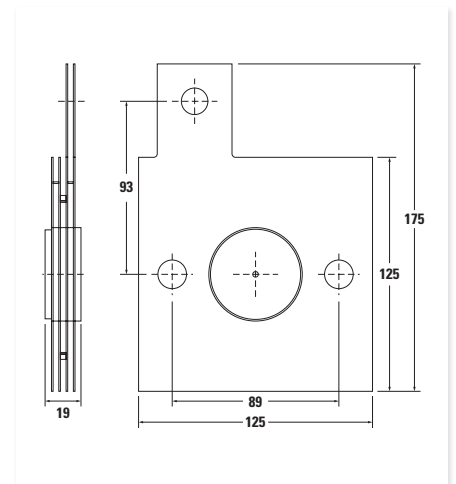


Outline Drawings


WCL1 - LK COOLER

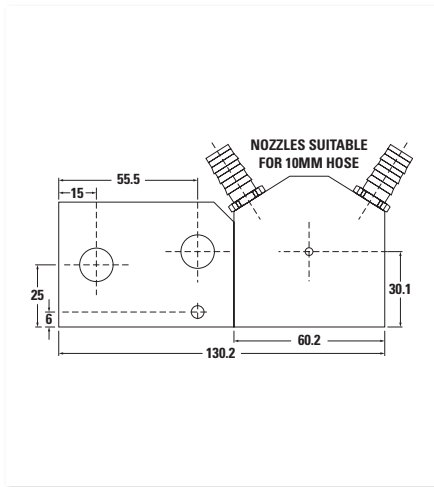


WCL2 - LKA COOLER

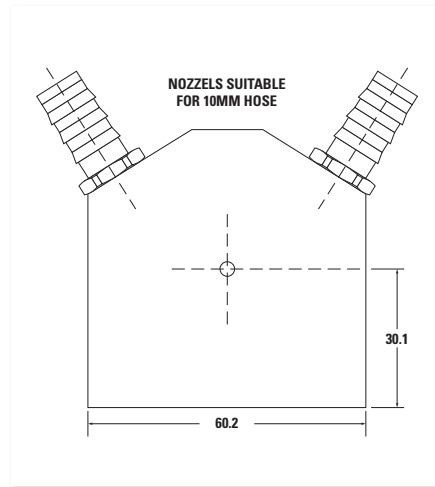


WCL3 - LKB COOLER

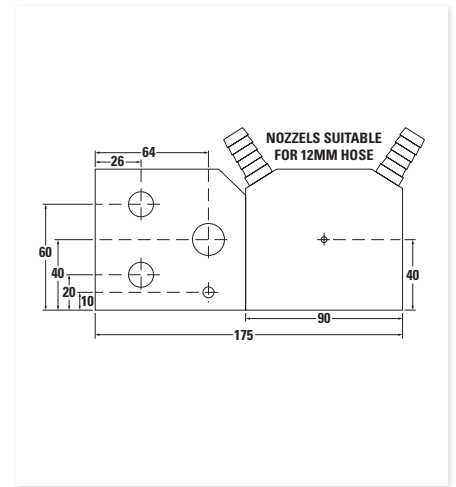


WCL4 - LKC COOLER

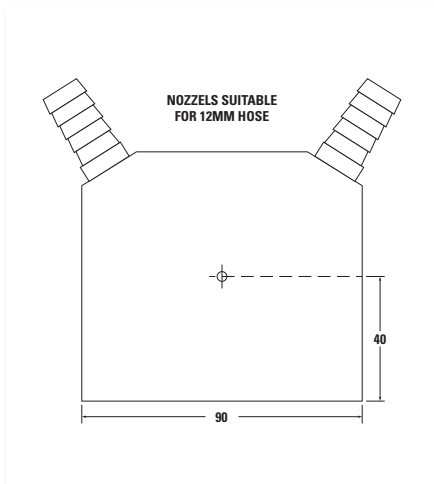


WCL5 - LKD COOLER

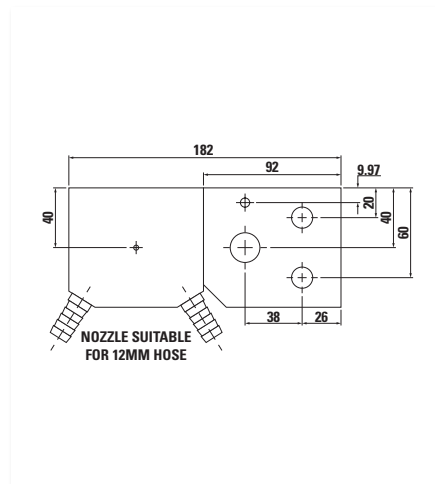


WCL6 - LKE COOLER

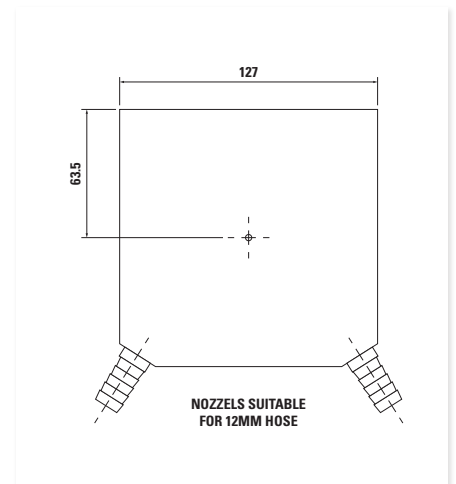


WCL7 - LKF

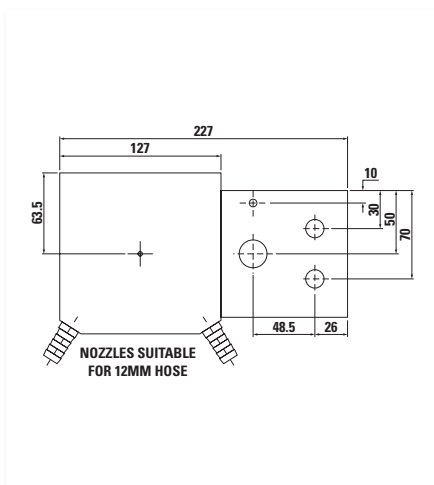


WCL8 - WS27

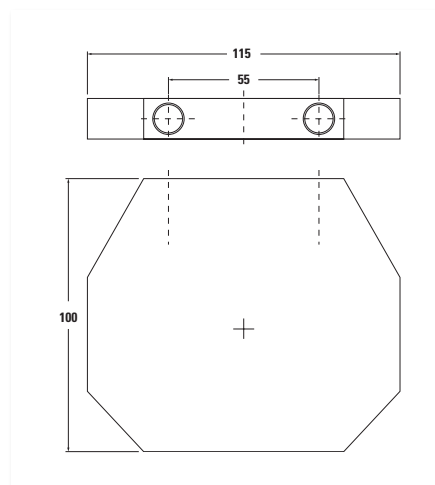


WCL9 - WS65 COOLER

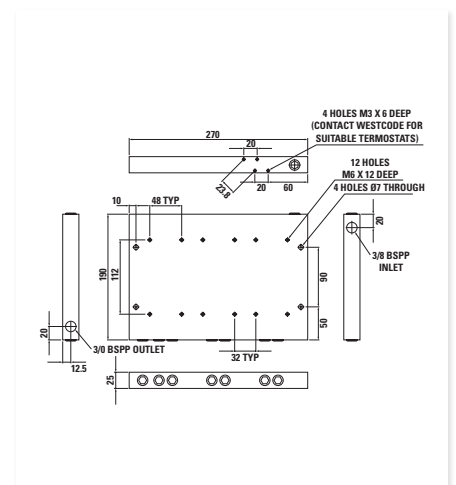


WCL19 - XW180BxxxE

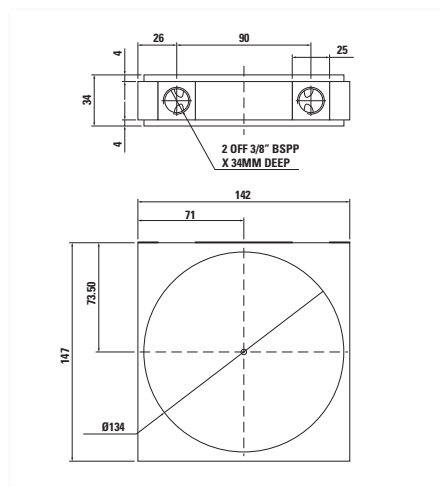

WCL20 - XW180BxxxF

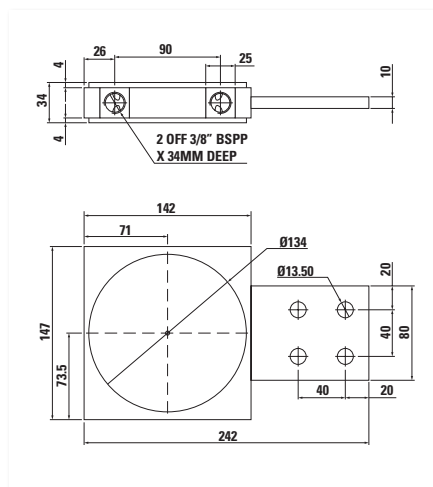


X003 TO-251 AA
Weight = 0.4 g

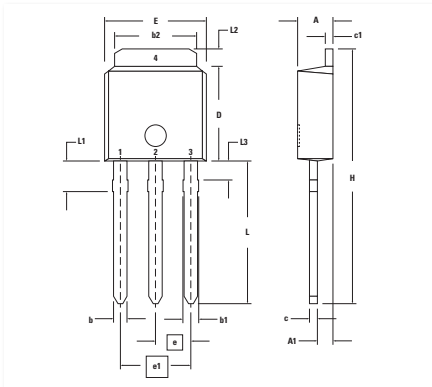


Dim	Millimeters		Inches	
	min	max	min	max
A	2.19	2.38	0.086	0.094
A1	0.89	1.14	0.035	0.045
b	0.64	0.89	0.025	0.035
b1	0.76	1.14	0.030	0.045
b2	5.21	5.46	0.205	0.215
c	0.46	0.58	0.018	0.023
c1	0.46	0.58	0.018	0.023
D	5.97	6.22	0.235	0.245
E	6.35	6.73	0.250	0.265
e	2.28 BSC		0.090 BSC	
e1	4.57 BSC		0.180 BSC	
H	17.02	17.78	0.670	0.700
L	8.89	9.65	0.350	0.380
L1	1.91	2.28	0.075	0.090
L2	0.89	1.27	0.035	0.050
L3	1.15	1.52	0.045	0.060

X004 TO-252 AA (D PAK)
Weight = 0.3 g

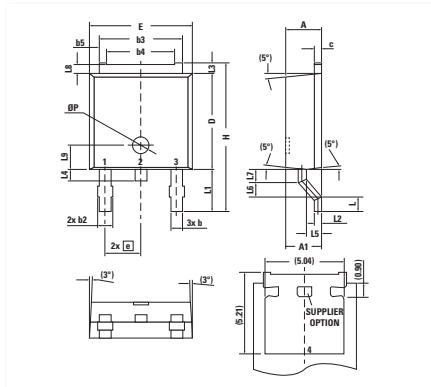


Dim	Millimeters		Inches	
	min	max	min	max
A	2.20	2.40	0.087	0.094
A1	2.10	2.50	0.083	0.098
b	0.66	0.86	0.026	0.034
b2	—	0.96	—	0.038
b3	5.04	5.64	0.198	0.222
b4	4.34 BSC		0.171 BSC	
b5	0.50 BSC		0.020 BSC	
c	0.40	0.60	0.016	0.024
D	5.90	6.30	0.232	0.248
E	6.40	6.80	0.252	0.268
e	2.10	2.50	0.083	0.098
H	9.20	9.80	0.362	0.386
L	0.55	1.02	0.022	0.040
L1	2.50	2.90	0.098	0.114
L2	0.40	0.60	0.016	0.024
L3	0.50	0.90	0.020	0.035
L4	0.60	1.00	0.024	0.039
L5	0.82	1.22	0.032	0.048
L6	0.79	0.99	0.031	0.039
L7	0.81	1.01	0.032	0.040
L8	0.40	0.80	0.016	0.031
L9	1.50 BSC		0.059 BSC	
Ø P	1.00 BSC		0.039 BSC	

X004a TO-252 AA (D PAK HV)
Weight = 0.3 g

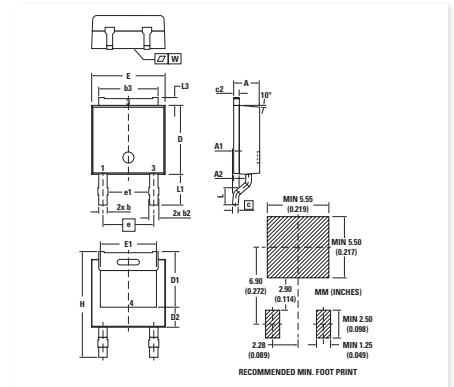


Dim	Millimeters		Inches	
	min	max	min	max
A	2.18	2.39	0.086	0.094
A1	0.00	0.13	0.000	0.005
A2	0.97	1.17	0.038	0.046
b	0.64	0.89	0.025	0.035
b2	0.76	1.14	0.030	0.045
b3	5.08	5.59	0.200	0.220
c	0.46	0.61	0.018	0.024
c2	0.46	0.58	0.018	0.023
D	5.97	6.22	0.235	0.245
D1	4.57	5.21	0.180	0.205
D2	2.03		0.080	
E	6.35	6.73	0.250	0.265
E1	4.32	5.21	0.170	0.205
e	4.57		0.180	
e1	3.62		0.143	
H	9.15	10.34	0.360	0.407
L	1.40	1.78	0.055	0.070
L1	2.54	2.92	0.100	0.115
L3	0.64	1.02	0.025	0.040
W	typ. 0.02	0.040	typ. 0.0008	0.000

X005a TO-220 AB
Weight = 2 g

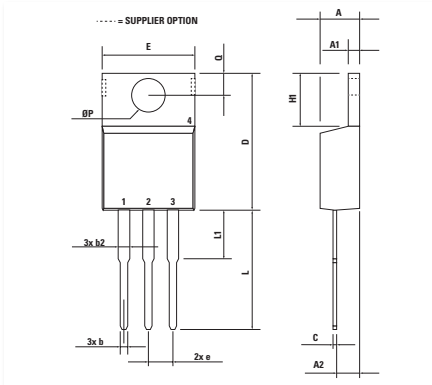


Dim	Millimeters		Inches	
	min	max	min	max
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
b2	1.15	1.65	0.045	0.065
C	0.35	0.56	0.014	0.022
D	14.73	16.00	0.580	0.630
E	9.91	10.66	0.390	0.420
e	2.54 BSC		0.100 BSC	
H1	5.85	6.85	0.230	0.270
L	12.70	13.97	0.500	0.550
L1	2.79	5.84	0.110	0.230
Ø P	3.54	4.08	0.139	0.161
Q	2.54	3.18	0.100	0.125

X005b TO-220 AC
Weight = 2 g

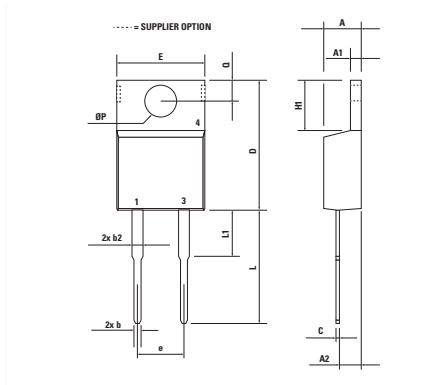

Dim	Millimeters		Inches	
	min	max	min	max
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
b2	1.15	1.65	0.045	0.065
C	0.35	0.56	0.014	0.022
D	14.73	16.00	0.580	0.630
E	9.91	10.66	0.390	0.420
e	5.08 BSC		0.200 BSC	
H1	5.85	6.85	0.230	0.270
L	12.70	13.97	0.500	0.550
L1	2.79	5.84	0.110	0.230
Ø P	3.54	4.08	0.139	0.161
Q	2.54	3.18	0.100	0.125


X006 TO-220 (5)
Weight = 2 g

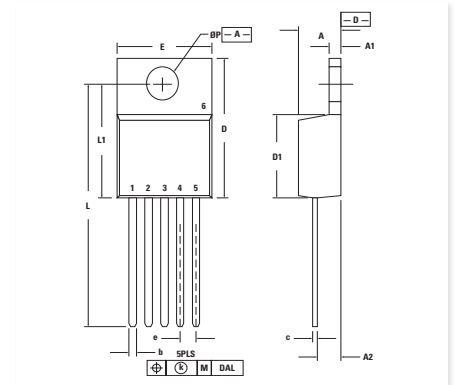

Dim	Millimeters		Inches	
	min	max	min	max
A	4.32	4.82	0.170	0.190
A1	1.14	1.39	0.045	0.055
A2	2.29	2.79	0.090	0.110
b	0.64	1.01	0.025	0.040
c	0.38	0.64	0.015	0.025
D	14.73	15.75	0.580	0.620
D1	8.64	9.40	0.340	0.370
E	9.91	10.54	0.390	0.415
e	1.70 BSC		0.067 BSC	
k	0.00	0.36	0.000	0.014
L	25.27	26.54	0.995	1.045
L1	11.94	12.95	0.470	0.510
Ø P	3.53	3.96	0.139	0.156


Outline Drawings

X007a TO-220 ABFP
Weight = 2 g

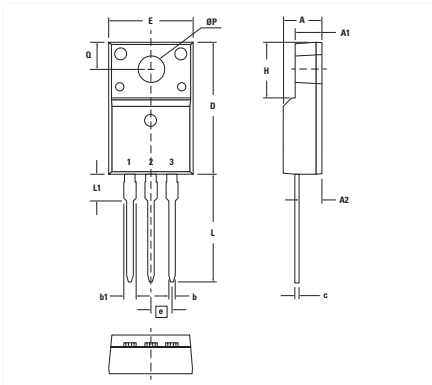


Dim	Millimeters		Inches	
	min	max	min	max
A	4.50	4.90	0.177	0.193
A1	2.34	2.74	0.092	0.108
A2	2.56	2.96	0.101	0.117
b	0.70	0.90	0.028	0.035
b1	1.27	1.47	0.050	0.058
c	0.45	0.60	0.018	0.024
D	15.67	16.07	0.617	0.633
E	9.96	10.36	0.392	0.408
e	2.54 BSC		0.100 BSC	
H	6.48	6.88	0.255	0.271
L	12.68	13.28	0.499	0.523
L1	3.03	3.43	0.119	0.135
ØP	3.08	3.28	0.121	0.129
Q	3.20	3.40	0.126	0.134

X007b TO-220 ACFP
Weight = 2 g

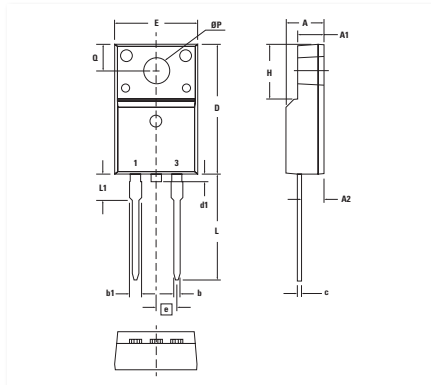


Dim	Millimeters		Inches	
	min	max	min	max
A	4.50	4.90	0.177	0.193
A1	2.34	2.74	0.092	0.108
A2	2.56	2.96	0.101	0.117
b	0.70	0.90	0.028	0.035
b1	1.27	1.47	0.050	0.058
c	0.45	0.60	0.018	0.024
D	15.67	16.07	0.617	0.633
d1	0.00	1.10	0.000	0.043
E	9.96	10.36	0.392	0.408
e	2.54 BSC		0.100 BSC	
H	6.48	6.88	0.255	0.271
L	12.68	13.28	0.499	0.523
L1	3.03	3.43	0.119	0.135
ØP	3.08	3.28	0.121	0.129
Q	3.20	3.40	0.126	0.134

X008a TO-262 I2PAK
Weight = 1.5 g

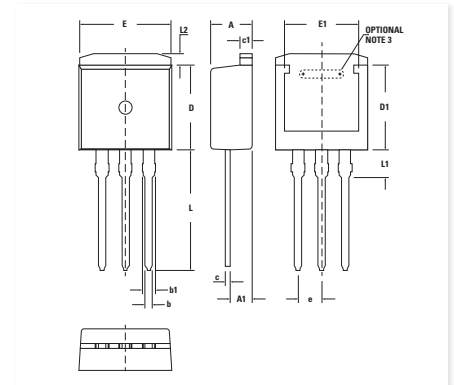


Dim	Millimeters		Inches	
	min	max	min	max
A1	2.20	2.60	0.087	0.102
b	0.70	0.90	0.028	0.035
b1	1.37	1.57	0.054	0.062
c	0.45	0.60	0.018	0.024
c1	1.25	1.40	0.049	0.055
D	9.00	9.40	0.355	0.370
D1	7.20		0.284	
E	9.70	9.90	0.382	0.390
E1	7.00		0.276	
e	2.54 BSC		0.100 BSC	
L	12.88	13.28	0.507	0.523
L1	3.00	—	0.118	—
L2	1.00	1.40	0.039	0.055

X008b TO-262 I2PAK
Weight = 1.5 g

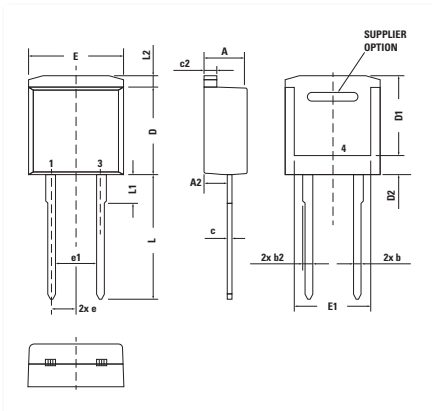


Dim	Millimeters		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A2	2.41		0.095	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
D2	2.5		0.098	
E	9.65	10.41	0.380	0.410
E1	6.22	8.50	0.245	0.335
e	2.54 BSC		0.100 BSC	
e1	4.28		0.169	
L	13.00	13.60	0.512	0.535
L1	2.90	3.10	0.114	0.122
L2	1.02	1.68	0.040	0.066

X009a PLUS220™
Weight = 2.5 g b) middle leg cut

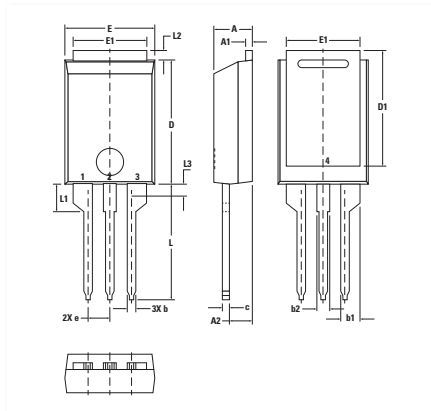


Dim	Millimeters		Inches	
	min	max	min	max
A	4.30	4.70	0.169	0.185
A1	0.70	0.90	0.028	0.035
A2	2.50	3.00	0.098	0.118
b	0.90	1.20	0.035	0.047
b1	2.03	2.41	0.080	0.095
b2	1.37	1.63	0.054	0.064
c	0.70	0.90	0.028	0.035
D	14.00	15.00	0.551	0.591
D1	13.00	13.70	0.512	0.539
E	10.00	11.00	0.394	0.433
E1	8.40	8.80	0.331	0.346
e	2.54 BSC		0.100 BSC	
L	13.00	14.00	0.512	0.551
L1	3.00	3.50	0.118	0.138
L2	0.90	1.30	0.035	0.051
L3	1.20	1.50	0.047	0.059

X010a ISOPLUS220™ AB
Weight = 2.5 g

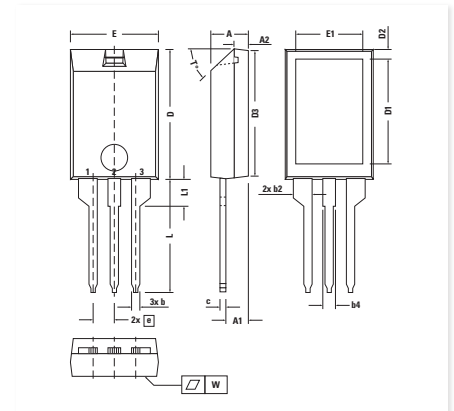


Dim	Millimeters		Inches	
	min	max	min	max
A	4.00	5.00	0.157	0.197
A1	2.50	3.00	0.098	0.118
A2	1.60	1.80	0.063	0.071
b	0.90	1.30	0.035	0.051
b2	2.35	2.55	0.093	0.100
b4	1.25	1.65	0.049	0.065
c	0.70	1.00	0.028	0.039
D	15.00	16.00	0.591	0.630
D1	12.00	13.00	0.472	0.512
D2	1.10	1.50	0.043	0.059
D3	14.90	15.50	0.587	0.610
E	10.00	11.00	0.394	0.433
E1	7.50	8.50	0.295	0.335
e	2.54 BSC		0.100 BSC	
L	13.00	14.50	0.512	0.571
L1	3.00	3.50	0.118	0.138
T°	42.5	47.5	—	—
W	—	0.10	—	0.004

X010b ISOPLUS220™ AC
Weight = 2.5 g

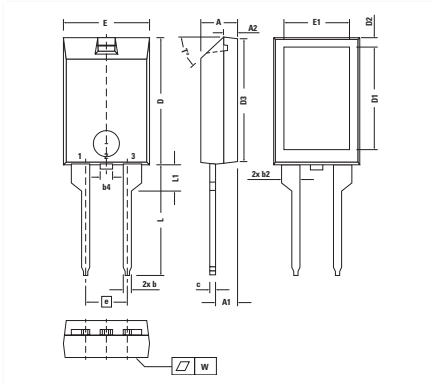


Dim	Millimeters		Inches	
	min	max	min	max
A	4.00	5.00	0.157	0.197
A1	2.50	3.00	0.098	0.118
A2	1.60	1.80	0.063	0.071
b	0.90	1.30	0.035	0.051
b2	1.25	1.65	0.049	0.065
b4	2.35	2.55	0.093	0.100
c	0.70	1.00	0.028	0.039
D	15.00	16.00	0.591	0.630
D1	12.00	13.00	0.472	0.512
D2	1.10	1.50	0.043	0.059
D3	14.90	15.50	0.587	0.610
E	10.00	11.00	0.394	0.433
E1	7.50	8.50	0.295	0.335
e	5.08 BSC		0.200 BSC	
L	13.00	14.50	0.512	0.571
L1	3.00	3.50	0.118	0.138
T°	42.5	47.5	—	—
W	—	0.10	—	0.004

X011a TO-263 AA (D2PAK)
Weight = 1.5 g

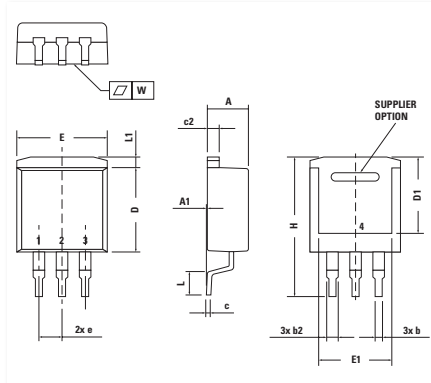


Dim	Millimeters		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ. 0.10		typ. 0.004	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
E	9.65	10.41	0.380	0.410
E1	6.22	8.13	0.245	0.320
e	2.54 BSC		0.100 BSC	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L1	1.02	1.68	0.040	0.066
W	typ. 0.02	0.040	typ. 0.0008	0.002

X011b TO-263 AB (D2PAK)
Weight = 1.5 g

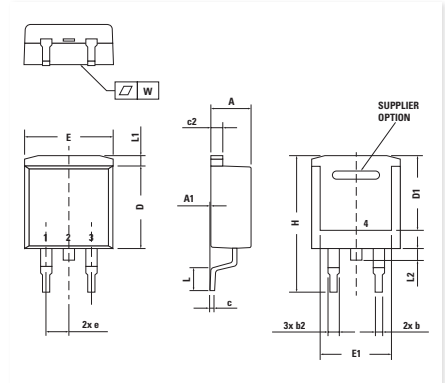


Dim	Millimeters		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ. 0.10		typ. 0.004	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
E	9.65	10.41	0.380	0.410
E1	6.22	8.13	0.245	0.320
e	2.54 BSC		0.100 BSC	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L1	1.02	1.68	0.040	0.066
W	typ. 0.02	0.040	typ. 0.0008	0.002

X011c TO-263 AB (D2PAK HV)
Weight = 1.5 g

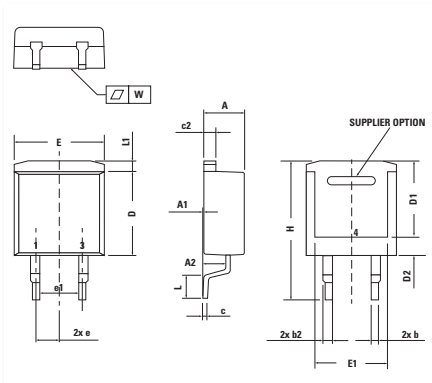


Dim	Millimeters		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ 0.10		typ 0.004	
A2	2.410		0.095	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
D2	2.5		0.098	
E	9.65	10.41	0.380	0.410
E1	6.22	8.50	0.245	0.335
e	2.54 BSC		0.100 BSC	
e1	4.280		0.169	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L2	1.02	1.68	0.040	0.066
W	typ 0.02	0.040	typ 0.0008	0.002

X012a TO-263 (5)
Weight = 1.5 g

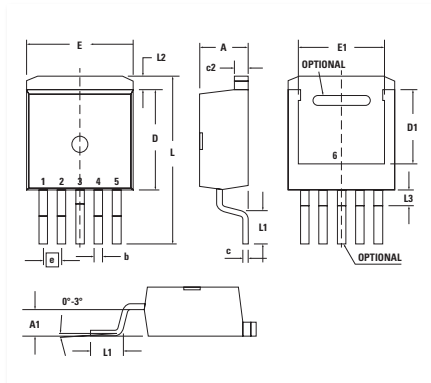

Dim	Millimeters		Inches	
	min	max	min	max
A	4.20	4.80	0.160	0.190
A1	2.10	2.70	0.083	0.106
b	0.60	0.99	0.024	0.039
c	0.40	0.70	0.016	0.028
c2	1.20	1.40	0.047	0.055
D	8.80	9.50	0.346	0.374
D1	6.60	7.20	0.260	0.283
E	9.65	10.30	0.380	0.406
E1	7.50	8.20	0.295	0.323
e	1.70 BSC		0.067 BSC	
L	14.80	15.80	0.583	0.622
L1	2.24	2.84	0.088	0.112
L2	1.00	1.40	0.039	0.067
L3	1.20	1.70	0.047	0.067


X012b TO-263 (7)
Weight = 2.5 g c) middle leg cut

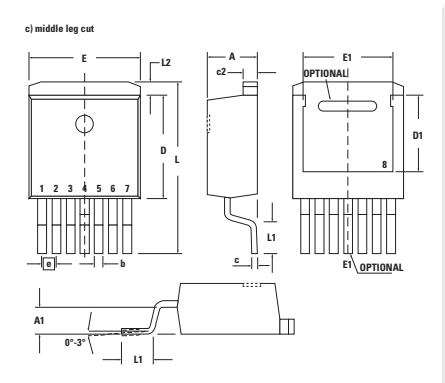

Dim	Millimeters		Inches	
	min	max	min	max
A	4.20	4.60	0.165	0.181
A1	2.45	2.75	0.096	0.108
b	0.65	0.90	0.026	0.035
c	0.40	0.60	0.016	0.024
c2	1.14	1.40	0.045	0.055
D	8.38	8.64	0.330	0.340
D1	6.10	6.35	0.240	0.250
E	10.00	10.30	0.394	0.406
E1	7.34	8.00	0.290	0.315
e	1.27 BSC		0.050 BSC	
L	14.73	15.75	0.580	0.620
L1	2.24	2.84	0.088	0.112
L2	1.35	1.55	0.053	0.061


Outline Drawings

X013 PLUS220™ (SMD)
Weight = 2 g

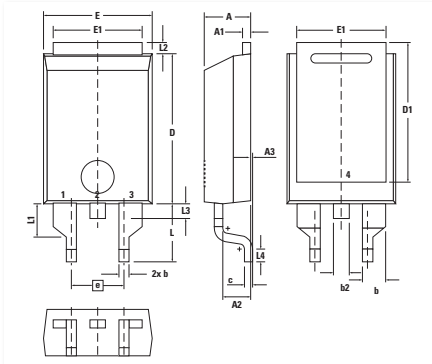


Dim	Millimeters		Inches	
	min	max	min	max
A	4.30	4.70	0.169	0.185
A1	0.70	0.90	0.028	0.035
A2	2.50	3.00	0.098	0.118
A3	0.00	0.25	0.000	0.010
b	0.90	1.20	0.035	0.047
b1	2.03	2.41	0.080	0.095
b2	1.37	1.63	0.054	0.064
c	0.70	0.90	0.028	0.035
D	14.00	15.00	0.551	0.591
D1	13.00	13.70	0.512	0.539
E	10.00	11.00	0.394	0.433
E1	8.40	8.80	0.331	0.346
e	5.08 BSC		0.200 BSC	
L	5.30	5.80	0.209	0.228
L1	3.00	3.50	0.118	0.138
L2	0.90	1.30	0.035	0.051
L3	1.20	1.50	0.047	0.059
L4	1.00	1.50	0.039	0.059

X014a TO-247 AD
Weight = 6 g

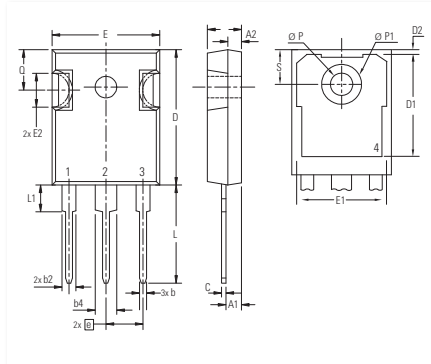


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
c	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.845
D1	13.07	—	0.515	—
D2	0.51	1.35	0.020	0.053
E	15.48	16.24	0.610	0.640
E1	13.45	—	0.53	—
E2	4.31	5.48	0.170	0.216
e	5.45 BSC		0.215 BSC	
L	19.80	20.30	0.078	0.800
L1	—	4.49	—	0.177
Ø P	3.55	3.65	0.140	0.144
Ø P1	—	7.39	—	0.290
Q	5.38	6.19	0.212	0.244
S	6.14 BSC		0.242 BSC	

X014b TO-247 AD
Weight = 6 g

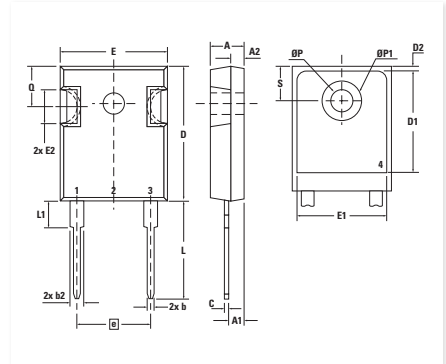


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
c	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.845
D1	13.07	—	0.515	—
D2	0.51	1.35	0.020	0.053
E	15.48	16.24	0.610	0.640
E1	13.45	—	0.530	—
E2	4.31	5.48	0.170	0.216
e	10.90 BSC		0.430 BSC	
L	19.80	20.30	0.078	0.800
L1	—	4.49	—	0.177
Ø P	3.55	3.65	0.140	0.144
Ø P1	—	7.39	—	0.290
Q	5.38	6.19	0.212	0.244
S	6.14 BSC		0.242 BSC	

X014c TO-247 AD
Weight = 6 g

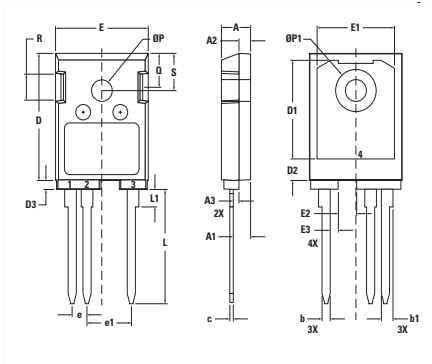


Dim	Millimeters		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.90	3.10	0.114	0.122
A2	1.90	2.10	0.075	0.083
A3	0.90	1.10	0.035	0.043
b	1.35	1.50	0.053	0.059
b1	1.90	2.10	0.075	0.083
c	0.55	0.75	0.022	0.030
D	20.80	21.40	0.819	0.843
D1	16.20	16.40	0.638	0.646
D2	3.40	3.70	0.134	0.146
D3	1.40	1.60	0.055	0.063
E	15.80	16.20	0.622	0.638
E1	13.20	13.40	0.520	0.528
E2	3.00	3.20	0.118	0.126
E3	1.30	1.50	0.051	0.059
e	2.54 BSC		0.100 BSC	
e1	7.62 BSC		0.300 BSC	
L	18.60	19.00	0.732	0.748
L1	2.70	3.00	0.106	0.118
Ø P	3.50	3.60	0.138	0.142
Ø P1	6.90	7.10	0.272	0.280
Q	5.50	5.70	0.216	0.224
R	4.20	4.30	0.165	0.169
S	6.10	6.30	0.240	0.248

X015a PLUS247™
Weight = 7 g

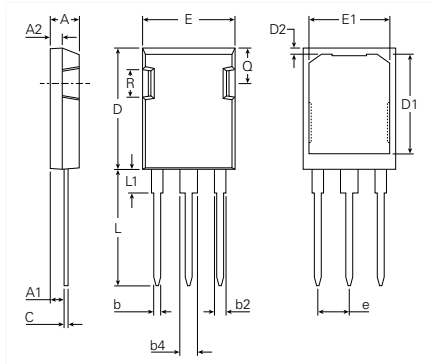


Dim	Millimeters		Inches	
	min	max	min	max
A	0.190	0.205	4.83	5.21
A1	0.090	0.100	2.29	2.54
A2	0.075	0.085	1.91	2.16
b	0.045	0.055	1.14	1.40
b2	0.075	0.087	1.91	2.20
b4	0.115	0.126	2.92	3.20
C	0.024	0.031	0.61	0.80
D	0.819	0.840	20.80	21.34
D1	0.650	0.690	16.51	17.53
D2	0.035	0.050	0.89	1.27
E	0.620	0.635	15.75	16.13
E1	0.520	0.560	13.08	14.22
e	0.215 BSC		5.45 BSC	
L	0.780	0.810	19.81	20.57
L1	0.150	0.170	3.81	4.32
Q	0.220	0.244	5.59	6.20
R	0.170	0.190	4.32	4.83

X015c PLUS247™
Weight = 7 g

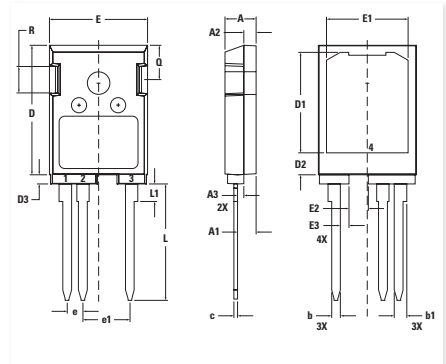


Dim	Millimeters		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.90	3.10	0.114	0.122
A2	1.90	2.10	0.075	0.083
A3	0.90	1.10	0.035	0.043
b	1.35	1.50	0.053	0.059
b1	1.90	2.10	0.075	0.083
c	0.55	0.75	0.022	0.030
D	20.80	21.40	0.819	0.843
D1	16.20	16.40	0.638	0.646
D2	3.40	3.70	0.134	0.146
D3	1.40	1.60	0.055	0.063
E	15.80	16.20	0.622	0.638
E1	13.20	13.40	0.520	0.528
E2	3.00	3.20	0.118	0.126
E3	1.30	1.50	0.051	0.059
e	2.54 BSC		0.100 BSC	
e1	7.62 BSC		0.300 BSC	
L	18.60	19.00	0.732	0.748
L1	2.70	3.00	0.106	0.118
Q	5.50	5.70	0.216	0.224
R	4.20	4.30	0.165	0.169

X016a ISOPLUS247™
Weight = 4.5 g

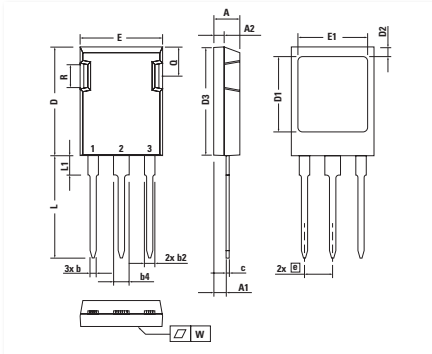


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.29	2.54	0.090	0.100
A2	1.91	2.16	0.075	0.085
b	1.14	1.40	0.045	0.055
b2	1.91	2.20	0.075	0.087
b4	2.92	3.24	0.115	0.128
c	0.61	0.83	0.024	0.033
D	20.80	21.34	0.819	0.840
D1	15.75	16.26	0.620	0.640
D2	1.65	2.15	0.065	0.085
D3	20.30	20.70	0.799	0.815
E	15.75	16.13	0.620	0.635
E1	13.21	13.72	0.520	0.540
e	5.45 BSC		0.215 BSC	
L	19.81	20.60	0.780	0.811
L1	3.81	4.38	0.150	0.172
Q	5.59	6.20	0.220	0.244
R	4.25	5.50	0.167	0.217
W	—	0.10	—	0.004

X016b ISOPLUS247™
Weight = 4.5 g

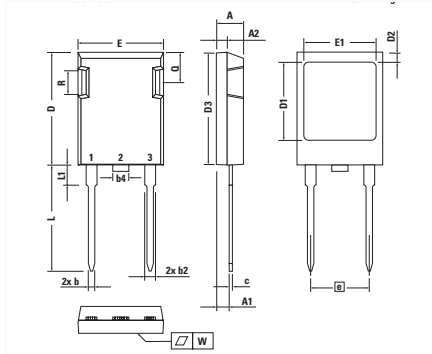


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.29	2.54	0.090	0.100
A2	1.91	2.16	0.075	0.085
b	1.14	1.40	0.045	0.055
b2	1.91	2.20	0.075	0.087
b4	2.92	3.24	0.115	0.128
c	0.61	0.83	0.024	0.033
D	20.80	21.34	0.819	0.840
D1	15.75	16.26	0.620	0.640
D2	1.65	2.15	0.065	0.085
D3	20.30	20.70	0.799	0.815
E	15.75	16.13	0.620	0.635
E1	13.21	13.72	0.520	0.540
e	10.90 BSC		0.430 BSC	
L	19.81	20.60	0.780	0.811
L1	3.81	4.38	0.150	0.172
Q	5.59	6.20	0.220	0.244
R	4.25	5.50	0.167	0.217
W	—	0.10	—	0.004

X016c ISO247™
Weight = 4.5 g

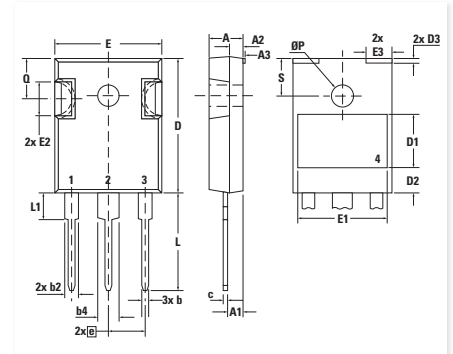


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
A3	0.05		0.002	
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
C	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.844
D1	8.90		0.350	
D2	2.90		0.114	
D3	1.00		0.039	
E	15.49	16.24	0.610	0.639
E1	typ.	13.45	typ.	0.530
E2	4.31	5.48	0.170	0.216
E3	4.00		0.157	
e	5.46	BSC	0.215	BSC
L	19.80	20.30	0.780	0.799
L1	—	4.49	—	0.177
Ø P	3.55	3.65	0.140	0.144
Q	5.38	6.19	0.212	0.244
S	6.14 BSC		0.242 BSC	

X016d ISO247™
Weight = 4 g

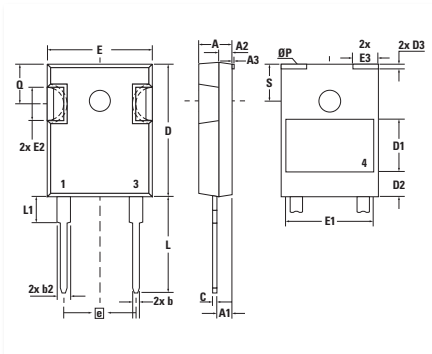


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
A3	typ.	0.05	typ.	0.002
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
C	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.844
D1	typ.	8.90	typ.	0.350
D2	typ.	2.90	typ.	0.114
D3	typ.	1.00	typ.	0.039
E	15.49	16.24	0.610	0.639
E1	typ.	13.45	typ.	0.530
E2	4.31	5.48	0.170	0.216
E3	typ.	4.00	typ.	0.157
e	10.92	BSC	0.430	BSC
L	19.80	20.30	0.780	0.799
L1	—	4.49	—	0.177
Ø P	3.55	3.65	0.140	0.144
Q	5.38	6.19	0.212	0.244
S	6.14	BSC	0.242	BSC

X016e ISO247™
Weight = # g

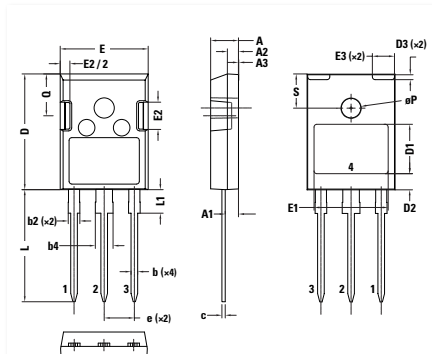

Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.21	0.185	0.205
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
A3	0.05		0.002	
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
c	0.38	0.89	0.015	0.035
D	20.80	21.45	0.819	0.844
D1	9.15		0.360	
D2	2.80		0.110	
D3	1.00		0.039	
E	15.49	16.24	0.610	0.639
E1	13.40		0.528	
E2	4.32	5.48	0.170	0.216
E3	4.00		0.157	
e	5.46		0.215	
L	19.81	20.30	0.780	0.799
L1	—	4.49	—	0.177
Q	7.36	7.76	0.290	0.306
Ø P	3.56	3.65	0.140	0.144
S	0.242		0.100	
W	0.004		0.10	


X016f ISO247™
Weight = # g

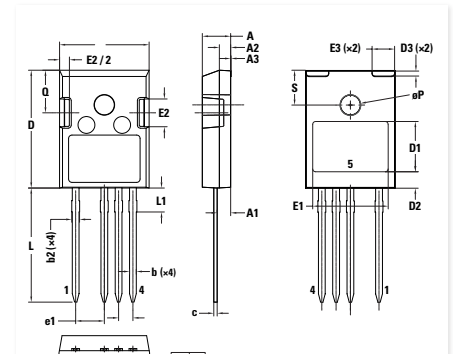

Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.21	0.185	0.205
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
A3	0.05		0.002	
b	0.99	1.40	0.039	0.055
b2	1.10	1.50	0.043	0.059
c	0.38	0.89	0.015	0.035
D	20.80	21.45	0.819	0.844
D1	9.15		0.360	
D2	2.80		0.110	
D3	1.00		0.039	
E	15.49	16.24	0.610	0.639
E1	13.40		0.528	
E2	4.32	5.48	0.170	0.216
E3	4.00		0.157	
e	2.54		0.100	
e1	5.08		0.200	
L	19.81	20.30	0.780	0.799
L1	—	4.49	—	0.177
Ø P	3.56	3.65	0.140	0.144
Q	7.36	7.76	0.290	0.306
S	6.15		0.242	
W	0.004		0.10	


Outline Drawings

X017a TO-3P
Weight = 5.5 g

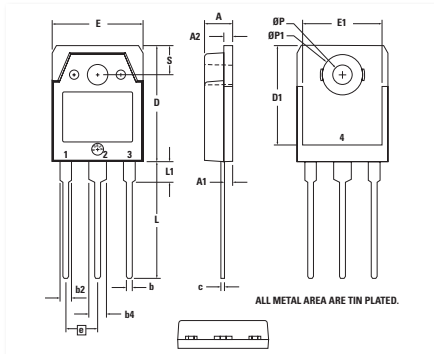


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	4.90	0.185	0.193
A1	1.30	1.50	0.051	0.059
A2	1.45	1.65	0.057	0.065
b	0.90	1.15	0.035	0.045
b2	1.90	2.20	0.075	0.087
b4	2.90	3.20	0.114	0.126
c	0.55	0.80	0.022	0.031
D	19.80	20.10	0.780	0.791
D1	16.90	17.20	0.665	0.677
E	15.50	15.80	0.610	0.622
E1	13.50	13.70	0.531	0.539
e	5.45 BSC		0.215 BSC	
L	19.80	20.20	0.780	0.795
L1	3.40	3.60	0.134	0.142
Ø P	3.20	3.40	0.126	0.134
Ø P1	6.90	7.10	0.272	0.280
S	4.90	5.10	0.193	0.201

X017b TO-3P
Weight = 5.5 g

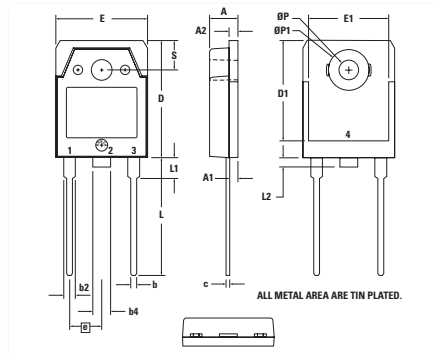


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	4.90	0.185	0.193
A1	1.30	1.50	0.051	0.059
A2	1.45	1.65	0.057	0.065
b	0.90	1.15	0.035	0.045
b2	1.90	2.20	0.075	0.087
b4	2.90	3.20	0.114	0.126
c	0.55	0.80	0.022	0.031
D	19.80	20.10	0.780	0.791
D1	16.90	17.20	0.665	0.677
E	15.50	15.80	0.610	0.622
E1	13.50	13.70	0.531	0.539
e	5.45 BSC		0.215 BSC	
L	19.80	20.20	0.780	0.795
L1	3.40	3.60	0.134	0.142
L2	0.00	1.40	0.000	0.055
Ø P	3.20	3.40	0.126	0.134
Ø P1	6.90	7.10	0.272	0.280
S	4.90	5.10	0.193	0.201

X017c TO-3PFP
Weight = 5.5 g

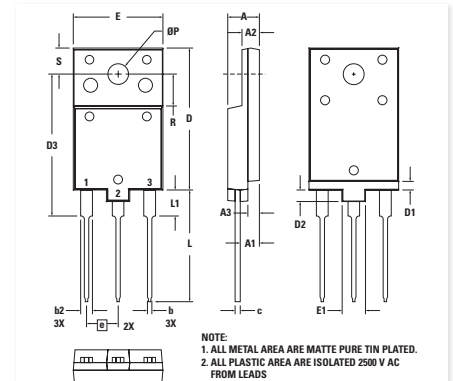


Dim	Millimeters		Inches	
	min	max	min	max
A	5.40	5.80	0.213	0.228
A1	3.10	3.50	0.122	0.138
A2	2.90	3.30	0.114	0.130
A3	1.90	2.30	0.075	0.091
b	0.65	0.95	0.026	0.037
b2	1.90	2.30	0.075	0.091
c	0.80	1.10	0.031	0.043
D	24.30	24.70	0.957	0.972
D1	1.30	1.70	0.051	0.067
D2	1.80	2.2	0.071	0.087
E	15.40	15.80	0.606	0.622
E1	3.90	4.30	0.154	0.169
e	5.45 BSC		0.215 BSC	
L	19.00	19.50	0.748	0.768
L1	4.30	4.70	0.169	0.185
Ø P	3.40	3.80	0.134	0.150
R	5.30	5.70	0.209	0.224
S	4.30	4.70	0.169	0.185

X017d TO-3PFP
Weight = 5.4 g

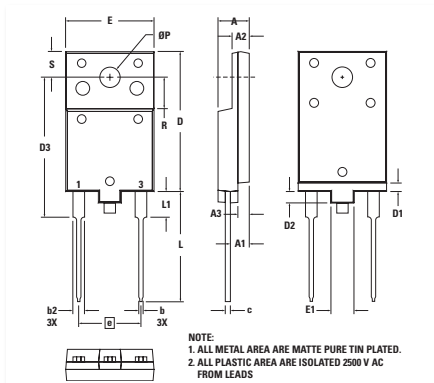


Dim	Millimeters		Inches	
	min	max	min	max
A	5.40	5.80	0.213	0.228
A1	3.10	3.50	0.122	0.138
A2	2.90	3.30	0.114	0.130
A3	1.90	2.30	0.075	0.091
b	0.65	0.95	0.026	0.037
b2	1.90	2.30	0.075	0.091
c	0.80	1.10	0.031	0.043
D	24.30	24.70	0.957	0.972
D1	1.30	1.70	0.051	0.067
D2	1.80	2.2	0.071	0.087
E	15.40	15.80	0.606	0.622
E1	3.90	4.30	0.154	0.169
e	5.45 BSC		0.215 BSC	
L	19.00	19.50	0.748	0.768
L1	4.30	4.70	0.169	0.185
Ø P	3.40	3.80	0.134	0.150
R	5.30	5.70	0.209	0.224
S	4.30	4.70	0.169	0.185

X018 TO-268 I3PAK
Weight = 4.5 g

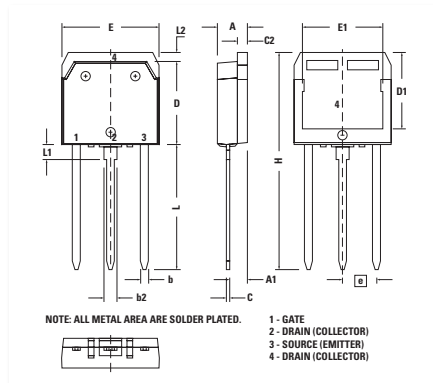


Dim	Millimeters		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.70	2.90	0.106	0.114
b	1.15	1.45	0.045	0.057
b2	1.90	2.10	0.075	0.083
C	0.40	0.65	0.016	0.026
C2	1.45	1.60	0.057	0.063
D	13.80	14.00	0.543	0.551
D1	12.40	12.70	0.488	0.500
E	15.85	16.05	0.624	0.632
E1	13.30	13.60	0.524	0.535
e	5.45 BSC		0.215 BSC	
H	34.67	35.43	1.365	1.395
L	19.81	20.32	0.780	0.800
L1	2.00	2.30	0.079	0.091
L2	1.00	1.15	0.039	0.045

X019 TO-268 AA (D3PAK)
Weight = 4 g

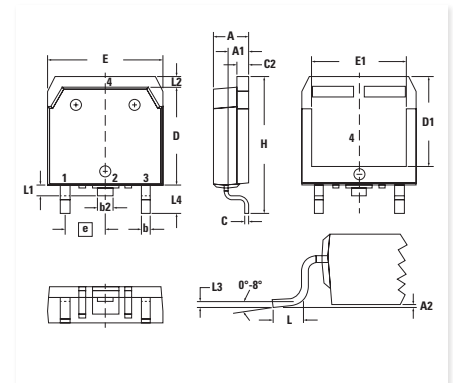


Dim	Millimeters		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.70	2.90	0.106	0.114
A2	0.02	0.25	0.001	0.100
b	1.15	1.45	0.045	0.057
b2	1.90	2.10	0.075	0.083
C	0.40	0.65	0.016	0.026
C2	1.45	1.60	0.057	0.063
D	13.80	14.00	0.543	0.551
D1	12.40	12.70	0.488	0.500
E	15.85	16.05	0.624	0.632
E1	13.30	13.60	0.524	0.535
e	5.45 BSC		0.215 BSC	
H	18.70	19.10	0.736	0.752
L	2.40	2.70	0.094	0.106
L1	1.20	1.40	0.047	0.055
L2	1.00	1.15	0.039	0.045
L3	2.54 BSC		0.100 BSC	
L4	3.80	4.10	0.150	0.161

X019a TO-268 AA (D3PAK HV)
Weight = 4 g

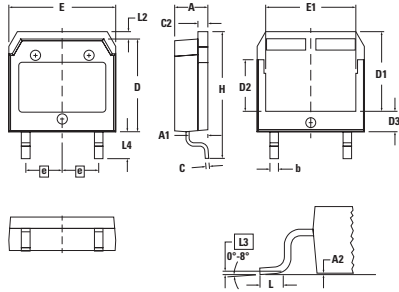


Dim	Millimeters		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.70	2.90	0.106	0.114
A2	0.02	0.25	0.001	0.100
b	1.15	1.45	0.045	0.057
C	0.40	0.65	0.016	0.026
C2	1.45	1.60	0.057	0.063
D	13.80	14.00	0.543	0.551
D1	11.80	12.10	0.465	0.476
D2	7.50	7.80	0.295	0.307
D3	2.90	3.20	0.114	0.126
E	15.85	16.05	0.624	0.632
E1	13.30	13.60	0.524	0.535
e	5.45 BSC		0.215 BSC	
H	18.70	19.10	0.736	0.752
L	1.70	2.00	0.067	0.079
L2	1.00	1.15	0.039	0.045
L3	0.25 BSC		0.010 BSC	
L4	3.80	4.10	0.150	0.161

X020a TO-264 AA
Weight = 10 g

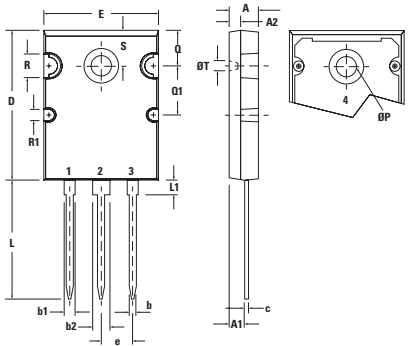


Dim	Millimeters		Inches	
	min	max	min	max
A	4.82	5.13	0.190	0.202
A1	2.54	2.89	0.100	0.114
A2	2.00	2.10	0.079	0.083
b	1.12	1.42	0.044	0.056
b2	2.90	3.09	0.114	0.122
c	0.53	0.83	0.021	0.033
D	25.91	26.16	1.020	1.030
E	19.81	19.96	0.780	0.786
e	5.45 BSC		0.215 BSC	
J	0.00	0.25	0.000	0.010
K	0.00	0.25	0.000	0.010
L	20.32	20.83	0.800	0.820
L1	2.29	2.59	0.090	0.102
P	3.17	2.66	0.125	0.144
Q	6.07	6.27	0.239	0.247
Q1	8.38	8.69	0.330	0.342
R	3.81	4.32	0.150	0.170
R1	1.78	2.29	0.070	0.090
S	6.04	6.30	0.238	0.248
T	1.57	1.83	0.062	0.072

X021a PLUS264™
Weight = 10 g

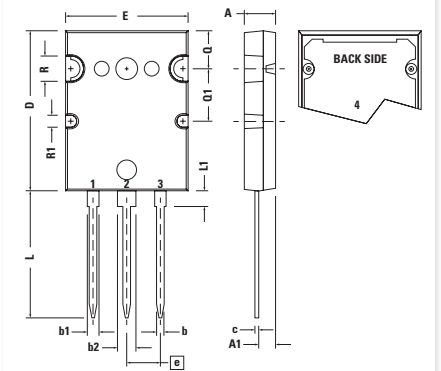


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.31	0.185	0.209
A1	2.59	3.00	0.102	0.118
b	0.94	1.40	0.037	0.055
b1	2.21	2.59	0.087	0.102
b2	2.79	3.20	0.110	0.126
c	0.43	0.74	0.017	0.029
D	25.58	26.59	1.007	1.047
E	19.30	20.29	0.760	0.799
e	5.45 BSC		0.215 BSC	
L	19.79	21.39	0.779	0.842
L1	2.21	2.59	0.087	0.102
Q	6.10	6.50	0.240	0.256
Q1	8.38	8.79	0.330	0.346
ØR	3.94	4.75	0.155	0.187
ØR1	2.16	2.36	0.085	0.093

X022a ISOPLUS264™
Weight = 7.5 g

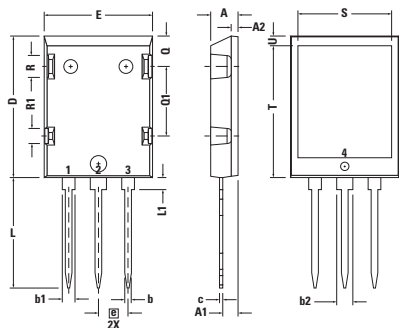


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	1.40	0.046	0.055
b	1.14	1.40	0.045	0.055
b1	1.60	1.83	0.063	0.072
b2	2.54	2.79	0.100	0.110
b3	1.47	1.73	0.058	0.068
c	0.51	0.74	0.020	0.029
D	25.91	26.42	1.020	1.040
E	19.56	20.29	0.770	0.799
e	3.81 BSC		0.150 BSC	
L	19.81	21.83	0.780	0.820
L1	2.03	2.59	0.080	0.102
Q	5.33	5.97	0.210	0.235
Q1	12.45	13.03	0.490	0.513
R	3.81	4.57	0.150	0.180
R1	2.54	3.30	0.100	0.130
S	16.97	17.53	0.668	0.690
T	20.34	20.85	0.801	0.821
U	1.65	2.03	0.065	0.080

X022 ISOPLUS264™
Weight = 7.5 g

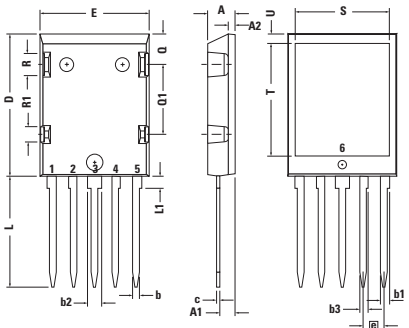

Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	1.40	0.046	0.055
b	1.14	1.40	0.045	0.055
b1	1.60	1.83	0.063	0.072
b2	2.54	2.79	0.100	0.110
b3	1.47	1.73	0.058	0.068
c	0.51	0.74	0.020	0.029
D	25.91	26.42	1.020	1.040
E	19.56	20.29	0.770	0.799
e	3.81 BSC		0.150 BSC	
L	19.81	21.83	0.780	0.820
L1	2.03	2.59	0.080	0.102
Q	5.33	5.97	0.210	0.235
Q1	12.45	13.03	0.490	0.513
R	3.81	4.57	0.150	0.180
R1	2.54	3.30	0.100	0.130
S	16.97	17.53	0.668	0.690
T	20.34	20.85	0.801	0.821
U	1.65	2.03	0.065	0.080


X024a ISOPLUS i4-PAC™
Weight = 6 g

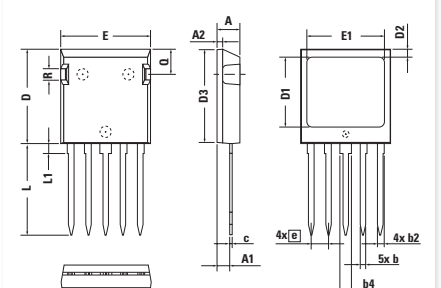

Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
b4	2.54	2.79	0.100	0.110
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	3.81 BSC		0.150 BSC	
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	-	0.10	-	0.004


Outline Drawings

X024b ISOPLUS i4-PAC™
Weight = 5.5 g

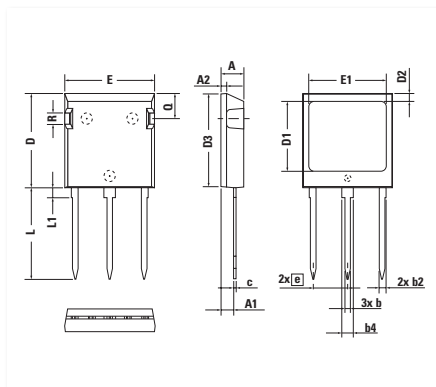


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
b4	2.54	2.79	0.100	0.110
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	762 BSC		0.300 BSC	
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	—	0.10	—	0.004

X024c ISOPLUS i4-PAC™
Weight = 5.5 g

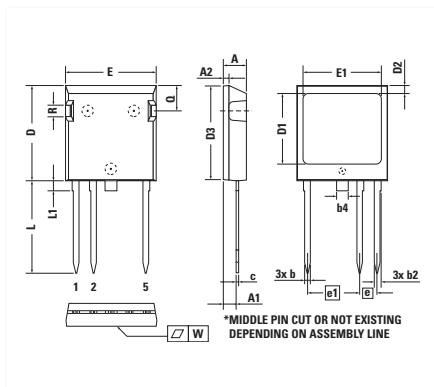


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
b4*	2.54	2.79	0.100	0.110
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	3.81 BSC		0.150 BSC	
e1	11.43 BSC		0.450 BSC	
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	—	0.10	—	0.004

X024d ISOPLUS i4-PAC™
Weight = 6 g

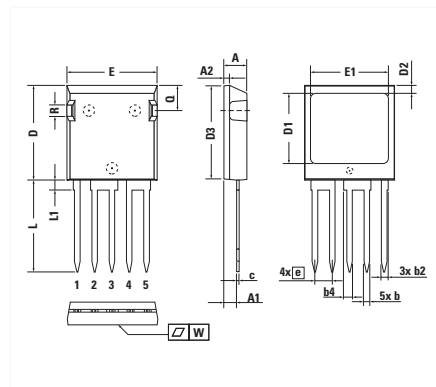


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	3.81 BSC		0.150 BSC	
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	—	0.10	—	0.004

X024e ISOPLUS i4-PAC™
Weight = 6 g

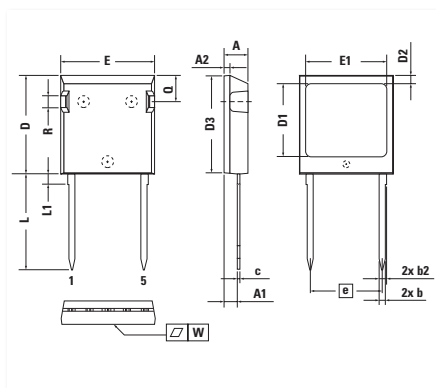


Dim	Millimeters		Inches	
	min	max	min	max
A	4.83	5.21	0.190	0.205
A1	2.59	3.00	0.102	0.118
A2	1.17	2.16	0.046	0.085
b	1.14	1.40	0.045	0.055
b2	1.47	1.73	0.058	0.068
c	0.51	0.74	0.020	0.029
D	20.80	21.34	0.819	0.840
D1	14.99	15.75	0.590	0.620
D2	1.65	2.03	0.065	0.080
D3	20.30	20.70	0.799	0.815
E	19.56	20.29	0.770	0.799
E1	16.76	17.53	0.660	0.690
e	15.24 BSC		0.600 BSC	
L	19.81	21.34	0.780	0.840
L1	2.11	2.59	0.083	0.102
Q	5.33	6.20	0.210	0.244
R	2.54	4.57	0.100	0.180
W	—	0.10	—	0.004

X025a GBFP
Weight = 7 g

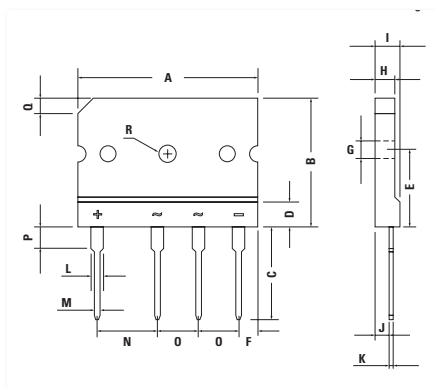

Dim	Millimeters		Inches	
	min	max	min	max
A	29.70	30.30	1.170	1.194
B	19.70	20.30	0.776	0.800
C	17.00	18.00	0.670	0.709
D	4.70	4.90	0.185	0.193
E	10.80	11.20	0.426	0.441
F	2.30	2.70	0.091	0.106
G	3.10	3.40	0.122	0.134
H	3.40	3.80	0.134	0.150
I	4.40	4.80	0.173	0.189
J	2.50	2.90	0.099	0.114
K	0.60	0.80	0.024	0.032
L	2.00	2.40	0.079	0.095
M	0.90	1.10	0.035	0.043
N	9.80	10.20	0.386	0.402
O	7.30	7.70	0.288	0.303
P	3.80	4.20	0.150	0.165
Q	(3.0) × 45°		(0.118) × 45°	
Ø R	3.1	3.4	0.122	0.134


X025b GUPF
Weight = 8.5 g

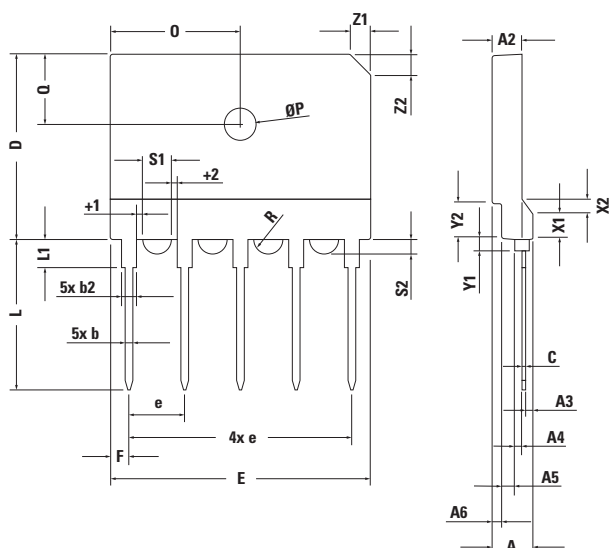


Dim	Millimeters			Inches		
	min	typ.	max	min	typ.	max
A	5.40	5.50	5.60	0.213	0.217	0.221
A2	3.90	4.00	4.10	0.154	0.158	0.162
A3	0.95	1.00	1.10	0.037	0.039	0.043
A4	0.95	1.00	1.05	0.037	0.039	0.041
A5	1.60	1.70	1.80	0.063	0.067	0.071
A6	1.25	1.30	1.35	0.049	0.051	0.053
b	0.95	1.00	1.05	0.037	0.039	0.041
b2	1.95	2.00	2.05	0.077	0.079	0.081
C	0.45	0.50	0.55	0.018	0.020	0.022
D	24.80	25.00	25.20	0.977	0.985	0.993
E	34.70	35.00	35.30	1.367	1.379	1.391
e	BSC	750	—	BSC	0.296	—
F	2.40	2.50	2.60	0.095	0.099	0.102
L	2.30	20.40	2.50	0.091	0.804	0.099
L1	3.70	3.75	3.80	0.146	0.148	0.150
O	17.40	17.50	17.60	0.686	0.690	0.693
$\varnothing P$	4.10	4.20	4.30	0.162	0.165	0.169
Q	9.20	9.30	9.40	0.362	0.366	0.370
$\varnothing/2 R$	—	1.77	—	—	0.070	—
s1	3.45	3.50	3.55	0.136	0.138	0.140
s2	1.45	1.50	1.55	0.057	0.059	0.061
t1	0.95	1.00	1.05	0.037	0.039	0.041
t2	0.95	1.00	1.05	0.037	0.039	0.041
x1	3.20	3.30	3.40	0.126	0.130	0.134
x2	1.90	2.00	2.10	0.075	0.079	0.083
y1	1.60	1.65	1.70	0.063	0.065	0.067
y2	4.65	4.70	4.75	0.183	0.185	0.187
z1	2.80	2.90	3.00	0.110	0.114	0.118

Outline Drawings


X026c ISOPLUS™-DIL (SMD)
Weight = 13 g

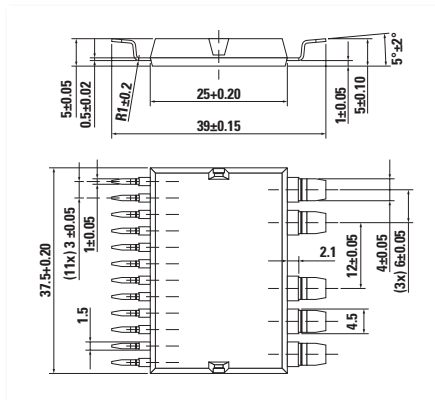

X026d ISOPLUS™-DIL (SMD)
Weight = 13 g

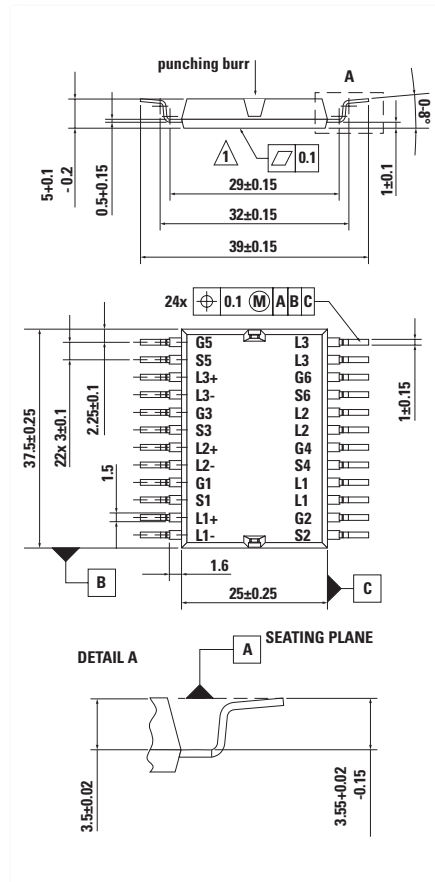


X027a SOT-227 B miniBLOC
Weight = 29 g

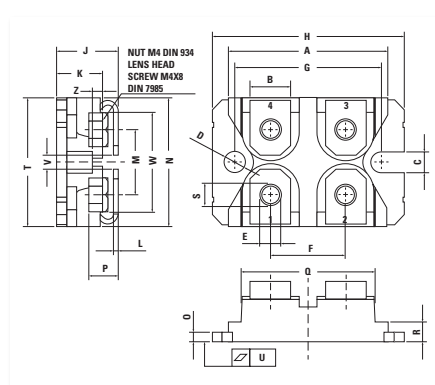


Dim	Millimeters		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106

X028 ISOPLUS227™
Weight = 19 g

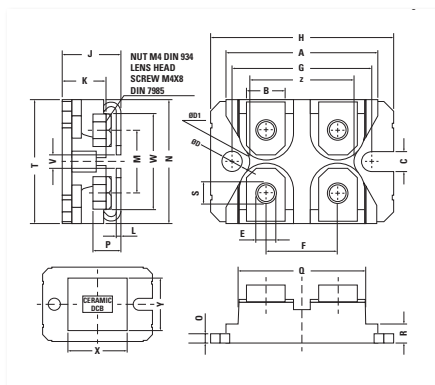

Dim	Millimeters		Inches	
	min	max	min	max
A	31.50	32.26	1.240	1.270
B	7.87	8.38	0.310	0.330
C	3.94	4.19	0.155	0.165
D	3.94	4.19	0.155	0.165
D1	3.81	3.98	0.150	0.157
E	4.06	4.27	0.160	0.168
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.489	1.505
J	11.81	12.22	0.465	0.481
K	9.40	9.65	0.370	0.380
L	0.76	0.84	0.030	0.033
M	12.60	12.85	0.496	0.506
N	25.15	25.42	0.990	1.001
O	2.54	2.64	0.100	0.105
P	4.95	5.97	0.195	0.235
Q	26.54	26.90	1.045	1.059
R	4.06	4.32	0.160	0.170
S	4.72	4.85	0.186	0.191
T	24.59	25.07	0.968	0.987
U	-0.03	0.05	-0.001	0.002
V	3.30	4.06	0.130	0.160
W	19.81	21.08	0.780	0.830
X	19.56	20.57	0.770	0.810
Y	17.27	18.29	0.680	0.720
Z	22.48	22.66	0.885	0.892


X030a SMPD-B
Weight = 8.5 g

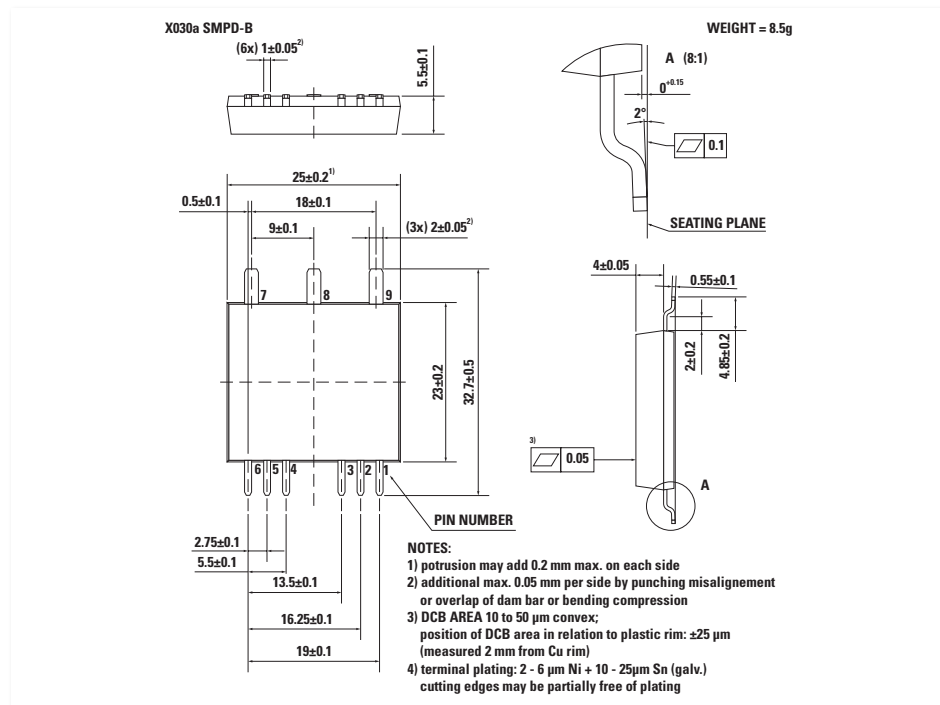

X031...* SMPD- x

Weight = 8.5 g*


* See data sheet for pin arrangement

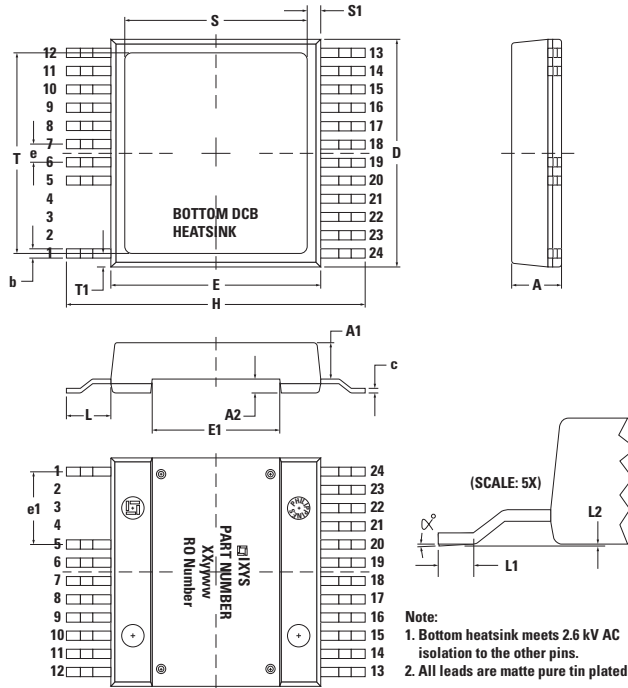

Dim	Millimeters		Inches	
	min	max	min	max
A	5.30	5.70	0.209	0.224
A1	3.90	4.10	0.154	0.161
A2	1.40	1.60	0.055	0.063
b	0.90	1.15	0.035	0.045
c	0.45	0.65	0.018	0.026
D	24.80	25.25	0.976	0.994
E	22.80	23.25	0.898	0.915
E1	13.80	14.20	0.543	0.559
e	2.00	BSC	0.079	BSC
e1	8.00	BSC	0.315	BSC
H	32.30	33.30	1.272	1.311
L	4.60	5.30	0.181	0.209
L1	1.30	1.70	0.051	0.067
L2	0.00	0.15	0.000	0.006
S	18.85	20.12	0.742	0.792
S1	1.45	2.08	0.057	0.082
T	20.90	22.17	0.823	0.873
T1	1.42	2.03	0.056	0.080
a	4°	—	4°	—

X032...* MiniSMPD- x

* See data sheet for pin arrangement

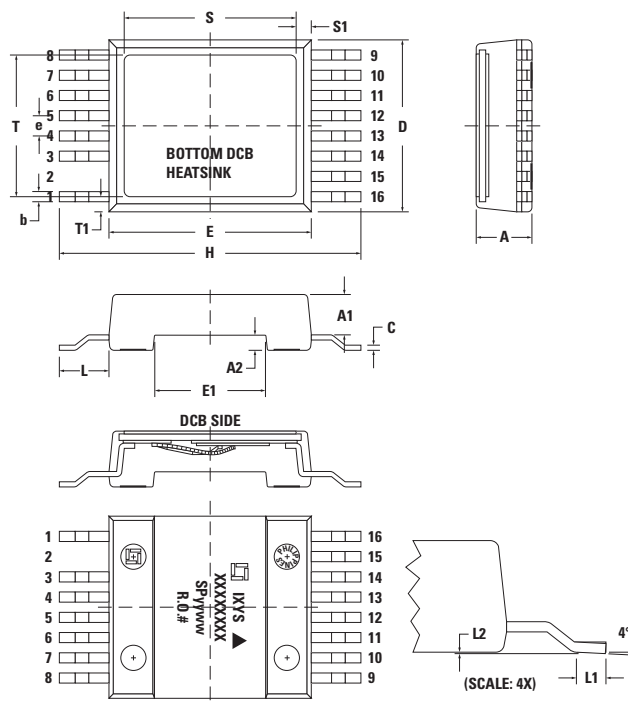


Dim	Millimeters		Inches	
	min	max	min	max
A	5.30	5.70	0.209	0.224
A1	3.90	4.10	0.154	0.161
A2	1.40	1.60	0.055	0.063
b	0.90	1.15	0.035	0.045
c	0.45	0.65	0.018	0.026
D	16.80	17.20	0.661	0.677
E	19.80	20.20	0.780	0.795
E1	10.80	11.20	0.425	0.441
e	2.00 BSC		0.079 BSC	
H	29.50	30.10	1.161	1.185
L	4.60	5.30	0.181	0.209
L1	1.30	1.70	0.051	0.067
L2	0.00	0.15	0.000	0.006
S	16.80	17.20	0.661	0.677
S1	1.30	1.70	0.051	0.067
T	13.80	14.20	0.543	0.559
T1	1.30	1.70	0.051	0.067


Note:

1. All leads are matte pure tin plated.
2. Cu surface of bottom DCB is pre-Ni plated unless otherwise.
3. Cu surface of bottom DCB is electrically isolated 2.500V AC from all other leads.
4. Unless other specified, pin out are as follows:
Pin #1 - Gate
Pin #3 - Gate return or source
Pin #4 through #8 - Source (emitter)
Pin #9 through #16 - Drain (collector)


* See data sheet for pin arrangement

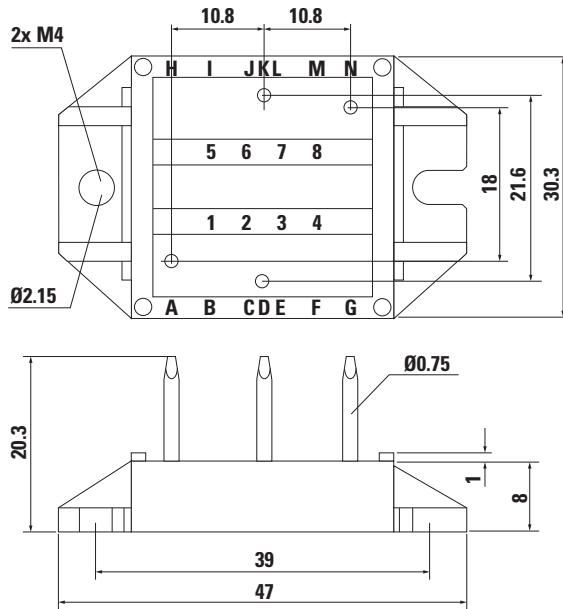

* See data sheet for pin arrangement

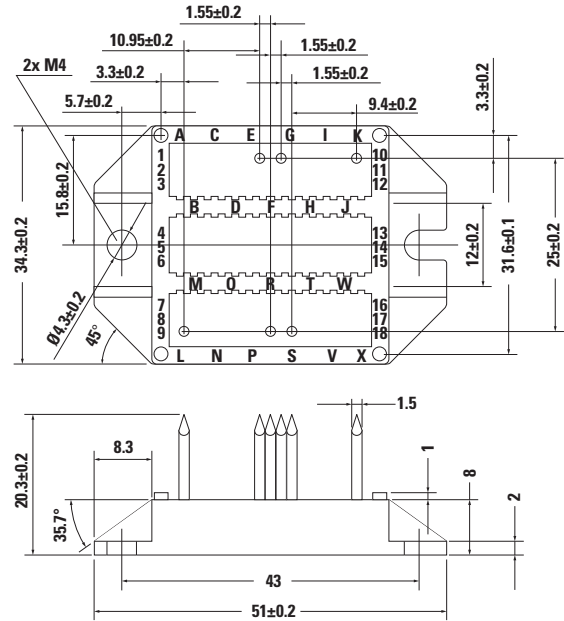


* See data sheet for pin arrangement

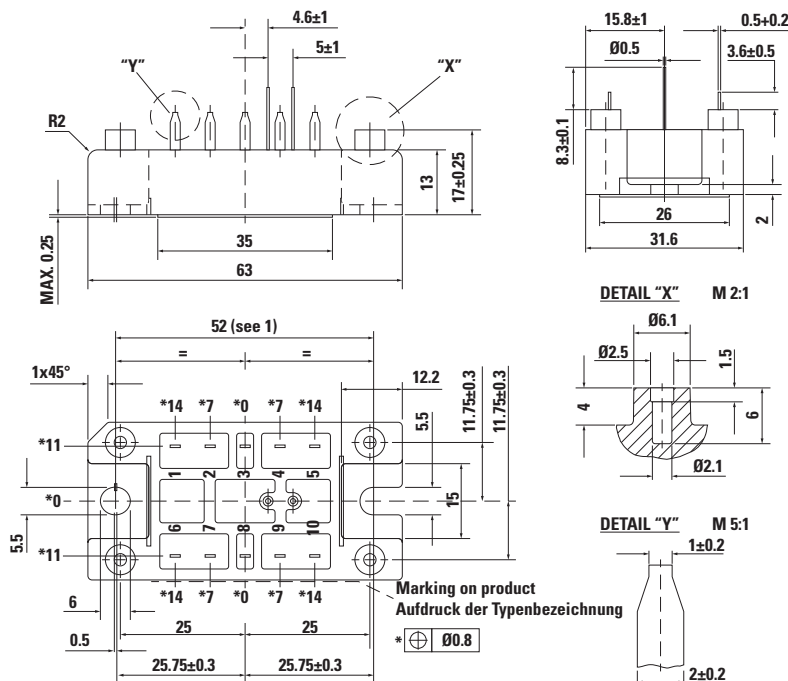

X104 V2-Pack

Weight = 76 g


* See data sheet for pin arrangement

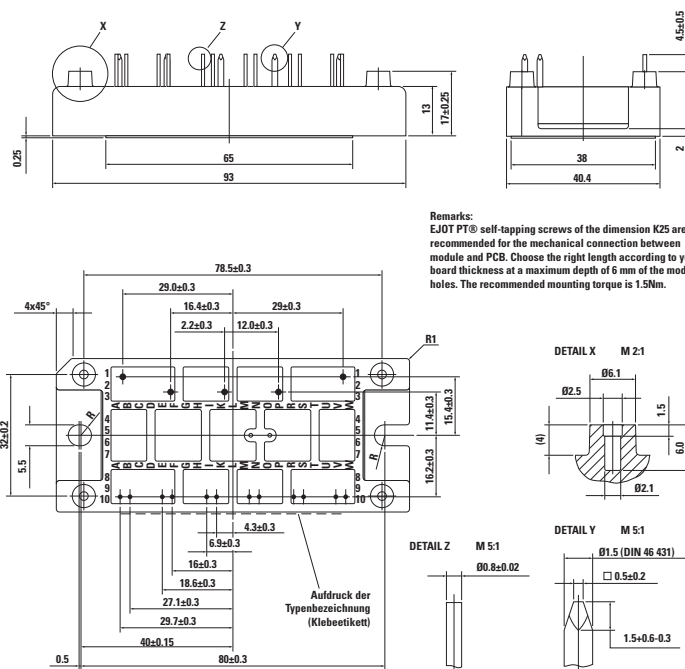

X105 V1-B-Pack

a: pin length = 31 mm
b: pin length = 16 mm


Weight = 30 g
Weight = 28 g

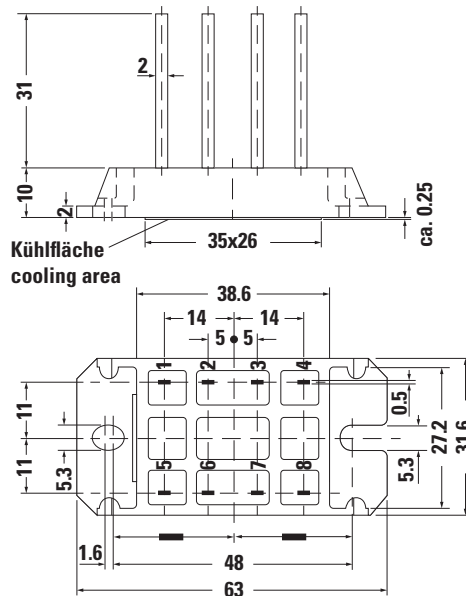

X105c V1-B-Pack


Weight = 25 g

* See data sheet for pin arrangement

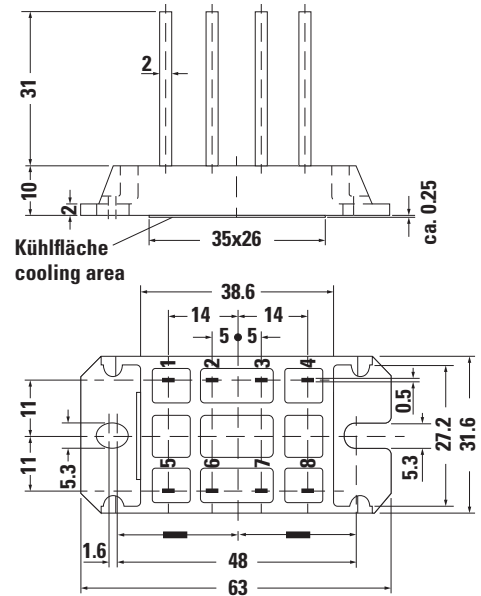


X112 E2-Pack Weight = 176 g

* See data sheet for pin arrangement

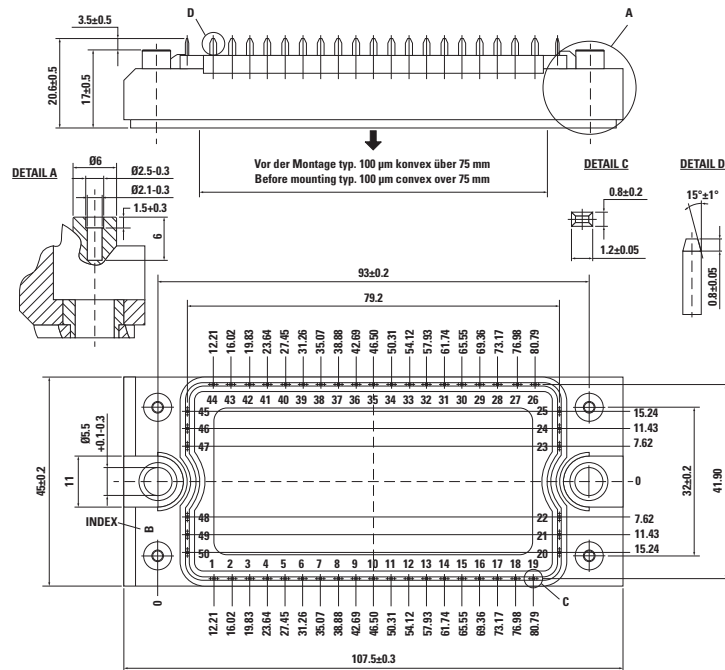

X112a E2-Pack PFP Weight = 176 g


* See data sheet for pin arrangement

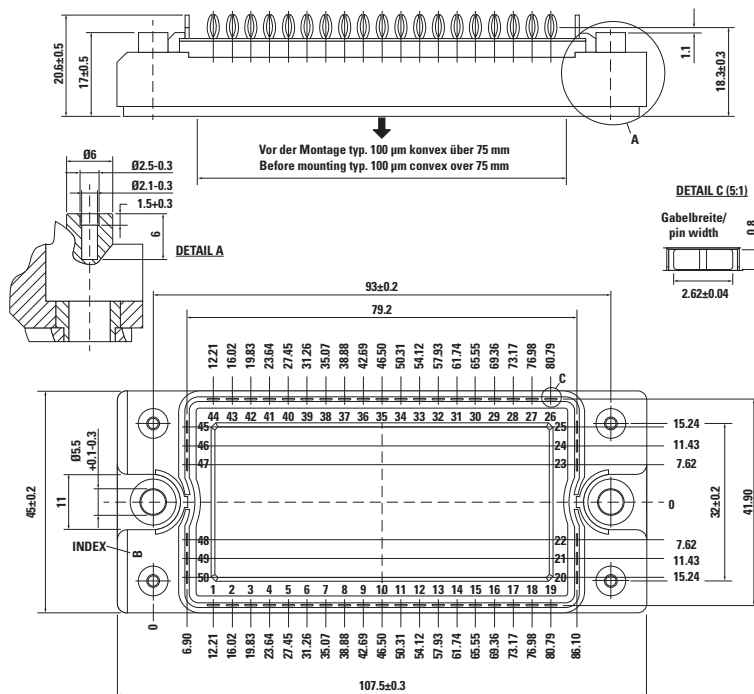

X113 E3-Pack

Weight = 270 g


* See data sheet for pin arrangement

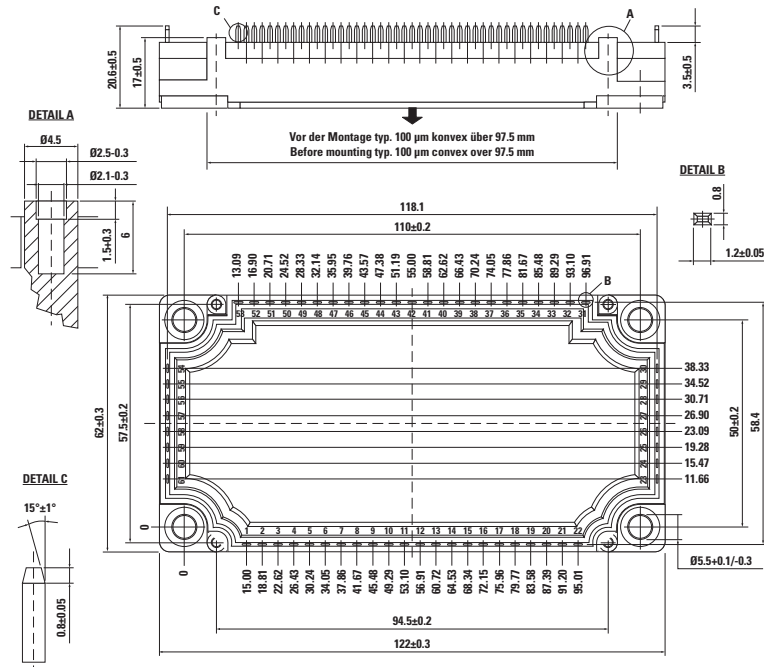


X113a E3-Pack PFP

Weight = 270 g

* See data sheet for pin arrangement

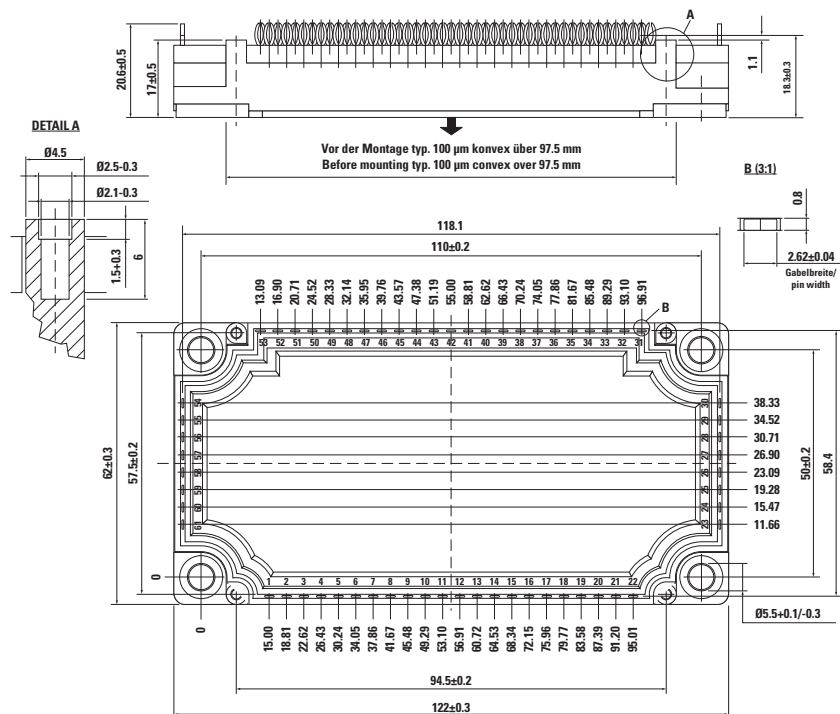


FO-A
= 15 g

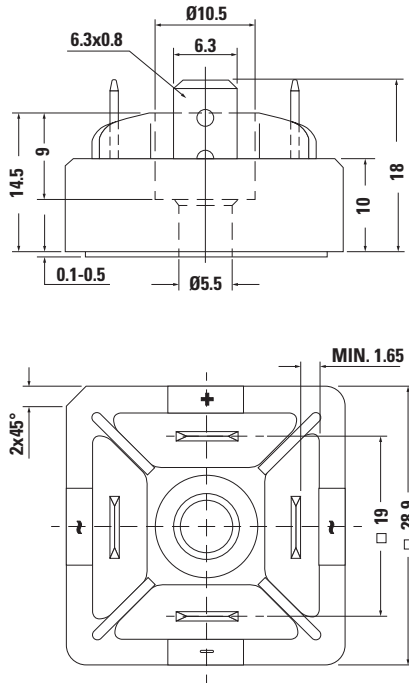

X116 FO-B

a: VUO
b: w/o terminal C (VBO)

Weight = 20 g
Weight = 19 g

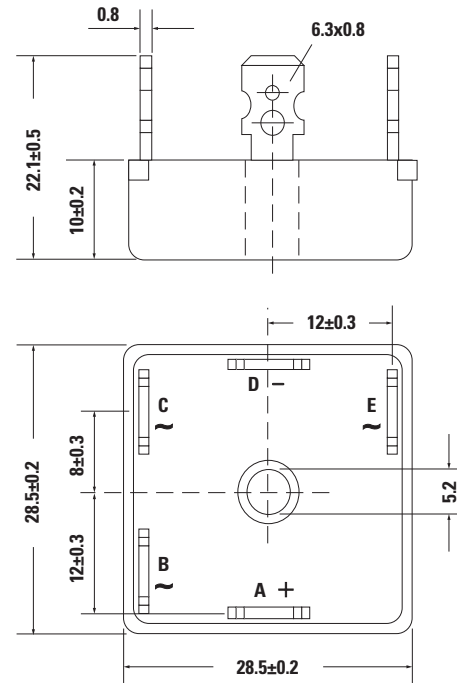

X122 PWS-D



a: VUO
b: w/o terminal C (VBO)

Weight = 159 g
Weight = 153 g

X122 PWS-D Flat

c: VUO


Weight = 118 g

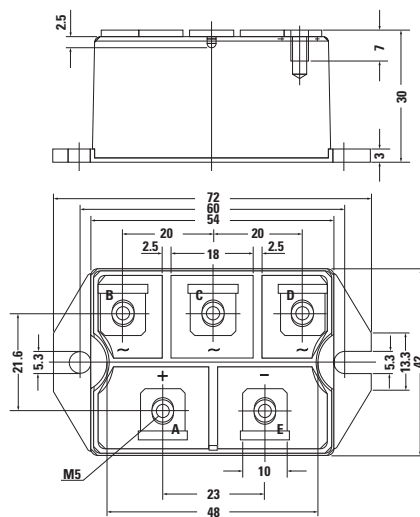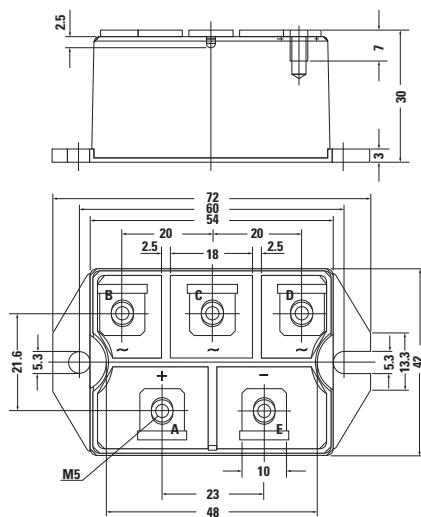

X123 PWS-E

a: VTO
b: w/o terminal 4, 5 & 6 (VVZ)
c: w/o terminal 1, 2, 3, 4, 5 & 6 (VUO)
d: w/o terminal D, 3, 4, 5 & 6 (VHF)
e: w/o terminal D, 1, 2, 3, 4, 5 & 6 (VBO)


Weight = 284 g
Weight = 284 g
Weight = 284 g
Weight = 273 g
Weight = 273 g

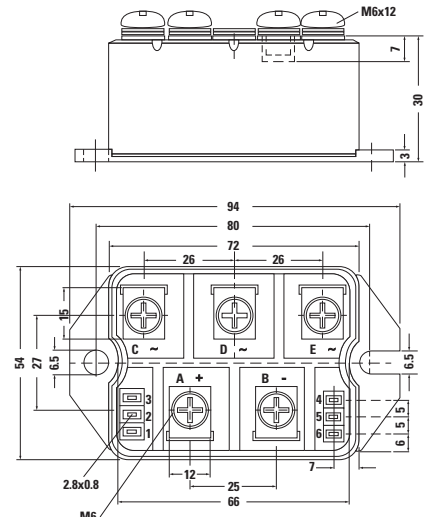

X123 PWS-E Flat

w/o terminal 1, 2, 3, 4, 5 & 6 (VUO)

Weight = 159 g

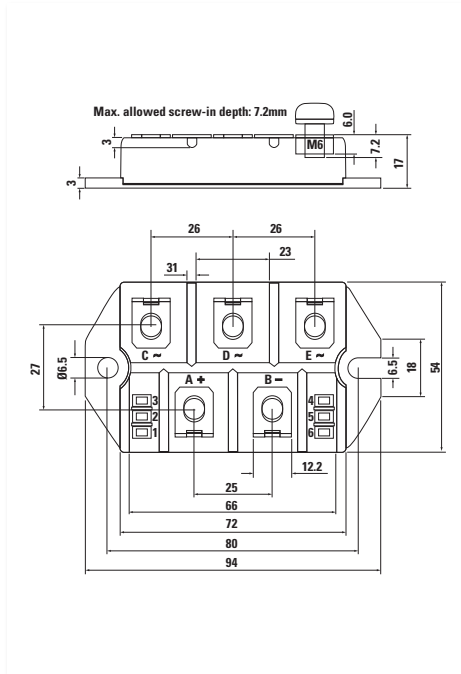


X125 TO-240AA

a, z: + Kelvin contact (MCC)
b, y: + Kelvin contact, w/o pin 6 & 7 (MCD)
c: w/o Kelvin contact 4 & 7 (MCC)

Weight = 81 g
Weight = 81 g
Weight = 81 g

d: w/o Kelvin contact 4, 7 & pin 6 (MCD)
e: w/o terminal D, 1, 2, 3, 4, 5 & 6 (VBO)
y, z: w/o metal inserts


Weight = 81 g
Weight = 81 g

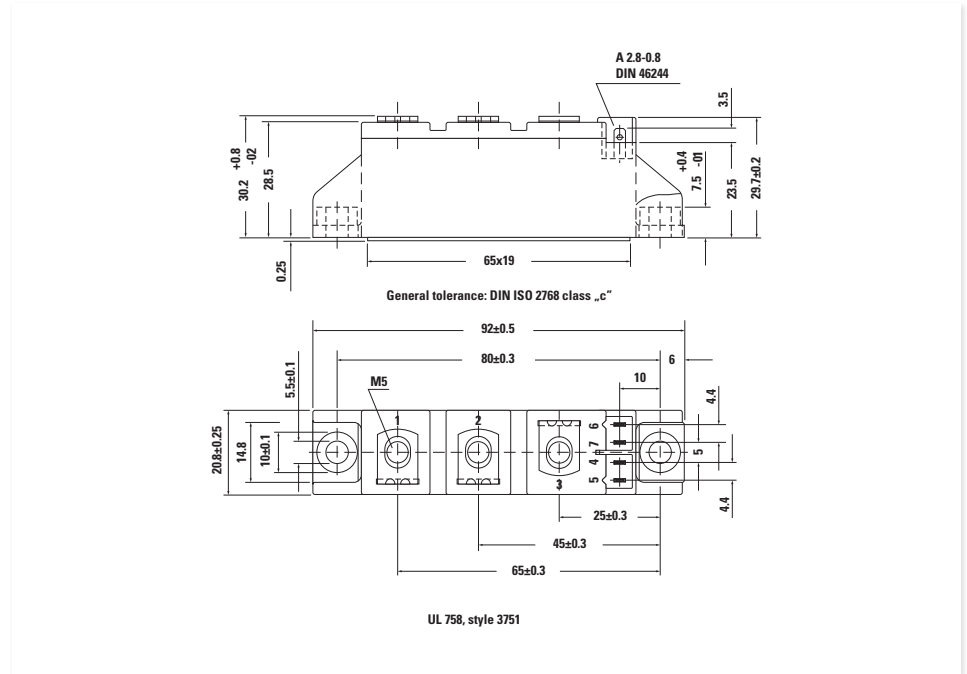

X126 Y4-M6

a, z: + Kelvin cont., w/o pin 8 up to 11 (MCC)
b, y: + Kelvin cont., w/o pin 6 up to 11 (MCD)
c: w/o pin 4 up to 11 (MDD)
d: w/o terminal 2 & pin 4 up to 11 (MEO)
y, z: with metal inserts

Weight = 131 g
Weight = 131 g
Weight = 126 g
Weight = 108 g

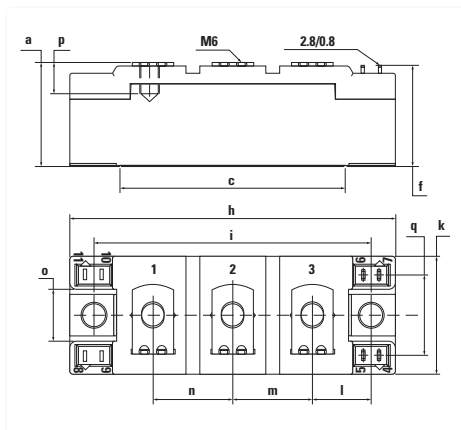


Dim	Millimeters		Inches	
	min	max	min	max
a	30.0	30.6	1.181	1.205
c	64.0	65.0	2.520	2.559
f	28.6	29.2	1.126	1.150
h	93.5	94.5	3.681	3.720
i	79.5	80.5	3.130	3.169
j	4.8	5.2	0.189	0.205
k	33.4	34.0	1.315	1.339
l	16.7	17.3	0.657	0.681
m	22.7	23.3	0.894	0.917
n	22.7	23.3	0.894	0.917
o	14.0	15.0	0.551	0.591
p	typ. 10.5		typ. 0.413	
q	22.8	23.3	0.898	0.917

X127 Y4-M5

a: w/o pin 8 up to 11 (MII)
b: w/o pin 6 up to 11 (MID)
c: w/o pin 4, 5 & 8 up to 11 (MDI)


Weight = 110 g
Weight = 108 g
Weight = 108 g

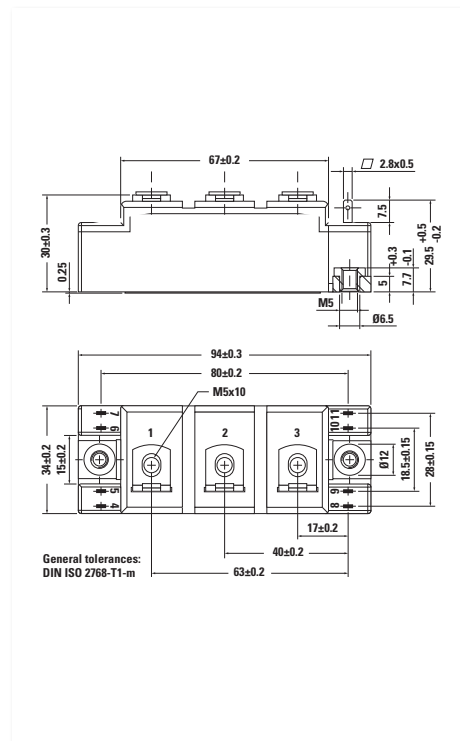

X127 Y4-M5-A

d: w/o pin 8 up to 11 (..PF.)
e: w/o pin 6 up to 11 (..RF.)
f: w/o pin 4, 5 & 8 up to 11 (..QF..)

Weight = 170 g
Weight = 168 g
Weight = 166 g

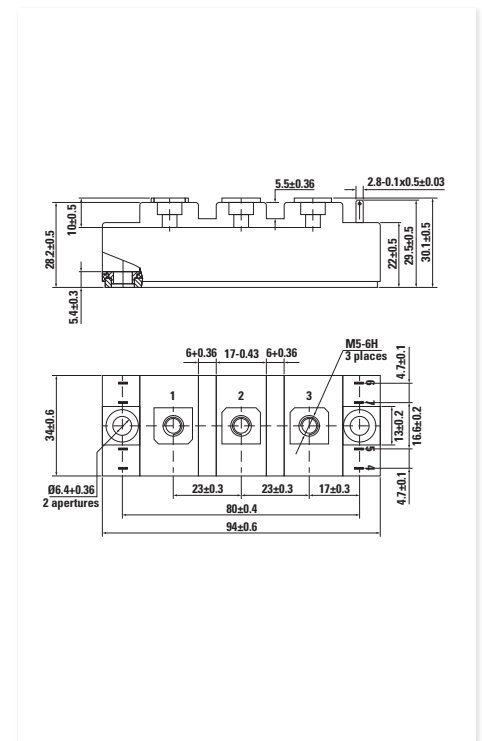


Outline Drawings

X129 Y2-DCB

- a: + Kelvin contact (MCC)
b: + Kelvin contact, w/o pin 6 & 7 (MCD)
c: w/o pin 4, 5, 6 & 7 (MDD)


Weight = 245 g
Weight = 245 g
Weight = 244 g

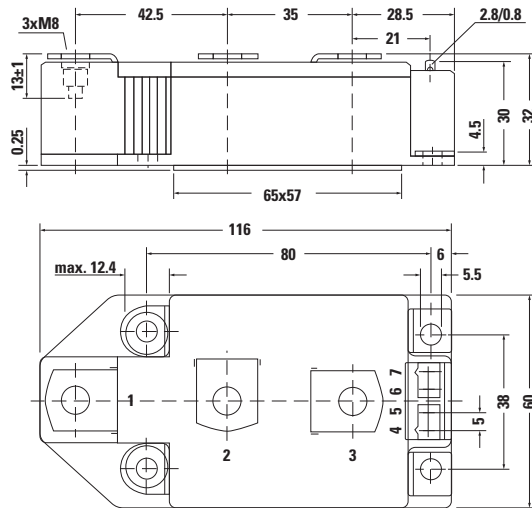

X131 Y1-CU

- a: + Kelvin contact (MCC)
b: + Kelvin contact, w/o pin 6&7 (MCD)
c: w/o pin 4, 5, 6 & 7 (MDD)


Weight = 680 g
Weight = 680 g
Weight = 680 g

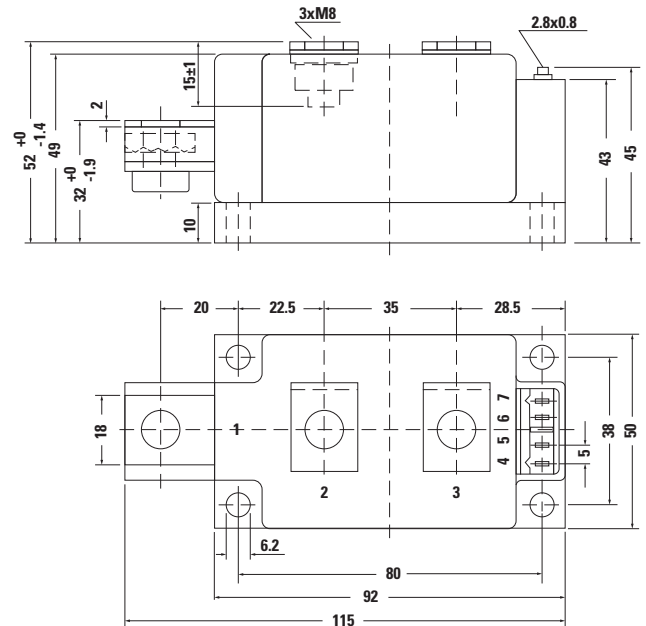

X132 Y1-2-CU

- a: + Kelvin contact w/o pin 6&7 (MCO)
b: w/o pin 4, 5, 6 & 7 (MDO)


Weight = 650 g

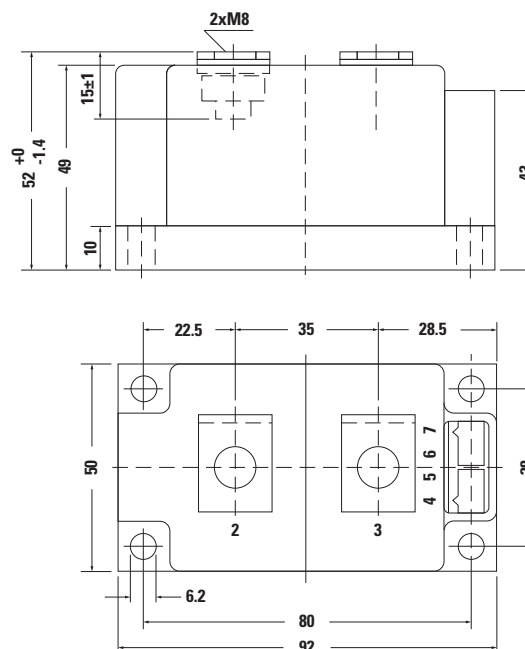

X141 SimBus A

a: + Kelvin contact (MCC)
b: + Kelvin contact, w/o pin 7 & 8 (MCD)
c: w/o pin 5, 6, 7 & 8 (MDD)


Weight = 152 g

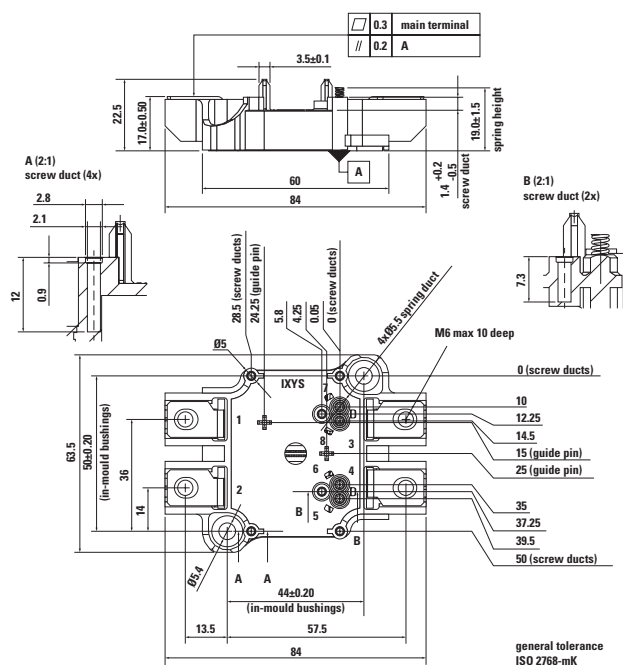

X142 ComPack


a: + Kelvin contact (MCC)
b: + Kelvin contact, w/o pin 6 & 7 (MCD)
c: w/o pin 4, 5, 6 & 7 (MDD)

Weight = 500 g

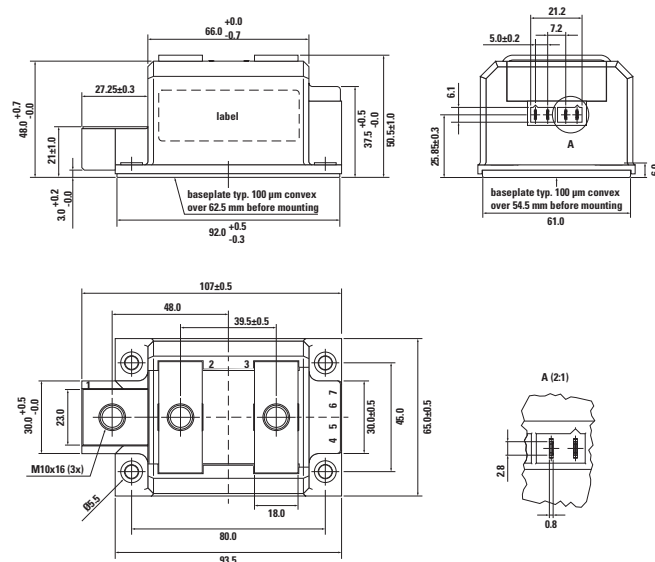


X143 SimBus F
Weight = 150 g

* See data sheet for pin arrangement

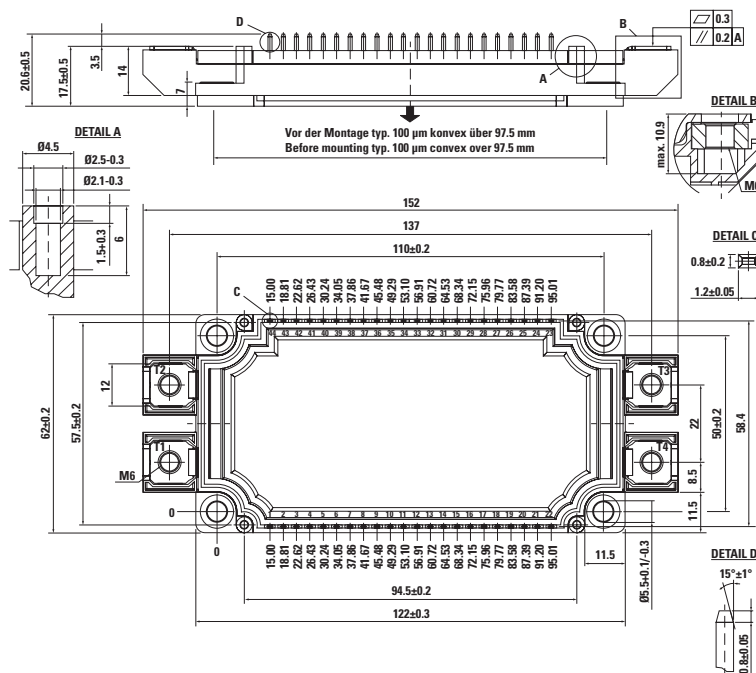


X143a SimBus F PFP Weight = 150 g


* See data sheet for pin arrangement

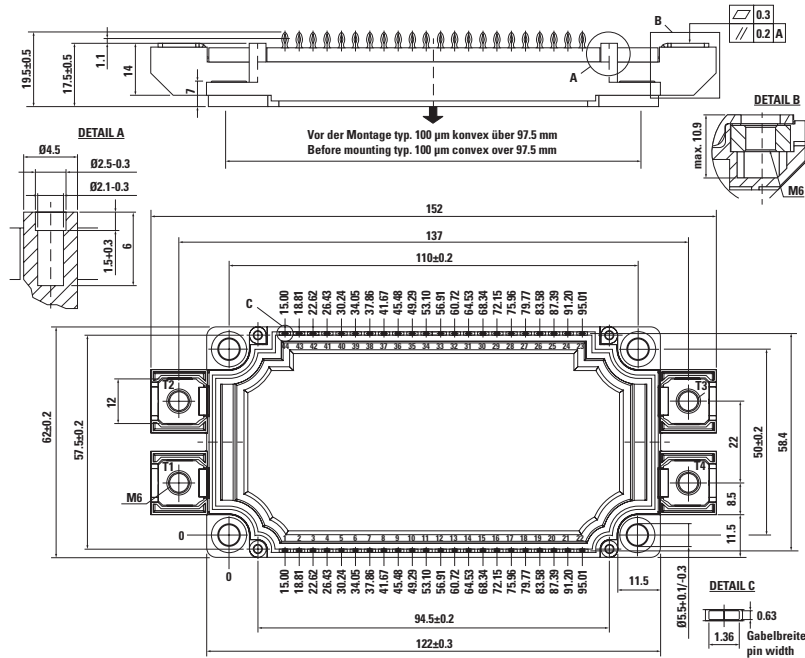


Modul-34mm Weight = 160 g

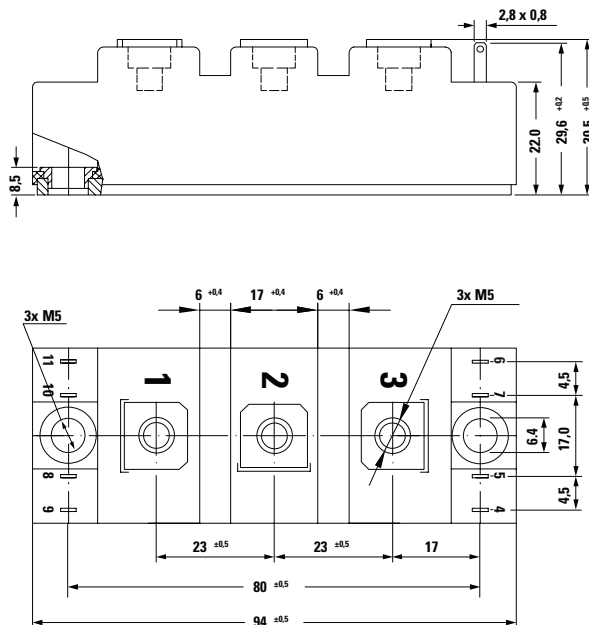


X200 Metal-can Weight = 2.5 g

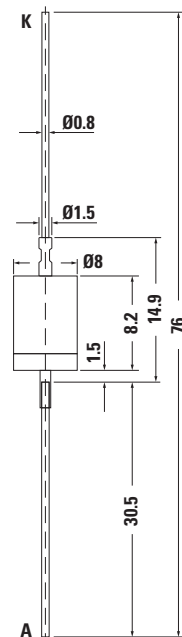


X201 FP-Case (oilproof)
Weight = 0.9 g

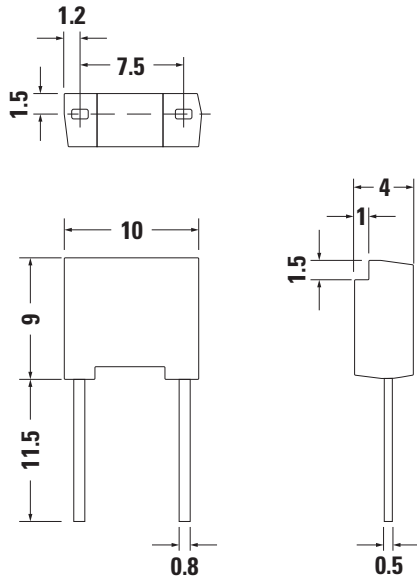


X202 BOD-Package
Weight = 9.5 g

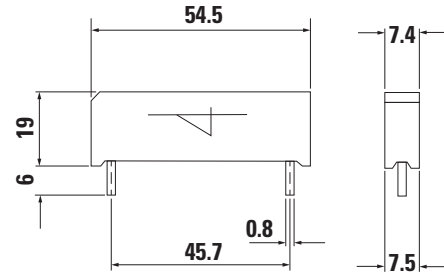


X204 DO-203 AA [M] (DO-4)
Weight = 6 g

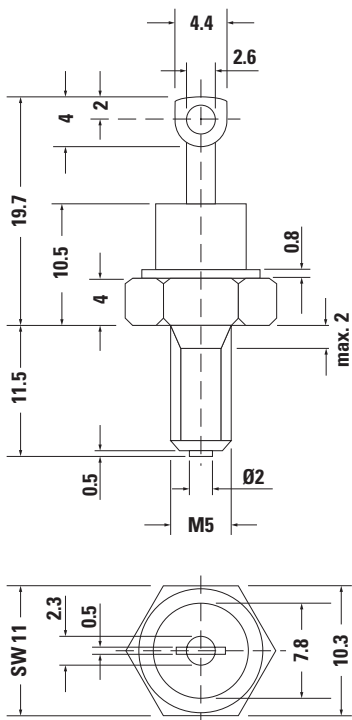

X205 DO-203 AA [UNF] (DO-4)
Weight = 5.5 g

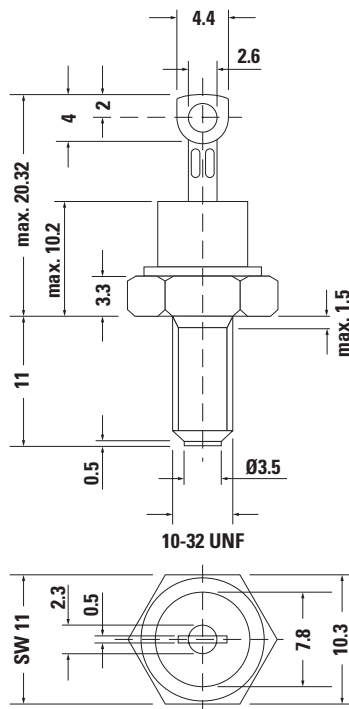


X206a DO-203 AB [UNF] (DO-5)
X206b DO-203 AB [M] (DO-5)
Weight = 14 g

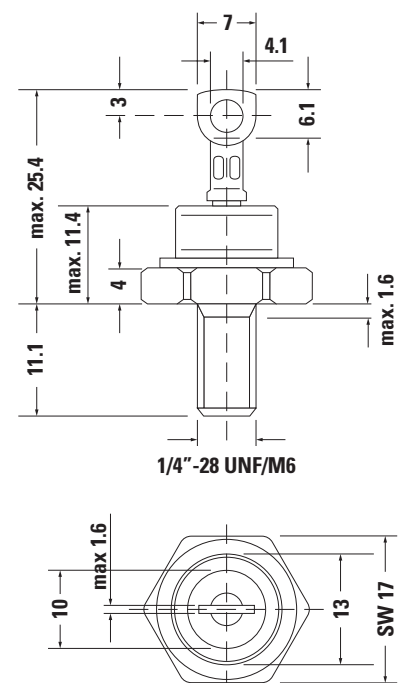


Outline Drawings

X207 DO-203 AB (DO-5)
Weight = 20 g

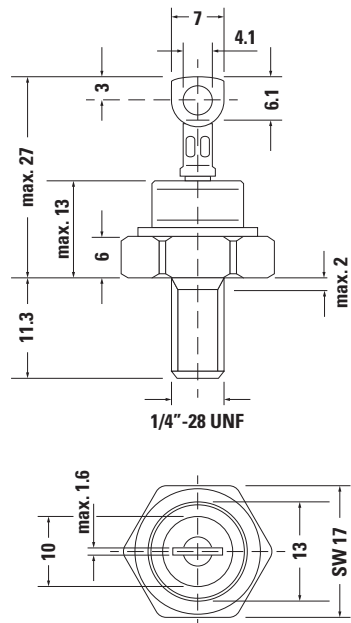


X209 TO-208 AA (TO-48)
Weight = 11.6 g

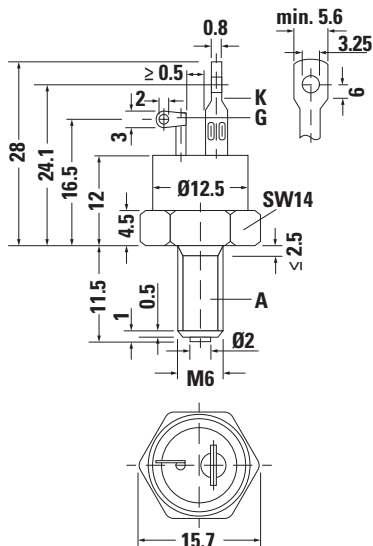


X210 TO-208 AC (TO-65)
Weight = 21.7 g

* See data sheet for pin arrangement

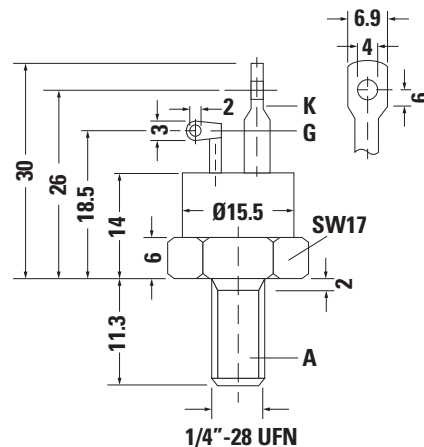


X207 DO-203 AB (DO-5)
Weight = 20 g

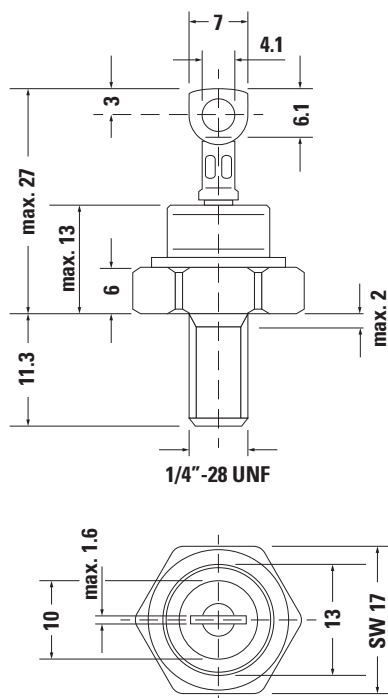


X252 UG
Weight = 155 g

* See data sheet for pin arrangement

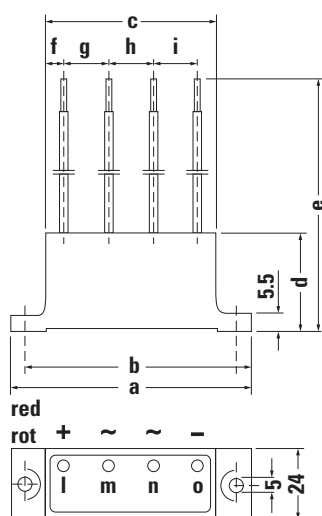

X253a UG
Weight = 310 g


b: w/o middle terminal

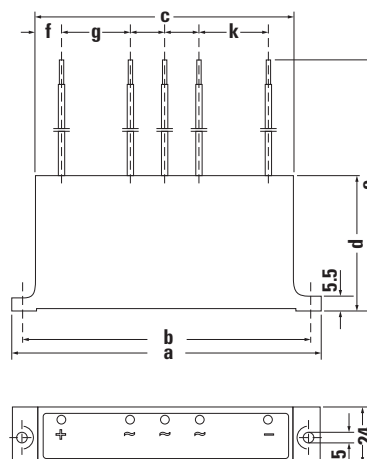


Type	a	b	c	d	e	f	g	h	i	k
UGB 3132 AD	80	70	57	58.5	260	6	15	15	15	—
UGB 6124 AG	135	125	112	58.5	260	11	32.5	25	32.5	—
UGD 6123 AG	135	125	112	58.5	260	8	30	18	18	30
UGD 8124 AG	135	125	112	58.5	260	8	30	18	18	30

Dimensions in mm


X254 VG-A
Weight = 61 g

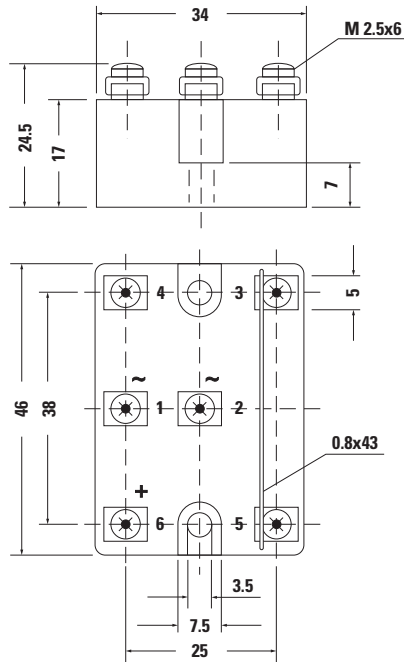

X255 VG-B
Weight = 87 g

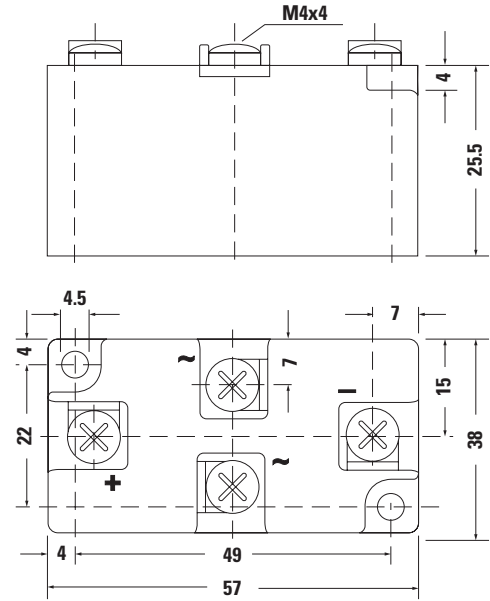


D5 DE475

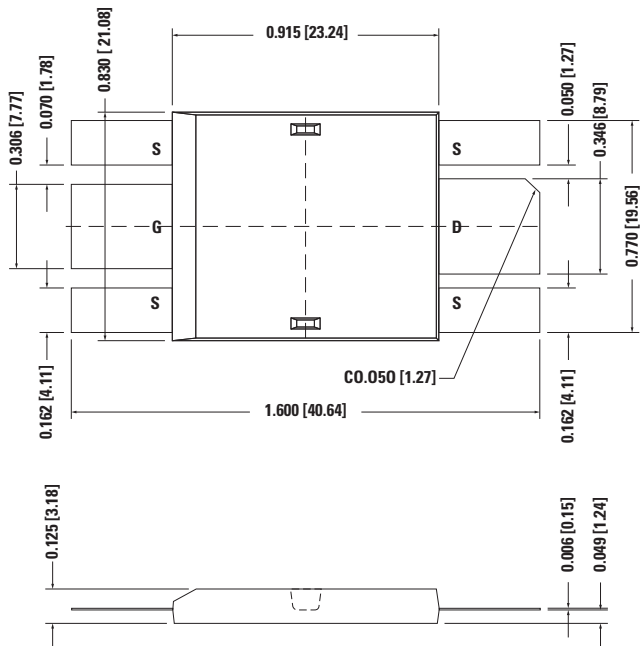


Outline Drawings

L001 SOT-223
Weight = 0.11 g




Dim	Millimeters			Inches		
	min	typ	max	min	typ	max
A	6.30	6.50	6.70	0.248	0.256	0.264
B	3.30	3.50	3.70	0.130	0.138	0.146
C	—	—	1.80	—	—	0.071
D	0.02	—	0.10	0.001	—	0.004
E	2.90	3.00	3.15	0.114	0.118	0.124
F	0.60	0.70	0.85	0.024	0.027	0.034
G	—	2.30	—	—	0.090	—
H	—	4.60	—	—	0.181	—
I	6.70	7.00	7.30	0.264	0.276	0.287
J	0.24	0.26	0.35	0.009	0.010	0.014
K	10° max					

L002 TO-218AC
Weight = 5 g



Dim	Millimeters		Inches	
	min	max	min	max
A	20.57	21.21	0.810	0.835
B	15.49	16.00	0.610	0.630
C	4.52	4.78	0.178	0.188
D	1.40	1.78	0.055	0.070
E	12.37	12.62	0.487	0.497
F	16.13	16.64	0.635	0.655
G	0.56	0.74	0.022	0.029
H	1.91	2.41	0.075	0.095
J	14.61	15.88	0.575	0.625
K	5.36	5.56	0.211	0.219
L	10.72	11.10	0.422	0.437
M	1.47	1.73	0.058	0.068
N	1.14	1.40	0.045	0.055
P	2.41	2.92	0.095	0.115
Q	0.20	0.41	0.008	0.016
R	0.20	0.41	0.008	0.016
U	4.10	4.20	0.164	0.165
W	2.17	2.42	0.085	0.095


L002a TO-218 x
Weight = 5.2 g



Note: Maximum torque to be applied to mounting tab is 8 in.-lbs. (0.904 Nm)


Dim	Millimeters		Inches	
	min	max	min	max
A	20.57	21.21	0.810	21.210
B	15.49	16.00	0.610	16.000
C	4.52	4.78	0.178	4.780
D	1.40	1.78	0.055	1.780
E	12.37	12.62	0.487	12.620
F	16.13	16.64	0.635	16.640
G	0.56	0.74	0.022	0.740
H	1.91	2.41	0.075	2.410
J	14.61	15.88	0.575	15.880
K	6.50	6.71	0.256	6.710
L	5.58	5.79	0.220	5.790
M	2.03	2.24	0.080	2.240
N	4.29	4.49	0.169	4.490
P	0.86	1.07	0.034	1.070
R	2.87	3.07	0.113	3.070
S	2.18	2.44	0.086	2.440
T	3.96	4.22	0.156	4.220
U	0.41	0.42	0.164	0.420
V	15.31	15.70	0.603	15.700
W	0.00	0.13	0.000	0.130
X	0.07	0.30	0.003	0.300
Y	0.71	0.81	0.028	0.810
Z	2.17	2.42	0.085	2.420

L003a DO-214AA
Weight = 0.1 g




Dim	Millimeters		Inches	
	min	max	min	max
A	1.950	2.200	0.077	0.086
B	4.060	4.570	0.160	0.180
C	3.300	3.940	0.130	0.155
D	2.130	2.440	0.084	0.096
E	0.760	1.520	0.030	0.060
F	—	0.203	—	0.008
G	5.210	5.590	0.205	0.220
H	0.152	0.305	0.006	0.012

L003b DO-214AB
Weight = 0.2 g




Dim	Millimeters		Inches	
	min	max	min	max
A	2.900	3.200	0.114	0.126
B	6.600	7.110	0.260	0.280
C	5.590	6.220	0.220	0.245
D	2.060	2.620	0.079	0.103
E	0.760	1.520	0.030	0.060
F	—	0.203	—	0.008
G	7.750	8.130	0.305	0.320
H	0.152	0.305	0.006	0.012

L004 TO-252AA
Weight = 0.3 g

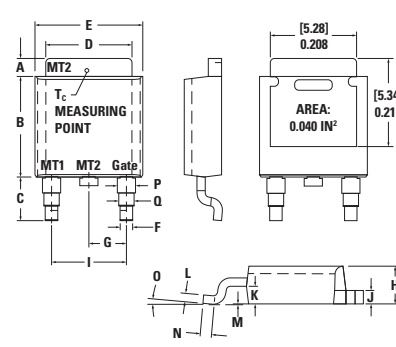


Dim	Millimeters			Inches		
	min	nom	max	min	nom	max
A	0.94	1.01	1.09	0.037	0.040	0.043
B	5.97	6.16	6.22	0.235	0.243	0.245
C	2.69	2.74	2.87	0.106	0.108	0.113
D	5.21	5.29	5.41	0.205	0.208	0.213
E	6.48	6.65	6.73	0.255	0.262	0.265
F	0.69	0.80	0.84	0.027	0.031	0.033
G	2.21	2.28	2.36	0.087	0.090	0.093
H	2.16	2.33	2.41	0.085	0.092	0.095
I	4.47	4.55	4.67	0.176	0.179	0.184
J	0.46	0.51	0.58	0.018	0.020	0.023
K	0.90	0.95	1.00	0.04	0.04	0.04
L	0.46	0.51	0.58	0.018	0.020	0.023
M	0.00	0.00	0.10	0.000	0.000	0.004
N	0.53	0.67	0.69	0.02	0.03	0.03
O	0°	0°	5°	0°	0°	5°
P	1.06	1.20	1.32	0.042	0.047	0.052
Q	0.86	1.00	1.11	0.034	0.039	0.044

L005a TO-220AB (NON-ISO)
Weight = 2 g

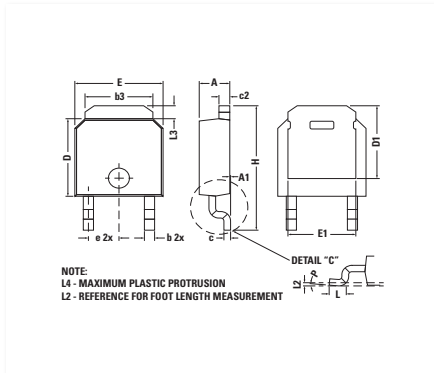


Dim	Millimeters			Inches		
	min	nom	max	min	nom	max
A	2.16	2.29	2.41	0.085	0.090	0.095
A1	0	0.08	0.13	0	0.003	0.005
b	0.64	0.76	0.89	0.025	0.030	0.035
b3	4.95	5.08	5.46	0.195	0.200	0.215
c	0.46	0.51	0.61	0.018	0.020	0.024
C2	0.46	0.81	0.89	0.018	0.032	0.035
D	5.97	6.10	6.22	0.235	0.240	0.245
D1	5.21	—	—	0.205	—	—
E	6.35	6.60	6.73	0.250	0.260	0.265
E1	4.32	—	—	0.170	—	—
e	2.29 BSC			0.090 BSC		
H	9.40	9.83	10.41	0.370	0.387	0.410
L	1.02	1.14	1.27	0.040	0.045	0.050
L2	0.25 BSC			0.010 BSC		
L3	0.89	—	1.27	0.035	—	0.050
P	0°	—	8°	0°	—	8°

L005a TO-220AB (NON-ISO)
Weight = 2 g

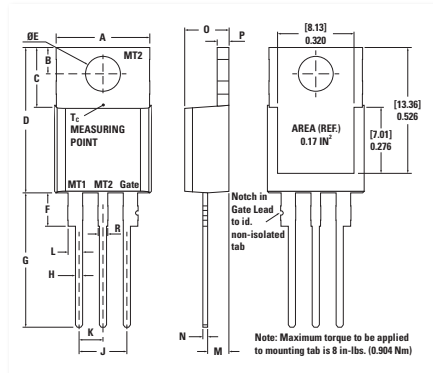


Dim	Millimeters		Inches	
	min	max	min	max
A	9.65	10.67	0.380	0.420
B	2.67	2.92	0.105	0.115
C	5.84	6.35	0.230	0.250
D	14.99	15.75	0.590	0.620
E	3.61	3.73	0.142	0.147
F	2.79	3.30	0.110	0.130
G	13.72	14.61	0.540	0.575
H	0.64	0.89	0.025	0.035
J	4.95	5.21	0.195	0.205
K	2.41	2.67	0.095	0.105
L	1.52	1.91	0.060	0.075
M	2.16	2.41	0.085	0.095
N	0.46	0.61	0.018	0.024
O	4.52	4.78	0.178	0.188
P	1.14	1.52	0.045	0.060
R	0.97	1.22	0.038	0.048

L005b TO-220AC
Weight = 2 g

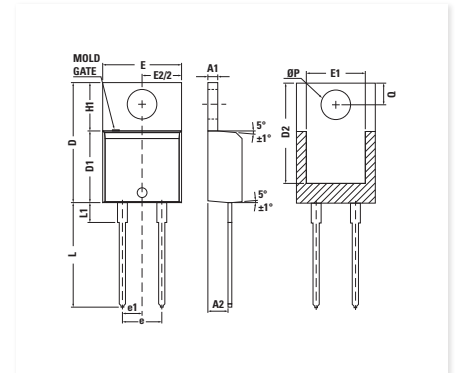


Dim	Millimeters		
	min	nominal	max
A	4.320	4.450	4.570
A1	1.140	1.270	1.400
A2	2.500	—	2.740
b	0.690	—	0.880
b1	0.680	—	0.870
b2	1.230	—	1.390
b3	1.220	1.270	1.380
c	0.360	—	0.503
c1	0.630	—	0.527
D	14.900	—	15.600
D1	8.615	—	9.017
D2	12.840	—	12.950
E	10.000	10.180	10.360
E1	7.570	7.610	7.680
e1	2.490	2.540	2.590
e	5.030	5.080	5.130
H1	6.295	6.545	6.795
L	13.000	13.500	14.000
L1	2.390	—	3.250
øP	3.710	3.840	3.960
Q	2.650	—	3.050
R	—	—	0.254

L005c TO-220AB (ISO)
Weight = 2 g

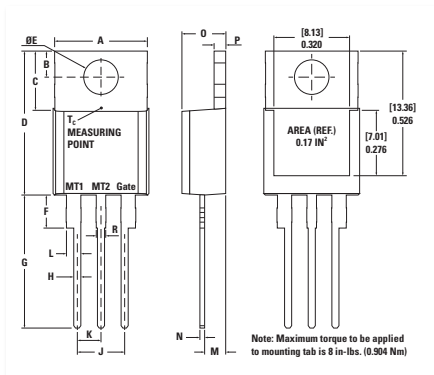

Dim	Millimeters		Inches	
	min	max	min	max
A	9.65	10.67	0.380	0.420
B	2.67	2.92	0.105	0.115
C	5.84	6.35	0.230	0.250
D	14.99	15.75	0.590	0.620
E	3.61	3.73	0.142	0.147
F	2.79	3.30	0.110	0.130
G	13.72	14.61	0.540	0.575
H	0.64	0.89	0.025	0.035
J	4.95	5.21	0.195	0.205
K	2.41	2.67	0.095	0.105
L	1.52	1.91	0.060	0.075
M	2.16	2.41	0.085	0.095
N	0.46	0.61	0.018	0.024
O	4.52	4.78	0.178	0.188
P	1.14	1.52	0.045	0.060
R	0.97	1.22	0.038	0.048


L006a TO-92
L006b TO-92 (GAK)
Weight = 0.2 g

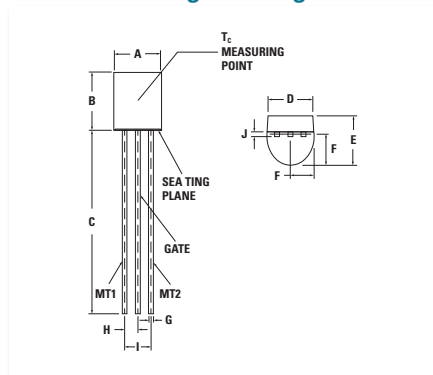

Dim	Millimeters		Inches	
	min	max	min	max
A	4.450	5.200	0.175	0.205
B	4.320	5.330	0.170	0.210
C	12.70	—	0.500	—
D	3.430	—	0.135	—
E	3.180	4.190	0.125	0.165
F	2.040	2.660	0.080	0.105
G	0.407	0.533	0.016	0.021
H	1.150	1.390	0.045	0.055
I	2.420	2.660	0.095	0.105
J	0.380	0.500	0.015	0.020


Outline Drawings

L007 SMT0-263
Weight = 2.6 g

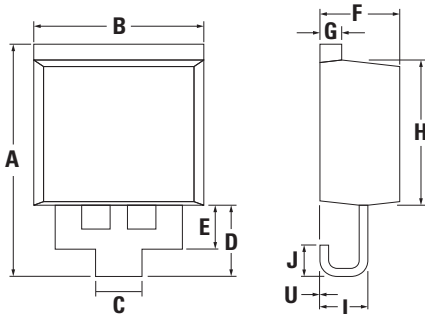


Dim	Millimeters		Inches	
	min	max	min	max
A	14.44	15.24	0.568	0.600
B	9.65	10.67	0.38	0.420
C	2.50	2.90	0.098	0.114
D	4.30	4.80	0.169	0.189
E	2.60	3.00	0.102	0.118
F	4.52	4.78	0.178	0.188
G	1.14	1.52	0.045	0.06
H	9.14	9.40	0.360	0.370
I	2.69	3.09	0.106	0.122
J	1.75	2.25	0.069	0.089
U	0	0.25	0	0.010

L008 1206 SMD
Weight = 0.008g




Dim	Millimeters		Inches	
	min	max	min	max
A	3.022	3.378	0.119	0.133
B	1.430	1.730	0.056	0.068
C	0.820	0.850	0.027	0.039
D	0.320	0.720	0.012	0.028

L011b TO-263AB
Weight = 1.5 g

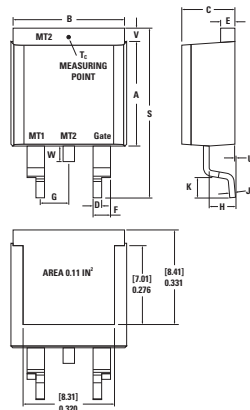

Dim	Millimeters		Inches	
	min	max	min	max
A	9.14	9.40	0.360	0.370
B	9.65	10.67	0.380	0.420
C	4.52	4.78	0.178	0.188
D	0.64	0.89	0.025	0.035
E	1.14	1.52	0.045	0.060
F	1.52	1.91	0.060	0.075
G	2.41	2.67	0.095	0.105
H	2.34	2.59	0.092	0.102
J	0.46	0.61	0.018	0.024
K	2.29	2.79	0.090	0.110
S	14.99	15.88	0.590	0.625
V	0.89	1.14	0.035	0.045
U	0.05	0.25	0.002	0.010
W	1.02	1.78	0.040	0.070


L008 1206 SMD
Weight = 0.008g



Dim	Millimeters		Inches	
	min	max	min	max
A	4.06	4.83	0.160	0.190
A1	typ 0.10		typ 0.004	
A2	2.41		0.095	
b	0.51	0.99	0.020	0.039
b2	1.14	1.40	0.045	0.055
c	0.40	0.74	0.016	0.029
c2	1.14	1.40	0.045	0.055
D	8.38	9.40	0.330	0.370
D1	8.00	8.89	0.315	0.350
D2	2.5		0.098	
E	9.65	10.41	0.380	0.410
E1	6.22	8.50	0.245	0.335
e	2.54 BSC		0.100 BSC	
e1	4.28		0.169	
H	14.61	15.88	0.575	0.625
L	1.78	2.79	0.070	0.110
L2	1.02	1.68	0.040	0.066
W	typ 0.02	0.040	typ 0.0008	0.002


L012b TO-263 (7)
Weight = 2.5 g

C) middle leg cut

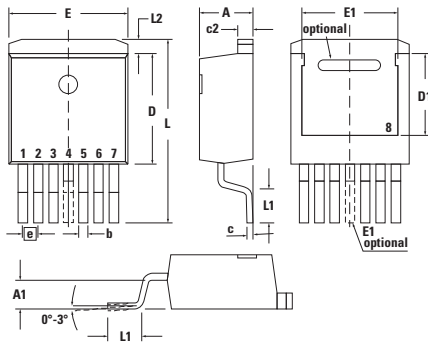


Dim	Millimeters		Inches	
	min	max	min	max
A	4.20	4.60	0.165	0.181
A1	2.45	2.75	0.096	0.108
b	0.65	0.90	0.026	0.035
c	0.40	0.60	0.016	0.024
c2	1.14	1.40	0.045	0.055
D	8.38	8.64	0.330	0.340
D1	6.10	6.35	0.240	0.250
E	10.00	10.30	0.394	0.406
E1	7.34	8.00	0.290	0.315
e	1.27 BSC		0.050 BSC	
L	14.73	15.75	0.580	0.620
L1	2.24	2.84	0.088	0.112
L2	1.35	1.55	0.053	0.061

L014a TO-247AD
Weight = 6 g

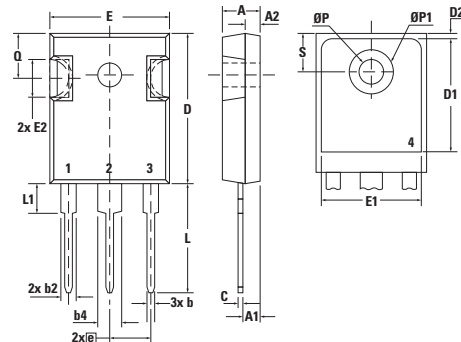


Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
c	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.845
D1	13.07	—	0.515	—
D2	0.51	1.35	0.020	0.053
E	15.48	16.24	0.610	0.640
E1	13.45	—	0.53	—
E2	4.31	5.48	0.170	0.216
e	5.45 BSC		0.215 BSC	
L	19.80	20.30	0.078	0.800
L1	—	4.49	—	0.177
Ø P	3.55	3.65	0.140	0.144
Ø P1	—	7.39	—	0.290
Q	5.38	6.19	0.212	0.244
S	6.14 BSC		0.242 BSC	

L014b TO-247AD
Weight = 6 g

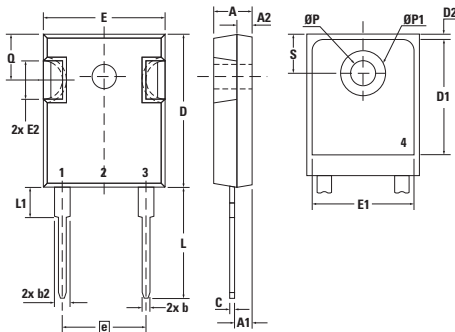

Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.30	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.50	2.49	0.059	0.098
b	0.99	1.40	0.039	0.055
b2	1.65	2.39	0.065	0.094
b4	2.59	3.43	0.102	0.135
c	0.38	0.89	0.015	0.035
D	20.79	21.45	0.819	0.845
D1	13.07	—	0.515	—
D2	0.51	1.35	0.020	0.053
E	15.48	16.24	0.610	0.640
E1	13.45	—	0.530	—
E2	4.31	5.48	0.170	0.216
e	10.90 BSC		0.430 BSC	
L	19.80	20.30	0.078	0.800
L1	—	4.49	—	0.177
Ø P	3.55	3.65	0.140	0.144
Ø P1	—	7.39	—	0.290
Q	5.38	6.19	0.212	0.244
S	6.14 BSC		0.242 BSC	


L014d TO-247AD
Weight = 6 g

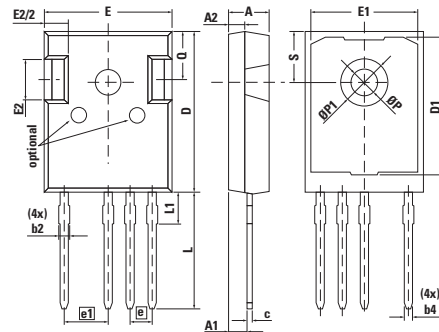

Dim	Millimeters		Inches	
	min	max	min	max
A	4.70	5.31	0.185	0.209
A1	2.21	2.59	0.087	0.102
A2	1.85	2.16	0.073	0.085
b	1.10	1.30	0.043	0.051
b2	1.30	1.50	0.051	0.059
c	0.50	0.89	0.020	0.035
D	20.80	21.46	0.819	0.845
D1	13.50	—	—	—
e	2.54 BSC		0.100 BSC	
e1	5.08 BSC		0.200 BSC	
E	15.49	16.26	0.610	0.640
E1	13.06	14.15	0.514	0.557
E2	4.32	4.83	0.170	0.190
L	19.81	20.57	0.780	0.810
L1	3.81	4.50	0.150	0.177
Ø P	3.55	3.70	0.140	0.146
Ø P1	7.00	7.40	0.276	0.291
Q	5.38	6.20	0.212	0.244
S	6.15 BSC		0.242 BSC	


Outline Drawings

L015 SOT-23
Weight = 0.008 g

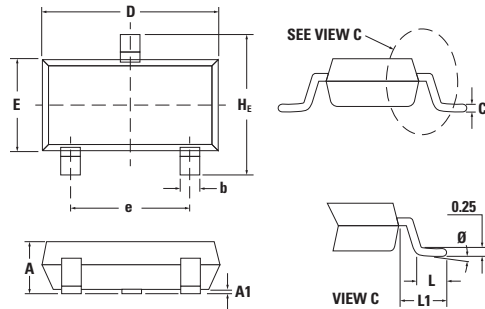


Dim	Millimeters		Inches	
	min	max	min	max
A	0.89	1.17	0.035	0.046
A1	0.05	0.15	0.001	0.006
b	0.30	0.50	0.012	0.020
c	0.08	0.20	0.003	0.008
D	2.80	3.00	0.110	0.118
E	1.20	1.40	0.047	0.055
e	1.90 BSC		0.075 BSC	
L	0.40	0.58	0.016	0.023
L1	0.46	0.64	0.018	0.025
HE	2.10	2.49	0.083	0.098
Ø	0°	10°	0°	10°

L016 SOT-89
Weight = 0.045 g

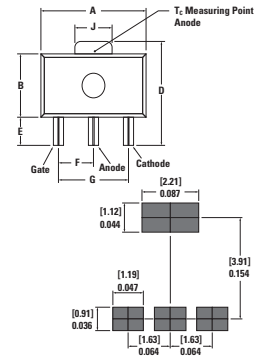


Dim	Millimeters		Inches	
	min	max	min	max
A	4.40	4.60	0.173	0.181
B	2.29	2.60	0.090	0.102
C	1.40	1.60	0.055	0.063
D	3.94	4.25	0.155	0.167
E	0.89	1.20	0.035	0.047
F	1.42	1.57	0.056	0.062
G	2.92	3.07	0.115	0.121
H	0.35	0.44	0.014	0.017
I	0.36	0.48	0.014	0.019
J	1.62	1.83	0.064	0.072

L019a TO-268 AA (D3PAK HV)
Weight = 4 g

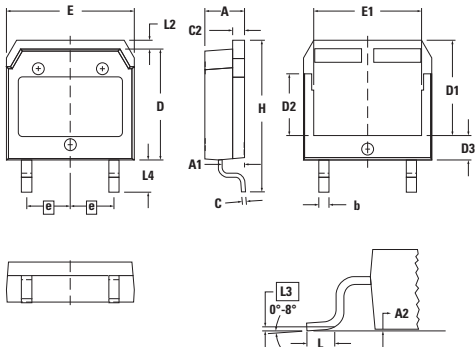

Dim	Millimeters		Inches	
	min	max	min	max
A	4.90	5.10	0.193	0.201
A1	2.70	2.90	0.106	0.114
A2	0.02	0.25	0.001	0.100
b	1.15	1.45	0.045	0.057
C	0.40	0.65	0.016	0.026
C 2	1.45	1.60	0.057	0.063
D	13.80	14.00	0.543	0.551
D1	11.80	12.10	0.465	0.476
D2	7.50	7.80	0.295	0.307
D3	2.90	3.20	0.114	0.126
E	15.85	16.05	0.624	0.632
E1	13.30	13.60	0.524	0.535
e	5.45 BSC		0.215 BSC	
H	18.70	19.10	0.736	0.752
L	1.70	2.00	0.067	0.079
L2	1.00	1.15	0.039	0.045
L3	0.25 BSC		0.010 BSC	
L4	3.80	4.10	0.150	0.161

L016 SOT-89
Weight = 0.045 g

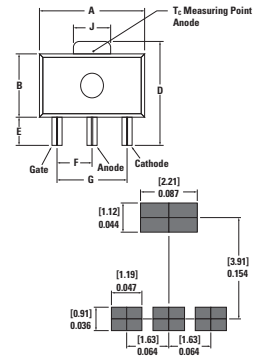

Dim	Millimeters		Inches	
	min	max	min	max
A	31.50	31.88	1.240	1.255
B	7.80	8.20	0.307	0.323
C	4.09	4.29	0.161	0.169
D	4.09	4.29	0.161	0.169
E	4.09	4.29	0.161	0.169
F	14.91	15.11	0.587	0.595
G	30.12	30.30	1.186	1.193
H	37.80	38.23	1.488	1.505
J	11.68	12.22	0.460	0.481
K	8.92	9.60	0.351	0.378
L	0.74	0.84	0.029	0.033
M	12.50	13.10	0.492	0.516
N	25.15	25.42	0.990	1.001
O	1.95	2.13	0.077	0.084
P	4.95	6.20	0.195	0.244
Q	26.54	26.90	1.045	1.059
R	3.94	4.42	0.155	0.174
S	4.55	4.85	0.179	0.191
T	24.59	25.25	0.968	0.994
U	-0.05	0.10	-0.002	0.004
V	3.20	5.50	0.126	0.217
W	19.81	21.08	0.780	0.830
Z	2.50	2.70	0.098	0.106

Part Number Alphanumeric Index

Symbols

2N607xA 85

B

B0470WC120 132
 B0470WC160 132
 B0713YC200 132
 B0713YC220 132
 B0713YC240 132
 B0713YC250 132
 B0800YC120 132
 B0800YC140 132
 B0800YC160 132
 B0800YC180 132
 B0870YC120 132
 B0870YC140 132
 B0870YC160 132
 B1050LC180 132
 B1050LC220 132
 B1115LC160 132
 B1115LC180 132
 B1175JK200 132
 B1175JK220 132
 B1230LC120 132
 B1230LC140 132
 B1230LC160 132
 B1265JK160 132
 B1265JK180 132
 B1370JK120 132
 B1370JK140 132
 B1370JK160 132
 B1545NC160 132
 B1545NC180 132
 B1545NC200 132
 B1725NC120 133
 B1725NC140 133
 B1725NC160 133
 B1725NC180 133
 B1815NC120 133
 B1815NC140 133
 B1815NC160 133
 B2295VC180 133
 B2295VC200 133
 B2295VC220 133
 B2295VF180 133
 B2295VF200 133
 B2295VF220 133
 B2505VC140 133
 B2505VC160 133
 B2505VF140 133
 B2505VF160 133
 B3420ZC180 133
 B3420ZC200 133
 B3420ZC220 133
 B3420ZD180 133
 B3420ZD200 133
 B3420ZD220 133
 B3570HA160 133
 B3570HA180 133
 B3885ZC160 133
 B3885ZC180 133
 B3885ZD160 133
 B3885ZD180 133

B3910HK180 133
 B3910HK200 133
 B3910HK220 133
 B3935ZC120 133
 B3935ZC140 133
 B3935ZC160 133
 B3935ZD120 133
 B3935ZD140 133
 B3935ZD160 133
 B4475HK160 133
 B4475HK180 133
 B4945HK120 133
 B4945HK140 133
 B6975HK040 133
 B6975HK060 133

C

C106x 82
 CLA5E1200PZ 6, 80
 CLA5E1200UC 80
 CLA15E1200NPB 80
 CLA15E1200NPZ 6, 80
 CLA16E800PN 80
 CLA16E1200PN 80
 CLA30E1200HB 81
 CLA30E1200NPZ 6, 80
 CLA30E1200PB 80
 CLA30E1200PC 80
 CLA30MT1200NPB 84
 CLA30MT1200NPZ 6, 84
 CLA40E1200HR 8, 81
 CLA40E1200NHB 81
 CLA40E1200NPZ 6, 81
 CLA40MT1200NHB 84
 CLA40MT1200NPB 84
 CLA40MT1200NPZ 6, 84
 CLA40P1200FC 15, 81
 CLA50E1200HB 81
 CLA50E1200TC 81
 CLA60MT1200NHB 84
 CLA60MT1200NHR 8, 84
 CLA60MT1200NTZ 8, 84
 CLA60MU1200LB 12
 CLA60PD1200NA 93
 CLA80E1200HF 81
 CLA80MT1200NHB 84
 CLA80MT1200NHR 8, 84
 CLA100E1200HB 81
 CLA100E1200KB 81
 CLA100E1200TZ 8
 CLA100PD1200NA 94
 CLA110MB1200NA 109
 CLA120E1200HB 81
 CLB30I1200HB 81
 CLB30I1200PZ 6, 81
 CLB40I1200PZ 6, 81
 CLE20E1200PC 81
 CLE30E1200PB 81
 CLE90UH1200TLB 81, 108
 CLF20E1200PB 81
 CMA20E1600PB 80
 CMA20E1600PZ 6, 80
 CMA30E1600PB 81

CMA30E1600PN 81
 CMA30E1600PZ 6, 81
 CMA30P1600FC 15, 81
 CMA40E1600HR 8, 81
 CMA50E1600HB 81
 CMA50E1600QB 81
 CMA50E1600TZ 8, 81
 CMA50P1600FC 15, 81
 CMA50P1600LB 12
 CMA60MT1600NHB 84
 CMA60MT1600NHR 8, 84
 CMA80E1600HB 81
 CMA80MT1600NHB 84
 CMA80MT1600NHR 8, 84
 CMA80PD1600NA 93
 CME30E1600PZ 6, 81
 CNE60E2200TZ 8, 81
 CPC3701 43
 CPC3703 43
 CPC3708 43
 CPC3710 43
 CPC3714 43
 CPC3720 43
 CPC3730 43
 CPC3902 43
 CPC3909 43
 CPC3960 43
 CPC3980 43
 CPC3981 43
 CPC3982 43
 CS19 80
 CS20 80
 CS20-22MOF1 15
 CS20-25MO1F 15
 CS22 80
 CS30 81
 CS45 81
 CS60 81

D

D60X7S4ARP 75
 D4015LTP 75
 D4020LTP 75
 D4025LTP 75
 D6001S4ARP 75
 D6002S4ARP 75
 D6015LTP 75
 D6020LTP 75
 D6025LTP 75
 D8015LTP 75
 D8020LTP 75
 D8025LTP 75
 DAA10EM1800PZ 5, 76
 DAA10P1800PZ 5, 76
 DAA200X1800NA 75, 77
 DAA200XA1800NA 75, 77
 DCG20B650LB 12, 101
 DCG40X1200LB 12
 DCK10I650HA 67
 DCK10I650PA 67
 DCK10I1200HA 67
 DCK10I1200PA 67
 DCK15I1200HA 67

DCK20C650HB 67
 DCK20C1200HB 67
 DCK20I650HA 67
 DCK20I1200HA 67
 DCK20I1200PC 5
 DCK30C1200HB 67
 DCK30I1200HA 67
 DCK40C1200HB 67
 DCK40I1200HA 67
 DFE10I600PM 72
 DFE25I600HA 72
 DFE240X600NA 73
 DFE250X600NA 73
 DH2X60 71
 DH2X61 71
 DH20 71
 DH40 71
 DH60 71
 DHG5I600PA 71
 DHG5I600PM 71
 DHG10C600PB 71
 DHG10I1200PA 71
 DHG10I1200PM 71
 DHG10I1800PA 71
 DHG10IM1800UZ 5, 71
 DHG20C1200PB 71
 DHG20I1200HA 71
 DHG20I1200PA 71
 DHG30I600HA 71
 DHG30I600PA 71
 DHG30I1200HA 71
 DHG30IM600PC 71
 DHG40B1200LB 12, 101
 DHG40C1200HB 71
 DHG40I4500KO 71
 DHG50X650NA 71
 DHG50X1200NA 71
 DHG55I3300FE 71
 DHG60C600HB 71
 DHG60I600HA 71
 DHG60I1200HA 71
 DHG60U1200LB 12, 101
 DHG100X650NA 71
 DHG100X1200NA 71
 DHH55 15, 67, 71
 DK015LTP 75
 DK020LTP 75
 DK025LTP 75
 DLA5P800UC 76
 DLA10IM800UC 76
 DLA20IM800PC 76
 DLA40IM800PC 77
 DLA60I1200HA 75, 77
 DLA100B800LB 12, 103
 DLA100B1200LB 12, 103
 DLA100IM1200TZ 8
 DMA10I1600PA 76
 DMA10IM1200UZ 5, 76
 DMA10IM1600PZ 5, 76
 DMA10IM1600UZ 5, 76
 DMA10P1200HR 8, 77
 DMA10P1200UZ 5, 76
 DMA10P1600HR 8, 77

DMA10P1600PZ	5, 76	DPG20C300PN	68	DSA30C100QB	61	DSEI12	72
DMA10P1600UZ	5, 76	DPG20C400PB	69	DSA30C150PB	62	DSEI12-12AZ	5
DMA10P1800PZ	5, 76	DPG20C400PC	69	DSA30C150PC	62	DSEI19	72
DMA30E1800HA	77	DPG20C400PN	69	DSA30C200IB	62	DSEI20	72
DMA30IM1600PZ	5, 77	DPG30C200HB	68	DSA30C200PB	62	DSEI25	72
DMA30P1200HB	77	DPG30C200PB	68	DSA30C200PC	62	DSEI30	72
DMA30P1600HB	77	DPG30C200PC	68	DSA30I100PA	61	DSEI36	72
DMA30P1600HR	8, 77	DPG30C300HB	68	DSA30I150PA	62	DSEI60	72
DMA40U1800GU	104	DPG30C300PB	68	DSA50C100HB	61	DSEI60-12A	73
DMA50I800HA	75, 77	DPG30C300PC	68	DSA50C100QB	61	DSEI120	73
DMA50I1200HA	75, 77	DPG30C400HB	69	DSA50C150HB	62	DSEI120-12AZ	8
DMA50I1600HA	75, 77	DPG30C400PB	69	DSA60C45HB	61	DSEK60	72
DMA50P1200HB	75, 77	DPG30I300HA	68	DSA60C45PB	61	DSEP2x25	67
DMA50P1200HR	8, 75, 77	DPG30I300PA	68	DSA60C60HB	61	DSEP2X31	70
DMA50P1600HB	75, 77	DPG30I400HA	69	DSA60C60PB	61	DSEP2X60	70
DMA80I1600HA	75, 77	DPG30I600PM	70	DSA60C100PB	61	DSEP2X61	70
DMA80IM1600HB	75, 77	DPG30IM300PC	68	DSA60C150PB	62	DSEP2X91	70
DMA90U1800LB	12, 105	DPG30IM400PC	69	DSA70C100HB	61	DSEP2X101	70
DMA120B800LB	12, 103	DPG30P300PJ	67, 68	DSA70C150HB	62	DSEP6	70
DMA150E1600NA	75, 77	DPG30P400PJ	67, 69	DSA70C200HB	62	DSEP8	70
DMA150YA1600NA	106	DPG60B600LB	12, 101	DSA80C45HB	61	DSEP12	70
DMA150YC1600NA	106	DPG60C200HB	68	DSA80C100PB	61	DSEP12-12AZ	5
DMA200X1600NA	75, 77	DPG60C200QB	68	DSA90C200HB	62	DSEP12-12BZ	5
DMA200XA1600NA	75, 77	DPG60C300HB	68	DSA90C200HR	8, 62	DSEP15	67, 70
DMA200YA1600NA	106	DPG60C300HJ	68	DSA120C150QB	62	DSEP29	70
DMA200YC1600NA	106	DPG60C300PC	68	DSA120X150LB	12, 62	DSEP30	67, 70
DMA240YA1600NA	106	DPG60C300QB	68	DSA120X200LB	12, 62	DSEP40-03AS	70
DMA240YC1600NA	106	DPG60C400HB	69	DSA240X150NA	62	DSEP60	70
DNA30E2200FE	15, 77	DPG60C400QB	69	DSA240X200LB	12, 62	DSEP60-12AZ	8
DNA30E2200PA	77	DPG60I300HA	68	DSA240X200NA	62	DSEP75	70
DNA30E2200PZ	5, 77	DPG60I400HA	69	DSB10I45PM	61	DSEP90	70
DNA30EM2200PZ	5, 77	DPG60IM300PC	69	DSB15IM30UC	61	DSEP90-12AZ	8
DNA30ER2200IY	77	DPG60IM400QB	69	DSB15IM45IB	61	DSI2x55	75, 77
DNA40U2200GU	104	DPG80C300HB	68	DSB20C60PN	61	DSI30	77
DNA90U2200LB	105	DPG80C400HB	69	DSB20I15PA	61	DSI45	77
DNA90YA2200NA	106	DPG120C300QB	69	DSB30C30PB	61	DSI45	77
DNA90YC2200NA	106	DPH30IS600HI	67, 69	DSB30C45PB	61	DSK8	76
DNA120E2200KO	75, 77	DPJ50XS1800NA	67	DSB30C60PB	61	DSP25	77
DPF30I300PA	68	DSA1	76	DSB40C15PB	61	DSP45	77
DPF30P600HR	8, 67	DSA1-12D	76	DSB60C30PB	61	DSP45-12AZ	8
DPF60C200HB	68	DSA10C150PB	62	DSB60C45HB	61	DSP45-16AZ	8
DPF60C200HJ	68	DSA10C150UC	62	DSB60C45PB	61	DSS2x41	63
DPF60C300HB	68	DSA10I100PM	61	DSB60C60PB	61	DSS2x61	63
DPF60I200HA	68	DSA10IM100UC	61	DSDI60	74	DSS2x81	63
DPF60IM400HB	69	DSA15I45PA	61	DSDI60-14A	74	DSS2X101	64
DPF80C200HB	68	DSA15IM45IB	61	DSEC16	70	DSS2x111	63
DPF100C1200HB	68	DSA15IM45UC	61	DSEC29	70	DSS2x121	63
DPF120C600HB	68	DSA15IM150UC	62	DSEC30	70	DSS6	63
DPF240X200NA	68	DSA15IM200UC	62	DSEC59	70	DSS6-015AS	64
DPF240X400NA	69	DSA20C45PB	61	DSEC60	70	DSS10	63
DPG10I200PA	68	DSA20C60PB	61	DSEC120	70	DSS16	63
DPG10I200PM	68	DSA20C60PN	61	DSEE15	67	DSS17	67
DPG10I300PA	68	DSA20C100PB	61	DSEE29	67	DSS20	63
DPG10I400PA	69	DSA20C100PN	61	DSEE30	67	DSS25	63
DPG10I400PM	69	DSA20C150PB	62	DSEE55	15, 67	DSS40-0008D	63
DPG10IM300UC	68	DSA20C150PN	62	DSEI2x30	73	DSS60	63
DPG10P400PJ	67, 69	DSA20C200PB	62	DSEI2x31	73	DSSK10	64
DPG15I200PA	68	DSA30C45PB	61	DSEI2x60	73	DSSK16	63
DPG15I300PA	68	DSA30C45PC	61	DSEI2x61	73	DSSK18	63
DPG15I400PM	69	DSA30C60PB	61	DSEI2x101	73	DSSK20	63, 64
DPG20C200PB	68	DSA30C100HB	61	DSEI2x121	73	DSSK28	63
DPG20C200PN	68	DSA30C100PB	61	DSEI2x161	73	DSSK30	64
DPG20C300PB	68	DSA30C100PN	61	DSEI8	72	DSSK38	63

Part Number Alphanumeric Index

DSSK40	63	DUR1040CT	66	FBO16-12N	102	IXBT10N170	59
DSSK48	63	DUR2030CT	66	FBO40	15, 102	IXBT16N170A	59
DSSK50	63, 64	DUR3060CT	66	FUE30	15, 101	IXBT16N170AHV	7, 59
DSSK60	63, 64	DUR6030WT	66	FUO22	15, 104	IXBT16N360HV	7
DSSK70	63	DUR6040WT	66	FUO22-12N	104	IXBT20N360HV	7
DSSK80	63	DUR6060W	66	FUO50	15, 104	IXBT22N300HV	7, 59
DST560S	66	DUR30120	66	G		IXBT24N170	59
DST580S	66	DUR60120W	66	GBO25	102	IXBT32N300HV	7, 59
DST860S	66	DUR75120W	66	GUO40	104	IXBT42N170	59
DST1040S	66	DURB1640CT	66	H		IXBT42N170A	59
DST1040S-A	66	DURB2020CT	66	HQ6025xH5	86	IXBT42N300HV	7, 59
DST1045S	66	DURD560A	66	HS4040xAQx	83	IXBX28N300HV	9, 59
DST1050S	66	DURF840	66	I		IXBX50N360HV	9
DST1545S	66	DURF1030CT	66	ITF48IF1200HR	8, 56	IXBX55N300	59
DST1550S	66	DURF1030CTR	66	IXA4IF1200TC	56	IXBX64N250	59
DST2045AX	65	DURF1040CT	66	IXA4IF1200UC	6, 56	IXBX75N170	59
DST2045C	65	DURF1040CTR	66	IXA12IF1200HB	56	IXBX75N170A	59
DST2050S	66	DURF1060	66	IXA12IF1200PB	56	IXCH36N250	59
DST2060C	65	DURF1060CT	66	IXA12IF1200TC	56	IXCK36N250	59
DST2060DJF	65	DURF2040CT	66	IXA17IF1200HJ	56	IXCP10M45S	43
DST2080C	65	DURF3060CT	66	IXA20I1200PB	56	IXCP10M90S	43
DST2080S	66	E		IXA20I1200PZ	56	IXCY10M45S	43
DST3060DJF	65	E0460QC45E	125	IXA20IF1200HB	56	IXCY10M90S	43
DST3060LC	65	E0660NC45E	125	IXA27IF1200HJ	56	IXEL40N400	58
DST3080C	65	E0660NH45E	125	IXA33IF1200HB	56	IXFA4N85X	37
DST5100S	66	E1250HC45E	125	IXA37IF1200HJ	56	IXFA4N100P	29
DST5200	65	E1500NC42P	125	IXA45IF1200HB	56	IXFA5N100P	29
DST8100S	66	E1500NC48P	125	IXA55I1200HJ	56	IXFA6N120P	29
DST10100S	66	E1500NH42P	125	IXA60IF1200NA	56	IXFA7N80P	28
DST12100S	66	E1500NH48P	125	IXA70I1200NA	56	IXFA7N100P	29
DST20100C	65	E1780TG65E	125	IXBA10N300HV	6, 59	IXFA8N65X2	35
DST20150C	65	E1800TC45E	125	IXBA14N300HV	6, 59	IXFA8N85XHV	6, 37
DST30100C	65	E2400EC45E	125	IXBA16N170AHV	6, 59	IXFA10N60P	27
DST40100C	65	E3000EC45E	125	IXBF22N300	14, 59	IXFA10N80P	28
DSTB2045C	65	E4000FD45E	125	IXBF32N300	14, 59	IXFA12N50P	27
DSTB30200C	65	EC103x	82	IXBF42N300	14, 59	IXFA12N65X2	35
DSTB60100C	65	F		IXBF55N300	14, 59	IXFA14N60P	27
DSTD5200	65	F0240YC250	124	IXBH6N170	59	IXFA14N85XHV	6, 37
DSTF2045C	65	F0240YC300	124	IXBH10N170	59	IXFA16N50P	27
DSTF2050C	65	F0240YH250	124	IXBH10N300	59	IXFA16N50P3	30
DSTF2060C	65	F0240YH300	124	IXBH10N300HV	9, 59	IXFA16N60P3	31
DSTF2080C	65	F0300WC140	124	IXBH14N300HV	9, 59	IXFA18N65X2	35
DSTF3045C	65	F0300WC180	124	IXBH16N170	59	IXFA20N50P3	30
DSTF3060C	65	F0800LC140	124	IXBH16N170A	59	IXFA20N85XHV	6, 37
DSTF3060CR	65	F0800LC180	124	IXBH16N360HV	9	IXFA22N60P3	31
DSTF3080C	65	F0900VC450	124	IXBH20N360HV	9	IXFA22N65X2	35
DSTF4045C	65	F0900VC520	124	IXBH22N300HV	9, 59	IXFA26N30X3	34
DSTF4050C	65	F0900VF450	124	IXBH24N170	59	IXFA26N50P3	30
DSTF4060C	65	F0900VF520	124	IXBH32N300	59	IXFA30N25X3	33
DSTF10200C	65	F1000LC080	124	IXBH32N300HV	9, 59	IXFA34N65X2	36
DSTF20100C	65	F1000LC120	124	IXBH42N170	59	IXFA36N20X3	32
DSTF20120C	65	F1300NC45P	124	IXBH42N170A	59	IXFA36N30P3	30
DSTF20120CR	65	F1300NC50P	124	IXBH42N300HV	9, 59	IXFA38N30X3	34
DSTF20150CR	65	F1300NC55P	124	IXBK55N300	59	IXFA44N25X3	33
DSTF30100C	65	F1400NC140	124	IXBK64N250	59	IXFA50N20X3	32
DSTF30100S	65	F1400NC180	124	IXBK75N170	59	IXFA56N30X3	34
DSTF30120C	65	F1500NC200	124	IXBL64N250	59	IXFA60N25X3	33
DSTF30120CR	65	F1500NC250	124	IXBN42N170A	59	IXFA72N20X3	32
DSTF30150C	65	F1600NC080	124	IXBN75N170	59	IXFA76N15T2	22
DSTF40100C	65	F1600NC120	124	IXBR42N170	59	IXFA80N25X3	33
DSTF40120C	65	FBE22	15, 101	IXBT6N170	59	IXFA102N15T	20
DSTF40150C	65	FBO16	15			IXFA110N15T2	22
DSTF60100C	65					IXFA130N10T	20

IXFA130N10T2	22	IXFH30N50P	27	IXFH340N075T2	22	IXFK240N15T2	22
IXFA180N10T2	22	IXFH30N50Q3	38	IXFH400N075T2	22	IXFK240N25X3	33
IXFA230N075T2	22	IXFH30N60P	27	IXFJ20N85X	8, 37	IXFK250N10P	26
IXFB30N120P	29	IXFH30N85X	37	IXFJ26N50P3	8, 30	IXFK300N20X3	32
IXFB40N110P	29	IXFH32N100X	37	IXFJ80N25X3	8, 33	IXFK320N17T2	22
IXFB40N110Q3	38	IXFH34N50P3	30	IXFK20N120P	29	IXFK360N10T	20
IXFB44N100P	29	IXFH34N65X2	36	IXFK24N80P	28	IXFK360N15T2	22
IXFB44N100Q3	38	IXFH36N50P	27	IXFK24N100Q3	38	IXFK420N10T	20
IXFB52N90P	28	IXFH36N60P	27	IXFK26N100P	29	IXFK520N075T2	22
IXFB60N80P	28	IXFH40N85X	37	IXFK26N120P	29	IXFL32N120P	29
IXFB62N80Q3	38	IXFH42N60P3	31	IXFK32N80P	28	IXFL38N100P	29
IXFB70N100X	37	IXFH44N50P	27	IXFK32N80Q3	38	IXFL44N100P	29
IXFB82N60P	27	IXFH44N50Q3	38	IXFK32N90P	28	IXFL60N80P	28
IXFB82N60Q3	38	IXFH46N30T	20	IXFK32N100P	29	IXFL82N60P	27
IXFB90N85X	37	IXFH46N65X2	36	IXFK32N100Q3	38	IXFL100N50P	27
IXFB100N50P	27	IXFH50N30Q3	38	IXFK32N100X	37	IXFL132N50P3	30
IXFB100N50Q3	38	IXFH50N60P3	31	IXFK36N60P	27	IXFL210N30P3	30
IXFB110N60P3	31	IXFH50N85X	37	IXFK40N90P	28	IXFN20N120P	29
IXFB132N50P3	30	IXFH52N30P	26	IXFK44N50P	27	IXFN26N100P	29
IXFB150N65X2	36	IXFH56N30X3	34	IXFK44N80P	28	IXFN26N120P	29
IXFB170N30P	27	IXFH60N50P3	30	IXFK44N80Q3	38	IXFN30N120P	29
IXFB210N20P	26	IXFH60N65X2	36	IXFK48N60P	27	IXFN32N80P	28
IXFB210N30P3	30	IXFH69N30P	26	IXFK48N60Q3	38	IXFN32N100P	29
IXFB300N10P	26	IXFH70N20Q3	38	IXFK50N85X	37	IXFN32N100Q3	38
IXFH5N100P	29	IXFH70N30Q3	38	IXFK52N100X	37	IXFN32N120P	29
IXFH6N120P	29	IXFH72N30X3	34	IXFK64N50P	27	IXFN38N100P	29
IXFH7N100P	29	IXFH74N20P	26	IXFK64N50Q3	38	IXFN40N90P	28
IXFH10N80P	28	IXFH80N25X3	33	IXFK64N60P	27	IXFN40N110P	29
IXFH10N100P	29	IXFH80N65X2	36	IXFK64N60P3	31	IXFN40N110Q3	38
IXFH12N65X2	35	IXFH86N30T	20	IXFK64N60Q3	38	IXFN44N80P	28
IXFH12N80P	28	IXFH88N30P	27	IXFK66N85X	37	IXFN44N80Q3	38
IXFH12N90P	28	IXFH90N20X3	32	IXFK78N50P3	30	IXFN44N100P	29
IXFH12N100P	29	IXFH94N30P3	30	IXFK80N50P	27	IXFN44N100Q3	38
IXFH12N120P	29	IXFH94N30T	20	IXFK80N50Q3	38	IXFN48N60P	27
IXFH14N60P	27	IXFH96N15P	26	IXFK80N60P3	31	IXFN52N90P	28
IXFH14N80P	28	IXFH96N20P	26	IXFK80N65X2	36	IXFN52N100X	37
IXFH14N85X	37	IXFH100N25P	26	IXFK88N30P	27	IXFN56N90P	28
IXFH15N100P	29	IXFH100N30X3	34	IXFK98N50P3	30	IXFN60N80P	28
IXFH15N100Q3	38	IXFH102N15T	20	IXFK100N65X2	36	IXFN62N80Q3	38
IXFH16N50P	27	IXFH110N10P	26	IXFK102N30P	27	IXFN64N50P	27
IXFH16N50P3	30	IXFH110N15T2	22	IXFK120N20P	26	IXFN64N60P	27
IXFH16N60P3	31	IXFH110N25T	20	IXFK120N25P	26	IXFN66N85X	37
IXFH16N80P	28	IXFH120N15P	26	IXFK120N30P3	30	IXFN70N100X	37
IXFH16N120P	29	IXFH120N20P	26	IXFK120N30T	20	IXFN74N100X	37
IXFH18N60P	27	IXFH120N25T	20	IXFK120N65X2	36	IXFN80N50P	27
IXFH18N65X2	35	IXFH120N25X3	33	IXFK140N20P	26	IXFN80N50Q3	38
IXFH18N90P	28	IXFH120N30X3	34	IXFK140N25T	20	IXFN80N60P3	31
IXFH18N100Q3	38	IXFH140N10P	26	IXFK140N30P	27	IXFN82N60P	27
IXFH20N50P3	30	IXFH140N20X3	32	IXFK150N30P3	30	IXFN82N60Q3	38
IXFH20N80P	28	IXFH150N15P	26	IXFK150N30X3	34	IXFN90N85X	37
IXFH20N85X	37	IXFH150N17T2	22	IXFK160N30T	20	IXFN100N50P	27
IXFH20N100P	29	IXFH150N20T	20	IXFK170N10P	26	IXFN100N50Q3	38
IXFH22N50P	27	IXFH150N25X3	33	IXFK170N20P	26	IXFN100N65X2	36
IXFH22N60P	27	IXFH150N30X3	34	IXFK170N20T	20	IXFN102N30P	27
IXFH22N60P3	31	IXFH160N15T	20	IXFK170N25X3	33	IXFN110N60P3	31
IXFH22N65X2	35	IXFH160N15T2	22	IXFK180N15P	26	IXFN110N85X	37
IXFH24N80P	28	IXFH170N10P	26	IXFK180N25T	20	IXFN120N65X2	36
IXFH24N90P	28	IXFH170N25X3	33	IXFK200N10P	26	IXFN132N50P3	30
IXFH26N50P	27	IXFH180N20X3	32	IXFK210N30X3	34	IXFN140N20P	26
IXFH26N50P3	30	IXFH220N20X3	32	IXFK220N15P	26	IXFN140N25T	20
IXFH26N60P	27	IXFH230N10T	20	IXFK220N17T2	22	IXFN140N30P	27
IXFH26N100X	37	IXFH230N075T2	22	IXFK220N20X3	32	IXFN150N65X2	36
IXFH28N60P3	31	IXFH320N10T2	22	IXFK230N20T	20	IXFN160N30T	20

Part Number Alphanumeric Index

IXFN170N25X3	33	IXFP56N30X3M	34	IXFR102N30P	26	IXFX32N100Q3	38
IXFN170N30P	27	IXFP60N25X3	33	IXFR140N20P	26	IXFX40N90P	28
IXFN170N65X2	36	IXFP60N25X3M	33	IXFR140N30P	26	IXFX44N80P	28
IXFN180N15P	26	IXFP72N20X3	32	IXFR180N15P	26	IXFX44N80Q3	38
IXFN180N25T	20	IXFP72N20X3M	32	IXFR200N10P	26	IXFX48N60P	27
IXFN200N10P	26	IXFP72N30X3	34	IXFR230N20T	20	IXFX48N60Q3	38
IXFN210N20P	26	IXFP72N30X3M	34	IXFT14N80P	28	IXFX52N100X	37
IXFN210N30P3	30	IXFP76N15T2	22	IXFT15N100Q3	38	IXFX64N50P	27
IXFN210N30X3	34	IXFP80N25X3	33	IXFT16N80P	28	IXFX64N50Q3	38
IXFN220N20X3	32	IXFP90N20X3	32	IXFT16N120P	29	IXFX64N60P	27
IXFN230N20T	20	IXFP90N20X3M	32	IXFT18N100Q3	38	IXFX64N60P3	31
IXFN240N15T2	22	IXFP102N15T	20	IXFT20N100P	29	IXFX64N60Q3	38
IXFN240N25X3	33	IXFP110N15T2	22	IXFT24N80P	28	IXFX66N85X	37
IXFN300N10P	26	IXFP130N10T	20	IXFT24N90P	28	IXFX78N50P3	30
IXFN300N20X3	32	IXFP130N10T2	22	IXFT26N60P	27	IXFX80N50P	27
IXFN320N17T2	22	IXFP180N10T2	22	IXFT26N100XHV	7, 37	IXFX80N50Q3	38
IXFN360N10T	20	IXFP230N075T2	22	IXFT30N50Q3	38	IXFX80N60P3	31
IXFN360N15T2	22	IXFQ8N85X	37	IXFT30N85XHV	7, 37	IXFX98N50P3	30
IXFN420N10T	20	IXFQ20N50P3	30	IXFT32N100XHV	7, 37	IXFX100N65X2	36
IXFN520N075T2	22	IXFQ22N60P3	31	IXFT36N50P	27	IXFX120N25P	26
IXFP4N85X	37	IXFQ26N50P3	30	IXFT36N60P	27	IXFX120N30P3	30
IXFP4N85XM	37	IXFQ28N60P3	31	IXFT40N85XHV	7, 37	IXFX120N30T	20
IXFP4N100P	29	IXFQ34N50P3	30	IXFT44N50P	27	IXFX120N65X2	36
IXFP5N100P	29	IXFQ50N60P3	31	IXFT44N50Q3	38	IXFX140N25T	20
IXFP6N120P	29	IXFQ60N25X3	33	IXFT50N30Q3	38	IXFX140N30P	27
IXFP7N80P	28	IXFQ60N50P3	30	IXFT50N60P3	31	IXFX150N30P3	30
IXFP7N100P	29	IXFQ72N20X3	32	IXFT50N85XHV	7, 37	IXFX160N30T	20
IXFP8N65X2	35	IXFQ72N30X3	34	IXFT60N50P3	30	IXFX170N20P	26
IXFP8N85X	37	IXFQ80N25X3	33	IXFT60N65X2HV	7, 36	IXFX170N20T	20
IXFP8N85XM	37	IXFQ90N20X3	32	IXFT69N30P	26	IXFX180N15P	26
IXFP10N60P	27	IXFQ94N30P3	30	IXFT70N20Q3	38	IXFX180N25T	20
IXFP10N80P	28	IXFQ120N25X3	33	IXFT70N30Q3	38	IXFX200N10P	26
IXFP12N50P	27	IXFQ140N20X3	32	IXFT80N65X2HV	7, 36	IXFX210N30X3	34
IXFP12N65X2	35	IXFR15N100Q3	38	IXFT86N30T	20	IXFX220N17T2	22
IXFP12N65X2M	35	IXFR16N120P	29	IXFT88N30P	27	IXFX230N20T	20
IXFP14N85X	37	IXFR18N90P	28	IXFT94N30P3	30	IXFX240N15T2	22
IXFP14N85XM	37	IXFR20N80P	28	IXFT94N30T	20	IXFX240N25X3	33
IXFP16N50P	27	IXFR20N120P	29	IXFT96N20P	26	IXFX250N10P	26
IXFP16N50P3	30	IXFR24N80P	28	IXFT100N30X3HV	7, 34	IXFX300N20X3	32
IXFP16N60P3	31	IXFR24N90P	28	IXFT120N15P	26	IXFX320N17T2	22
IXFP18N65X2	35	IXFR24N100Q3	38	IXFT120N25T	20	IXFX360N10T	20
IXFP18N65X2M	35	IXFR26N100P	29	IXFT120N25X3HV	7, 33	IXFX360N15T2	22
IXFP20N50P3	30	IXFR26N120P	29	IXFT120N30X3HV	7, 34	IXFX420N10T	20
IXFP20N85X	37	IXFR30N60P	27	IXFT140N10P	26	IXFX520N075T2	22
IXFP22N60P3	31	IXFR32N80P	28	IXFT140N20X3HV	7, 32	IXFY4N85X	37
IXFP22N65X2	35	IXFR32N80Q3	38	IXFT150N17T2	22	IXFY8N65X2	35
IXFP22N65X2M	35	IXFR32N100P	29	IXFT150N20T	20	IXFY26N30X3	34
IXFP26N30X3	34	IXFR32N100Q3	38	IXFT150N25X3HV	7, 33	IXFY30N25X3	33
IXFP26N50P3	30	IXFR36N50P	27	IXFT150N30X3HV	7, 34	IXFY36N20X3	32
IXFP30N25X3	33	IXFR36N60P	27	IXFT170N25X3HV	7, 33	IXG50I4500KN	58
IXFP30N25X3M	33	IXFR40N90P	28	IXFT180N20X3HV	7, 32	IXG70IF1200NA	56
IXFP34N65X2	36	IXFR44N50P	27	IXFT220N20X3HV	7, 32	IXGA12N120A3	57
IXFP34N65X2M	36	IXFR44N50Q3	38	IXFT320N10T2	22	IXGA20N120A3	57
IXFP36N20X3	32	IXFR44N80P	28	IXFT340N075T2	22	IXGA20N250HV	58
IXFP36N20X3M	32	IXFR48N60P	27	IXFT400N075T2	22	IXGA48N60A3	57
IXFP36N30P3	30	IXFR48N60Q3	38	IXFX20N120P	29	IXGH12N120A3	57
IXFP38N30X3	34	IXFR64N50P	27	IXFX24N100Q3	38	IXGH20N120A3	57
IXFP38N30X3M	34	IXFR64N50Q3	38	IXFX26N100P	29	IXGH25N250	58
IXFP44N25X3	33	IXFR64N60P	27	IXFX26N120P	29	IXGH32N120A3	57
IXFP44N25X3M	33	IXFR64N60Q3	38	IXFX32N80P	28	IXGH48N60A3	57
IXFP50N20X3	32	IXFR80N50P	27	IXFX32N80Q3	38	IXGH48N60A3D1	57
IXFP50N20X3M	32	IXFR80N50Q3	38	IXFX32N90P	28	IXGH72N60A3	57
IXFP56N30X3	34	IXFR80N60P3	31	IXFX32N100P	29	IXGK55N120A3H1	57

IXGK75N250.....	58	IXTA4N70X2.....	37	IXTA120N075T2.....	21	IXTH30N50L2.....	41
IXGK82N120A3.....	57	IXTA4N150HV.....	6, 31	IXTA120P065T.....	44	IXTH30N50P.....	25
IXGK120N120A3.....	57	IXTA6N50D2.....	42	IXTA130N10T.....	19	IXTH30N60L2.....	41
IXGK320N60A3.....	57	IXTA6N100D2.....	42	IXTA140N055T2.....	21	IXTH30N60P.....	25
IXGL75N250.....	58	IXTA06N120P.....	25	IXTA140P05T.....	44	IXTH30N65X2.....	35
IXGN320N60A3.....	57	IXTA08N50D2.....	42	IXTA160N04T2.....	21	IXTH32P20T.....	44
IXGN400N60A3.....	57	IXTA8N65X2.....	35	IXTA170N075T2.....	21	IXTH34N65X2.....	35
IXGP12N120A3.....	57	IXTA8N70X2.....	37	IXTA180N10T.....	19	IXTH36N50P.....	25
IXGP20N120A3.....	57	IXTA08N100D2.....	42	IXTA200N055T2.....	21	IXTH36P15P.....	45
IXGP36N60A3.....	57	IXTA08N100D2HV.....	6, 42	IXTA220N04T2.....	21	IXTH38N30L2.....	41
IXGP48N60A3.....	57	IXTA08N100P.....	25	IXTA230N075T2.....	21	IXTH40N50L2.....	41
IXGT25N250.....	58	IXTA08N120P.....	25	IXTA260N055T2.....	21	IXTH44N25L2.....	41
IXGT25N250HV.....	58	IXTA10N60P.....	25	IXTA300N04T2.....	21	IXTH44P15T.....	44
IXGT32N100A3.....	57	IXTA10P15T.....	44	IXTB30N100L.....	40	IXTH48N65X2.....	35
IXGT32N120A3.....	57	IXTA10P50P.....	45	IXTF1N250.....	23	IXTH48P20P.....	45
IXGT72N60A3.....	57	IXTA12N50P.....	25	IXTF1N450.....	14, 23	IXTH50N30L2.....	41
IXGX55N120A3H1.....	57	IXTA12N65X2.....	35	IXTF1R4N450.....	14, 23	IXTH52P10P.....	45
IXGX75N250.....	58	IXTA12N70X2.....	37	IXTF2N300P3.....	23	IXTH58N25L2.....	41
IXGX82N120A3.....	57	IXTA14N60P.....	25	IXTF02N450.....	14, 23	IXTH60N20L2.....	41
IXGX120N60A3.....	57	IXTA15N50L2.....	41	IXTF6N200P3.....	23	IXTH60N20X4.....	33
IXGX120N120A3.....	57	IXTA15P15T.....	44	IXTF200N10T.....	19	IXTH62N65X2.....	35
IXSA20N120L2.....	39	IXTA16N50P.....	25	IXTH1N170DHV.....	42	IXTH64N10L2.....	41
IXSA40N65L2.....	39	IXTA18P10T.....	44	IXTH1N200P3.....	23	IXTH68P20T.....	44
IXSA40N120L2.....	39	IXTA20N65X2.....	35	IXTH1N200P3HV.....	9, 23	IXTH75N10L2.....	41
IXSA60N65L2.....	39	IXTA24N65X2.....	35	IXTH1N250.....	23	IXTH76N25T.....	19
IXSA65N120L2.....	39	IXTA24P085T.....	44	IXTH1N300P3HV.....	9, 23	IXTH76P10T.....	44
IXSA80N120L2.....	39	IXTA26P10T.....	44	IXTH1N450HV.....	9, 23	IXTH80N20L.....	40
IXSA110N65L2-7TR.....	39	IXTA26P20P.....	45	IXTH1R4N250P3.....	23	IXTH80N65X2.....	35
IXSG40N65L2K.....	39	IXTA28P065T.....	44	IXTH2N150L.....	40	IXTH80N075L2.....	41
IXSG60N65L2K.....	39	IXTA30N25L2.....	41	IXTH2N170D2.....	42	IXTH86N25T.....	19
IXSG110N65L2K.....	39	IXTA30N65X2.....	35	IXTH02N250.....	23	IXTH88N30P.....	25
IXSH20N120L2KHV.....	39	IXTA32P05T.....	44	IXTH2N300P3HV.....	9, 23	IXTH90P10P.....	45
IXSH40N65L2KHV.....	39	IXTA32P20T.....	44	IXTH02N450HV.....	9, 23	IXTH94N20X4.....	33
IXSH40N120L2KHV.....	39	IXTA34N65X2.....	35	IXTH2R4N120P.....	25	IXTH96N20P.....	24
IXSH60N65L2KHV.....	39	IXTA36N30P.....	24	IXTH3N100P.....	25	IXTH96N25T.....	19
IXSH80N120L2KHV.....	39	IXTA36P15P.....	45	IXTH3N120.....	31	IXTH96P085T.....	44
IXSH100N65L2KHV.....	39	IXTA42N25P.....	24	IXTH3N150.....	31	IXTH110N10L2.....	41
IXSH150N120L3KHV.....	39	IXTA44P15T.....	44	IXTH3N200P3HV.....	9, 23	IXTH110N25T.....	19
IXSJ25N120R1.....	8, 39	IXTA48N20T.....	19	IXTH4N100L.....	40	IXTH120N20X4.....	33
IXSJ25N120R1K.....	8, 39	IXTA48P05T.....	44	IXTH4N150.....	31	IXTH120P065T.....	44
IXSJ43N120R1.....	8, 39	IXTA50N20P.....	24	IXTH04N300P3HV.....	9, 23	IXTH130N10T.....	19
IXSJ43N120R1K.....	8, 39	IXTA50N25T.....	19	IXTH05N250P3HV.....	9, 23	IXTH130N20T.....	19
IXSJ80N120R1.....	8, 39	IXTA52P10P.....	45	IXTH6N50D2.....	42	IXTH140N075L2.....	41
IXSJ80N120R1K.....	8, 39	IXTA60N10T.....	19	IXTH6N100D2.....	42	IXTH140P05T.....	44
IXTA1N100P.....	25	IXTA60N20T.....	19	IXTH6N120.....	31	IXTH140P10T.....	44
IXTA1N120P.....	25	IXTA60N20X4.....	33	IXTH6N150.....	31	IXTH180N10T.....	19
IXTA1N170DHV.....	42	IXTA62N15P.....	24	IXTH10N100D2.....	42	IXTH200N10T.....	19
IXTA1N200P3HV.....	6, 23	IXTA64N10L2.....	41	IXTH10P50P.....	45	IXTH220N20X4.....	33
IXTA1R4N100P.....	25	IXTA70N075T2.....	21	IXTH12N65X2.....	35	IXTH240N15X4.....	32
IXTA1R4N120P.....	25	IXTA75N10P.....	24	IXTH12N70X2.....	37	IXTH260N055T2.....	21
IXTA1R6N50D2.....	42	IXTA76N25T.....	19	IXTH12N100L.....	40	IXTH300N04T2.....	21
IXTA1R6N100D2.....	42	IXTA76P10T.....	44	IXTH15N50L2.....	41	IXTH360N055T2.....	21
IXTA2N100P.....	25	IXTA80N12T2.....	21	IXTH16N20D2.....	42	IXTH440N055T2.....	21
IXTA02N250HV.....	6, 23	IXTA80N075L2.....	41	IXTH16N50D2.....	42	IXTH500N04T2.....	21
IXTA2R4N120P.....	25	IXTA86N20T.....	19	IXTH16P60P.....	45	IXTJ4N150.....	8, 31
IXTA3N50D2.....	42	IXTA86N20X4.....	33	IXTH20N65X2.....	35	IXTJ6N150.....	8, 31
IXTA3N100D2.....	42	IXTA90N055T2.....	21	IXTH20P50P.....	45	IXTK3N250L.....	40
IXTA3N100D2HV.....	6, 42	IXTA90N075T2.....	21	IXTH22N50P.....	25	IXTK5N250.....	23
IXTA3N100P.....	25	IXTA94N20X4.....	33	IXTH24N50L.....	40	IXTK8N150L.....	40
IXTA3N120.....	31	IXTA96P085T.....	44	IXTH24N65X2.....	35	IXTK17N120L.....	40
IXTA3N120HV.....	6, 31	IXTA100N04T2.....	21	IXTH26N60P.....	25	IXTK22N100L.....	40
IXTA3N150HV.....	6, 31	IXTA110N055T2.....	21	IXTH26P20P.....	45	IXTK32P60P.....	45
IXTA4N65X2.....	35	IXTA120N04T2.....	21	IXTH30N25L2.....	41	IXTK40P50P.....	45

Part Number Alphanumeric Index

IXTK46N50L.....	40	IXTP2R4N120P.....	25	IXTP76P10T.....	44	IXTQ76N25T.....	19
IXTK60N50L2.....	41	IXTP3N50D2.....	42	IXTP80N10T.....	19	IXTQ82N25P.....	24
IXTK80N30L2.....	41	IXTP3N100D2.....	42	IXTP80N12T2.....	21	IXTQ86N20T.....	19
IXTK82N25P.....	24	IXTP3N100P.....	25	IXTP80N075L2.....	41	IXTQ86N25T.....	19
IXTK88N30P.....	25	IXTP3N120.....	31	IXTP86N20T.....	19	IXTQ88N30P.....	25
IXTK90N25L2.....	41	IXTP4N65X2.....	35	IXTP86N20X4.....	33	IXTQ96N15P.....	24
IXTK90P20P.....	45	IXTP4N70X2.....	37	IXTP90N055T2.....	21	IXTQ96N20P.....	24
IXTK100N25P.....	24	IXTP4N70X2M.....	37	IXTP90N075T2.....	21	IXTQ96N25T.....	19
IXTK102N30P.....	25	IXTP6N50D2.....	42	IXTP94N20X4.....	33	IXTQ100N25P.....	24
IXTK102N65X2.....	35	IXTP6N100D2.....	42	IXTP96P085T.....	44	IXTQ110N10P.....	24
IXTK110N20L2.....	41	IXTP06N120P.....	25	IXTP100N04T2.....	21	IXTQ120N15P.....	24
IXTK120N20P.....	24	IXTP08N50D2.....	42	IXTP110N055T2.....	21	IXTQ120N20P.....	24
IXTK120N25P.....	24	IXTP8N65X2.....	35	IXTP120N04T2.....	21	IXTQ130N10T.....	19
IXTK120N65X2.....	35	IXTP8N65X2M.....	35	IXTP120N20X4.....	33	IXTQ140N10P.....	24
IXTK120P20T.....	44	IXTP8N70X2.....	37	IXTP120N075T2.....	21	IXTQ150N15P.....	24
IXTK140N20P.....	24	IXTP8N70X2M.....	37	IXTP120P065T.....	44	IXTQ170N10P.....	24
IXTK140N30P.....	25	IXTP08N100D2.....	42	IXTP130N10T.....	19	IXTQ180N10T.....	19
IXTK150N15P.....	24	IXTP08N100P.....	25	IXTP140N055T2.....	21	IXTQ200N10T.....	19
IXTK170N10P.....	24	IXTP08N120P.....	25	IXTP140P05T.....	44	IXTR16P60P.....	45
IXTK170P10P.....	45	IXTP10N60P.....	25	IXTP160N04T2.....	21	IXTR20P50P.....	45
IXTK180N15P.....	24	IXTP10P15T.....	44	IXTP170N13X4.....	32	IXTR32P60P.....	45
IXTK200N10L2.....	41	IXTP10P50P.....	45	IXTP170N075T2.....	21	IXTR36P15P.....	45
IXTK200N10P.....	24	IXTP12N50P.....	25	IXTP180N10T.....	19	IXTR40P50P.....	45
IXTK210P10T.....	44	IXTP12N65X2.....	35	IXTP200N055T2.....	21	IXTR48P20P.....	45
IXTK240N075L2.....	41	IXTP12N65X2M.....	35	IXTP220N04T2.....	21	IXTR90P20P.....	45
IXTK400N15X4.....	32	IXTP12N70X2.....	37	IXTP230N075T2.....	21	IXTR102N65X2.....	35
IXTK550N055T2.....	21	IXTP12N70X2M.....	37	IXTP260N055T2.....	21	IXTR120P20T.....	44
IXTK600N04T2.....	21	IXTP14N60P.....	25	IXTP300N04T2.....	21	IXTR140P10T.....	44
IXTL2N450.....	23	IXTP15N50L2.....	41	IXTQ10P50P.....	45	IXTR170P10P.....	45
IXTL2N470.....	23	IXTP15P15T.....	44	IXTQ14N60P.....	25	IXTR200N10P.....	24
IXTN3N250L.....	40	IXTP16N50P.....	25	IXTQ16N50P.....	25	IXTR210P10T.....	44
IXTN5N250.....	23	IXTP18P10T.....	44	IXTQ18N60P.....	25	IXTT1N250HV.....	7, 23
IXTN8N150L.....	40	IXTP20N65X2.....	35	IXTQ22N50P.....	25	IXTT1N300P3HV.....	7, 23
IXTN17N120L.....	40	IXTP20N65X2M.....	35	IXTQ22N60P.....	25	IXTT1N450HV.....	7, 23
IXTN22N100L.....	40	IXTP24N65X2.....	35	IXTQ26N50P.....	25	IXTT2N170D2.....	42
IXTN30N100L.....	40	IXTP24N65X2M.....	35	IXTQ26P20P.....	45	IXTT2N300P3HV.....	7, 23
IXTN32P60P.....	45	IXTP24P085T.....	44	IXTQ30N50L2.....	41	IXTT02N450HV.....	7, 23
IXTN40P50P.....	45	IXTP26P10T.....	44	IXTQ30N50P.....	25	IXTT3N200P3HV.....	7, 23
IXTN46N50L.....	40	IXTP26P20P.....	45	IXTQ30N60L2.....	41	IXTT4N150HV.....	7, 31
IXTN60N50L2.....	41	IXTP28P065T.....	44	IXTQ30N60P.....	25	IXTT6N120.....	31
IXTN80N30L2.....	41	IXTP30N25L2.....	41	IXTQ32P20T.....	44	IXTT6N150.....	31
IXTN90N25L2.....	41	IXTP30N65X2.....	35	IXTQ34N65X2M.....	35	IXTT10N100D2.....	42
IXTN90P20P.....	45	IXTP32P05T.....	44	IXTQ36N30P.....	24	IXTT12N150HV.....	7, 31
IXTN102N65X2.....	35	IXTP32P20T.....	44	IXTQ36N50P.....	25	IXTT3N200P3HV.....	7, 23
IXTN110N20L2.....	41	IXTP34N65X2.....	35	IXTQ36P15P.....	45	IXTT4N150HV.....	7, 31
IXTN120P20T.....	44	IXTP36N30P.....	24	IXTQ40N50L2.....	41	IXTT6N120.....	31
IXTN170P10P.....	45	IXTP36P15P.....	45	IXTQ42N25P.....	24	IXTT6N150.....	31
IXTN200N10L2.....	41	IXTP42N25P.....	24	IXTQ44N50P.....	25	IXTT10N100D2.....	42
IXTN200N10T.....	19	IXTP44N10T.....	19	IXTQ44P15T.....	44	IXTT12N150HV.....	7, 31
IXTN210P10T.....	44	IXTP44P15T.....	44	IXTQ48N20T.....	19	IXTT16N20D2.....	42
IXTN240N075L2.....	41	IXTP48N20T.....	19	IXTQ48N65X2M.....	35	IXTT16N50D2.....	42
IXTN400N15X4.....	32	IXTP48P05T.....	44	IXTQ50N20P.....	24	IXTT16P60P.....	45
IXTN550N055T2.....	21	IXTP50N20P.....	24	IXTQ50N25T.....	19	IXTT20P50P.....	45
IXTN600N04T2.....	21	IXTP50N25T.....	19	IXTQ52N30P.....	24	IXTT26N50P.....	25
IXTP1N100P.....	25	IXTP52P10P.....	45	IXTQ52P10P.....	45	IXTT26N60P.....	25
IXTP1N120P.....	25	IXTP60N10T.....	19	IXTQ60N10T.....	19	IXTT30N50L2.....	41
IXTP1R4N100P.....	25	IXTP60N20T.....	19	IXTQ60N20L2.....	41	IXTT30N50P.....	25
IXTP1R4N120P.....	25	IXTP60N20X4.....	33	IXTQ60N20T.....	19	IXTT30N60L2.....	41
IXTP1R6N50D2.....	42	IXTP62N15P.....	24	IXTQ62N15P.....	24	IXTT34N65X2HV.....	7, 35
IXTP1R6N100D2.....	42	IXTP64N10L2.....	41	IXTQ64N25P.....	24	IXTT36N50P.....	25
IXTP2N65X2.....	35	IXTP70N075T2.....	21	IXTQ64N30P.....	25	IXTT40N50L2.....	41
IXTP2N100P.....	25	IXTP75N10P.....	24	IXTQ74N20P.....	24	IXTT44N25L2HV.....	7, 41
IXTP02N120P.....	25	IXTP76N25T.....	19	IXTQ75N10P.....	24	IXTT48P20P.....	45
						IXTT52N30P.....	24
						IXTT60N20L2.....	41
						IXTT64N25P.....	24
						IXTT68P20T.....	44
						IXTT69N30P.....	25
						IXTT74N20P.....	24

IXTT75N10L2	41	IXTY15P15T	44	IXXX160N65C4	52	IXYH40N120C3D1	55
IXTT80N20L	40	IXTY18P10T	44	IXXX200N60B3	50	IXYH40N120C4	53
IXTT82N25P	24	IXTY26P10T	44	IXXX200N60C3	50	IXYH40N120C4H1	53
IXTT88N30P	25	IXTY32P05T	44	IXXX200N65B4	52	IXYH50N65C3	51
IXTT90P10P	45	IXTY44N10T	19	IXXX300N60B3	50	IXYH50N65C3H1	51
IXTT96N15P	24	IXTY48P05T	44	IXXX300N60C3	50	IXYH50N120C3	55
IXTT96N20P	24	IXTY90N055T2	21	IXYA8N90C3D1	55	IXYH50N120C3D1	55
IXTT100N25P	24	IXXA50N60B3	50	IXYA8N250CHV	6, 54	IXYH55N120A4	53
IXTT110N10L2	41	IXXH30N60B3	50	IXYA12N250CHV	6, 54	IXYH55N120B4H1	53
IXTT110N10P	24	IXXH30N60B3D1	50	IXYA15N65C3D1	51	IXYH55N120C4	53
IXTT120N15P	24	IXXH30N60C3	50	IXYA20N65B3	51	IXYH55N120C4H1	53
IXTT140N10P	24	IXXH30N60C3D1	50	IXYA20N65C3	51	IXYH60N90C3	55
IXTT140N075L2HV	7, 41	IXXH30N65B4	52	IXYA20N65C3D1	51	IXYH75N65C3	51
IXTT140P10T	44	IXXH40N65B4	52	IXYA20N120A4HV	6, 53	IXYH75N65C3H1	51
IXTT170N10P	24	IXXH40N65B4H1	52	IXYA20N120B4HV	6, 53	IXYH80N90C3	55
IXTT220N20X4HV	33	IXXH50N60B3	50	IXYA20N120C3HV	6, 55	IXYH82N120C3	55
IXTT240N15X4HV	7	IXXH50N60B3D1	50	IXYA20N120C4HV	6, 53	IXYH85N120A4	53
IXTT360N055T2	21	IXXH50N60C3	50	IXYA30N120A4HV	6, 53	IXYH85N120C4	53
IXTT440N055T2	21	IXXH50N60C3D1	50	IXYA50N65C3	51	IXYH90N65A5	52
IXTT500N04T2	21	IXXH60N65B4	52	IXYB82N120C3H1	55	IXYH100N65A3	51
IXTU4N70X2	37	IXXH60N65B4H1	52	IXYF16N250CV1	14, 54	IXYH100N65B3	51
IXTU8N70X2	37	IXXH60N65C4	52	IXYF30N170CV1	54	IXYH100N65C3	51
IXTX1R4N450HV	9, 23	IXXH75N60B3	50	IXYF30N450	58	IXYH120N65A5	52
IXTX3N250L	40	IXXH75N60B3D1	50	IXYF40N450	14, 58	IXYH120N65B3	51
IXTX4N300P3HV	9, 23	IXXH75N60C3	50	IXYH8N250CHV	9, 54	IXYH120N65C3	51
IXTX5N250	23	IXXH75N60C3D1	50	IXYH8N250CV1HV	9, 54	IXYK30N170CV1	54
IXTX6N200P3HV	9, 23	IXXH80N65B4	52	IXYH10N170C	54	IXYK85N120C4H1	53
IXTX8N150L	40	IXXH80N65B4H1	52	IXYH10N170CV1	54	IXYK100N65C3D1	51
IXTX17N120L	40	IXXH100N60B3	50	IXYH12N250CHV	9, 54	IXYK100N120B3	55
IXTX22N100L	40	IXXH100N60C3	50	IXYH12N250CV1HV	9, 54	IXYK100N120C3	55
IXTX32P60P	45	IXXH110N65B4	52	IXYH16N170C	54	IXYK110N120A4	53
IXTX40P50P	45	IXXH110N65C4	52	IXYH16N170CV1	54	IXYK110N120B4	53
IXTX46N50L	40	IXXH140N65B4	52	IXYH16N250CV1HV	9, 54	IXYK110N120C4	53
IXTX60N50L2	41	IXXH140N65C4	52	IXYH20N65B3	51	IXYK120N120B3	55
IXTX80N30L2	41	IXXK100N60B3H1	50	IXYH20N65C3	51	IXYK120N120C3	55
IXTX90N25L2	41	IXXK100N60C3H1	50	IXYH20N120C3	55	IXYK140N90C3	55
IXTX90P20P	45	IXXK110N65B4H1	52	IXYH20N120C3D1	55	IXYK140N120A4	53
IXTX102N65X2	35	IXXK160N65B4	52	IXYH24N90C3	55	IXYK200N65B3	51
IXTX110N20L2	41	IXXK160N65C4	52	IXYH24N90C3D1	55	IXYK300N65A3	51
IXTX120P20T	44	IXXK200N60B3	50	IXYH24N170C	54	IXYL40N250CV1	54
IXTX170P10P	45	IXXK200N60C3	50	IXYH24N170CV1	54	IXYL50N170CV1	54
IXTX200N10L2	41	IXXK200N65B4	52	IXYH25N250CHV	9, 54	IXYL60N450	58
IXTX210P10T	44	IXXK300N60B3	50	IXYH30N65C3	51	IXYN30N170CV1	54
IXTX240N075L2	41	IXXK300N60C3	50	IXYH30N65C3H1	51	IXYN50N170CV1	54
IXTX550N055T2	21	IXXN100N60B3H1	50	IXYH30N120A4	53	IXYN80N90C3H1	55
IXTX600N04T2	21	IXXN110N65B4H1	52	IXYH30N120B4	53	IXYN82N120C3	55
IXTY1N100P	25	IXXN110N65C4H1	52	IXYH30N120C3	55	IXYN82N120C3H1	55
IXTY1R4N100P	25	IXXN200N60B3	50	IXYH30N120C3D1	55	IXYN85N120C4H1	53
IXTY1R4N120P	25	IXXN200N60B3H1	50	IXYH30N120C4	53	IXYN100N65A3	51
IXTY1R4N120PHV	5, 25	IXXN200N60C3H1	50	IXYH30N170C	54	IXYN100N65C3H1	51
IXTY1R6N50D2	42	IXXN200N65A4	52	IXYH30N450HV	9, 58	IXYN100N120B3H1	55
IXTY1R6N100D2	42	IXXN340N65B4	52	IXYH40N65B3	51	IXYN100N120C3	55
IXTY2N65X2	35	IXXP12N65B4	52	IXYH40N65B3D1	51	IXYN100N120C3H1	55
IXTY2N100P	25	IXXP12N65B4D1	52	IXYH40N65C3	51	IXYN110N120A4	53
IXTY02N120P	25	IXXP50N60B3	50	IXYH40N65C3H1	51	IXYN110N120B4H1	53
IXTY4N65X2	35	IXXQ30N60B3M	50	IXYH40N90C3	55	IXYN110N120C4	53
IXTY4N70X2	37	IXXR100N60B3H1	50	IXYH40N90C3D1	55	IXYN110N120C4H1	53
IXTY08N50D2	42	IXXR110N65B4H1	52	IXYH40N120A4	53	IXYN120N120C3	55
IXTY8N65X2	35	IXXX100N60B3H1	50	IXYH40N120B3	55	IXYN140N120A4	53
IXTY8N70X2	37	IXXX100N60C3H1	50	IXYH40N120B3D1	55	IXYN300N65A3	51
IXTY08N100D2	42	IXXX110N65B4H1	52	IXYH40N120B4	53	IXYP8N90C3	55
IXTY08N100P	25	IXXX140N65B4H1	52	IXYH40N120B4H1	53	IXYP8N90C3D1	55
IXTY10P15T	44	IXXX160N65B4	52	IXYH40N120C3	55	IXYP10N65C3	51

Part Number Alphanumeric Index

IXYP15N65C3.....	51	K1947ZD400.....	135	M0268SJ250.....	121	M0872LC180.....	123
IXYP15N65C3D1.....	51	K1947ZD450.....	135	M0280RC200.....	121	M0872LC210.....	123
IXYP20N65B3.....	51	K2095ZC360.....	135	M0280RC250.....	121	M0914LC200.....	119
IXYP20N65C3D1.....	51	K2095ZC420.....	135	M0280RJ200.....	121	M0914LC250.....	119
IXYP20N120A4.....	53	K2095ZD360.....	135	M0280RJ250.....	121	M0955LC200.....	123
IXYP20N120B4.....	53	K2095ZD420.....	135	M0280SC200.....	121	M0955LC250.....	123
IXYP20N120C3.....	55	Kxxx0yH.....	86	M0280SC250.....	121	M1010NC400.....	119
IXYP20N120C4.....	53	Kxxx0yU.....	86	M0280SJ200.....	121	M1010NC450.....	119
IXYP30N65C3.....	51	Kxxx1G.....	86	M0280SJ250.....	121	M1010ND400.....	119
IXYP30N120A4.....	53	Kxxx1GL.....	86	M0310YH300.....	122	M1010ND450.....	119
IXYP30N120C3.....	55	Kxxxzy.....	86	M0310YH350.....	122	M1022LC120.....	123
IXYP50N65C3.....	51	L		M0334RC120.....	121	M1022LC160.....	123
IXYP60N65A5.....	52	L01.....	85	M0334RC200.....	121	M1022LC200.....	123
IXYQ40N65C3D1.....	51	L0001HC600XXX.....	149	M0334RJ120.....	121	M1080LC100.....	123
IXYR50N120C3D1.....	55	L0001NC600XXX.....	149	M0334RJ200.....	121	M1080LC120.....	123
IXYR100N120C3.....	55	L0001QC600XXX.....	149	M0334SC120.....	121	M1102NC500.....	123
IXYT12N250CV1HV.....	7, 54	L0001TC600XXX.....	149	M0334SC200.....	121	M1102NC600.....	123
IXYT20N120C3D1HV.....	7, 55	L0001YC600XXX.....	149	M0334SJ120.....	121	M1102ND500.....	123
IXYT25N250CHV.....	7, 54	L0001ZF600XXX.....	149	M0334SJ200.....	121	M1102ND600.....	123
IXYT30N65C3H1HV.....	7, 51	LJxx04xx.....	86	M0336RA120.....	121	M1104NC400.....	123
IXYT30N450HV.....	7, 58	LJxx06xx.....	86	M0336RA140.....	121	M1104NC450.....	123
IXYT40N120A4HV.....	7, 53	LJxx08xx.....	86	M0336SA120.....	121	M1104ND400.....	123
IXYT55N120A4HV.....	7, 53	LSIC1MO170E0750.....	39	M0336SA140.....	121	M1104ND450.....	123
IXYT80N90C3.....	55	LSIC1MO170H0750.....	39	M0347WC160.....	122	M1163NC400.....	119
IXYT85N120A4HV.....	7, 53	LSIC1MO170T0750.....	39	M0347WC200.....	122	M1163NC450.....	119
IXYX25N250CV1.....	54	LW0428RE250.....	118	M0347WC250.....	122	M1163ND400.....	119
IXYX25N250CV1HV.....	9, 54	Lx01Ex.....	85	M0358WC120.....	122	M1163ND450.....	119
IXYX30N170CV1.....	54	LX8.....	85	M0358WC180.....	122	M1242NC260.....	123
IXYX40N250CHV.....	9, 54	LX507MBB.....	85	M0367WC140.....	122	M1242NC360.....	123
IXYX40N450HV.....	9, 58	LxNx.....	85	M0367WC220.....	122	M1242ND260.....	123
IXYX50N170C.....	54	Lxx04xx.....	85	M0367WC280.....	122	M1242ND360.....	123
IXYX100N65C3D1.....	51	Lxx06xx.....	85	M0371YH350.....	122	M1494NC160.....	123
IXYX100N120B3.....	55	Lxx08xx.....	85	M0371YH450.....	122	M1494NC250.....	123
IXYX100N120C3.....	55	LxX8Ex.....	85	M0433WC120.....	122	M1494ND160.....	123
IXYX110N120A4.....	53	Lxx08xx.....	85	M0433WC160.....	122	M1494ND250.....	123
IXYX110N120B4.....	53	LxXx.....	85	M0433WC200.....	122	M1494NK160.....	123
IXYX110N120C4.....	53	M		M0437WC080.....	122	M1494NK250.....	123
IXYX120N120B3.....	55	M0130RL200.....	121	M0437WC140.....	122	M1502NC200.....	119
IXYX120N120C3.....	55	M0130RL250.....	121	M0451YC120.....	122	M1502NC250.....	119
IXYX140N90C3.....	55	M0130RM200.....	121	M0451YC160.....	122	M1502ND200.....	119
IXYX140N120A4.....	53	M0130RM250.....	121	M0451YC200.....	122	M1502ND250.....	119
IXYX200N65B3.....	51	M0130SL200.....	121	M0588LC400.....	119	M1565VC400.....	123
IXYX300N65A3.....	51	M0130SL250.....	121	M0588LC450.....	119	M1565VC450.....	123
IXYY8N90C3.....	55	M0130SM200.....	121	M0659LC400.....	122	M1565VF400.....	123
K		M0130SM250.....	121	M0659LC450.....	122	M1565VF450.....	123
K2xx0yHU.....	86	M0139RL120.....	121	M0710LC560.....	122	M1583VC400.....	119
K0443LC600.....	134	M0139RL180.....	121	M0710LC600.....	122	M1583VC450.....	119
K0443LC650.....	134	M0139RM120.....	121	M0736LC400.....	122	M1583VF400.....	119
K0769NC600.....	134	M0139RM180.....	121	M0736LC450.....	122	M1583VF450.....	119
K0769NC650.....	134	M0139SL120.....	121	M0759YC120.....	122	M1609NC200.....	120
K0890NC360.....	134	M0139SL180.....	121	M0759YC160.....	122	M1609NC260.....	120
K0890NC420.....	134	M0139SM120.....	121	M0759YH120.....	122	M1609ND200.....	120
K1121NC320.....	134	M0139SM180.....	121	M0759YH160.....	122	M1609ND260.....	120
K1121NC360.....	134	M0225YH300.....	122	M0790YC200.....	119	M1858NC100.....	123
K1197NC280.....	134	M0225YH360.....	122	M0790YC250.....	119	M1858NC120.....	123
K1197NC320.....	134	M0225YH450.....	122	M0790YH200.....	119	M1858ND100.....	123
K1351VF600.....	134	M0268RC200.....	121	M0790YH250.....	119	M1858ND120.....	123
K1351VF620.....	134	M0268RC250.....	121	M0859LC140.....	122	M2273VC300.....	120
K1351VF640.....	134	M0268RJ200.....	121	M0859LC180.....	122	M2273VC360.....	120
K1351VF650.....	134	M0268RJ250.....	121	M0863LC260.....	123	M2273VF300.....	120
K1947ZC400.....	134	M0268SC200.....	121	M0863LC300.....	123	M2273VF360.....	120
K1947ZC450.....	135	M0268SC250.....	121	M0863LC360.....	123	M2322ZC300.....	123
		M0268SJ200.....	121	M0872LC140.....	123	M2322ZC400.....	123

M2322ZD300	123	MBRF20100CTP	64	MCMA110P1800TA	97	MDD95	91
M2322ZD400	123	MBRF20150CT	65	MCMA110PD1200TB	94	MDD142	91
M2325HA400	120	MBRF20200CT	65	MCMA110PD1600TB	94	MDD172	91
M2325HA450	120	MBRF20200CTR	65	MCMA110PD1800TB	94	MDD175	91
M2408NC020	120	MBRF30100CTP	64	MCMA140P1200TA	97	MDD200	91
M2408NC060	120	MBRF30150CT	65	MCMA140P1400TA	97	MDD255	91
M2408ND020	120	MBRF30200CT	65	MCMA140P1600TA	97	MDD310	92
M2408ND060	120	MCC19	96	MCMA140P1800TA	97	MDD310-12N1	92
M2413VC200	123	MCC19-08io1B	96	MCMA140PD1200TB	94	MDD312	92
M2413VC250	123	MCC21	96	MCMA140PD1600TB	94	MDMA25P1200TG	90
M2413VF200	123	MCC26	96	MCMA140PD1800TB	94	MDMA25P1600TG	90
M2413VF250	123	MCC44	96	MCMA160P1600YA	97	MDMA25P1800TG	90
M2505MC220	123	MCC56	96, 97	MCMA160P1800YA	97	MDMA35P1200TG	90
M2505MC250	123	MCC56-08io8B	97	MCMA200P1600SA	98	MDMA35P1600TG	90
M2639ZC360	120	MCC72	97	MCMA200P1600YA	98	MDMA35P1800TG	90
M2639ZC420	120	MCC94	97	MCMA200P1800YA	98	MDMA50P1200TG	90
M2639ZD360	120	MCC95	97	MCMA260P1600YA	98	MDMA50P1600TG	90
M2639ZD420	120	MCC132	97	MCMA260P1800YA	98	MDMA50P1800TG	90
M2698ZC250	120	MCC161	97	MCMA265P1600KA	98	MDMA60UC1600VC	108
M2698ZC280	120	MCC162	97	MCMA265P1800KA	98	MDMA65P1200TG	90
M2698ZC350	120	MCC200	98	MCMA280P1600PTSF	98	MDMA65P1600TG	90
M2698ZD250	120	MCC224	98	MCMA400P1600PTSF	98	MDMA65P1800TG	90
M2698ZD280	120	MCC225	98	MCMA450UH1600TEH	108	MDMA85P1200TG	90
M2698ZD350	120	MCC255	98	MCMA550P1600PTSF	98	MDMA85P1600TG	90
M2837VC180	120	MCC310	98	MCMA650MT1400NKD	84	MDMA85P1800TG	90
M2837VC250	120	MCC312	98	MCMA650MT1800NKD	84	MDMA110P1200TG	91
M2837VF180	120	MCD26	93	MCMA700P1600CA	98	MDMA110P1600TG	91
M2837VF250	120	MCD40	93	MCMA700P1600NCA	98	MDMA110P1800TG	91
M3560TJ420	123	MCD44	93	MCMA700P1800CA	98	MDMA120U1600VA	105
M3560TJ450	123	MCD56	93	MCMA700P1800NCA	98	MDMA140P1200TG	91
M3770ZC200	120	MCD72	93	MCNA40P2200TA	96	MDMA140P1600TG	91
M3770ZC240	120	MCD94	94	MCNA40PD2200TB	93	MDMA140P1800TG	91
M3770ZC300	120	MCD95	94	MCNA55P2200TA	96	MDMA150U1600VA	105
M3770ZD200	120	MCD132	94	MCNA55PD2200TB	93	MDMA180P1600YD	91
M3770ZD240	120	MCK200	98	MCNA75P2200TA	97	MDMA200P1600SA	91
M3770ZD300	120	MCL10P1200LB	11	MCNA75PD2200TB	94	MDMA210P1600YD	91
M4305TJ240	123	MCMA25P1200TA	96	MCNA95P2200TA	97	MDMA280P1600YD	91
M4305TJ280	123	MCMA25P1600TA	96	MCNA95PD2200TB	94	MDMA300P1600PTSF	91
MBR1045	64	MCMA25PD1200TB	93	MCNA120P2200TA	97	MDMA360UC1600TED	108
MBR1060CTL	64	MCMA25PD1600TB	93	MCNA120PD2200TB	94	MDMA380P1600KC	92
MBR2060CT	64	MCMA35P1200TA	96	MCNA150P2200YA	97	MDMA380P1800KC	92
MBR6045WT	64	MCMA35P1600TA	96	MCNA180P2200YA	98	MDMA425P1600PTSF	92
MBR10100CT	64	MCMA35PD1200TB	93	MCNA220P2200YA	98	MDMA450U1600PTEH	106
MBR10150CT	65	MCMA35PD1600TB	93	MCNA250P2200PTSF	98	MDMA600P1600PTSF	92
MBR10200CT	65	MCMA50P1200TA	96	MCNA360P2200PTSF	98	MDMA660U1600PTEH	106
MBR20100CTP	64	MCMA50P1600TA	96	MCNA500P2200PTSF	98	MDMA700P1600CC	92
MBR20150CT	65	MCMA50PD1200TB	93	MCNA650P2200CA	98	MDMA700P1800CC	92
MBR40100WT	64	MCMA50PD1600TB	93	MCO25	99	MDMA900U1600PTEH	106
MBRB1060CT	64	MCMA65P1200TA	97	MCO25-12io1	99	MDNA25P2200TG	90
MBRB2060CT	64	MCMA65P1600TA	97	MCO50	99	MDNA35P2200TG	90
MBRB10100CT	64	MCMA65P1800TA	97	MCO75	99	MDNA50P2200TG	90
MBRB20100CT	64	MCMA65PD1200TB	93	MCO100	99	MDNA65P2200TG	90
MBRD10100CT	64	MCMA65PD1600TB	93	MCO150	99	MDNA85P2200TG	90
MBRD10150CT	65	MCMA65PD1800TB	93	MCO450	99	MDNA110P2200TG	91
MBRD10200CT	65	MCMA85P1200TA	97	MCO500	99	MDNA140P2200TG	91
MBRF1060CTL	64	MCMA85P1600TA	97	MCO600	99	MDNA180P2200YD	91
MBRF2045CT	64	MCMA85P1800TA	97	MCR12DSx	82	MDNA210P2200YD	91
MBRF2060CT	64	MCMA85PD1200TB	94	MDA95	91	MDNA240U2200ED	106
MBRF3060CT	64	MCMA85PD1600TB	94	MDD26	90	MDNA280P2200YD	91
MBRF10100CTL	64	MCMA85PD1800TB	94	MDD44	90	MDNA300P2200PTSF	91
MBRF10100CTR	64	MCMA110P1200TA	97	MDD56	90	MDNA380P2200KC	92
MBRF10150CTL	65	MCMA110P1600TA	97	MDD72	91	MDNA425P2200PTSF	92
MBRF10200CT	65	MCMA110P1600VA	97	MDD72-08N1B	91	MDNA600P2200PTSF	92

Part Number Alphanumeric Index

MDNA660U2200PTEH.....	106	N0882NC450.....	127	N2154JK060.....	128	N3533ZD180.....	129
MDNA700P2200CC.....	92	N0910LC200.....	127	N2172ZC420.....	128	N3533ZD220.....	129
MDO500.....	92	N0910LC260.....	127	N2172ZC450.....	128	N3565HA160.....	129
MDO600.....	92	N0910LC280.....	127	N2172ZD420.....	128	N3565HA180.....	129
MEA75.....	74	N1010NC300.....	127	N2172ZD450.....	128	N3597ML020.....	129
MEA95.....	74	N1010NC380.....	127	N2191ML160.....	128	N3597ML040.....	129
MEA250.....	74	N1052LC200.....	127	N2191ML180.....	128	N3597ML060.....	129
MEA300.....	74	N1052LC220.....	127	N2293VC180.....	128	N3620TE320.....	129
MEE75.....	74	N1114LC120.....	127	N2293VC220.....	128	N3620TE360.....	129
MEE95.....	74	N1114LC180.....	127	N2293VF180.....	128	N3620TJ320.....	129
MEE250.....	74	N1132NC300.....	127	N2293VF220.....	128	N3620TJ360.....	129
MEE300.....	74	N1132NC340.....	127	N2367MK200.....	128	N3790TE240.....	129
MEK75.....	74	N1132NC360.....	127	N2367MK220.....	128	N3790TE280.....	129
MEK95.....	74	N1159NC380.....	127	N2418ZC300.....	128	N3790TJ240.....	130
MEK150-04DA.....	74	N1159NC420.....	127	N2418ZC360.....	128	N3790TJ280.....	130
MEK250.....	74	N1174JK200.....	127	N2418ZD300.....	128	N3880ZD160.....	130
MEK300.....	74	N1174JK220.....	127	N2418ZD360.....	128	N3880ZD180.....	130
MEK350.....	74	N1263JK160.....	127	N2500VC120.....	129	N3904HK200.....	130
MEK600.....	74	N1263JK180.....	127	N2500VC160.....	129	N3904HK220.....	130
MEO450.....	74	N1351VC400.....	127	N2500VF120.....	129	N3930ZC120.....	130
MEO500.....	74	N1351VC450.....	127	N2500VF160.....	129	N3930ZC160.....	130
MEO550-02DA.....	74	N1351VF400.....	127	N2520ML080.....	129	N3930ZD120.....	130
MMIX1F420N10T.....	11	N1351VF450.....	127	N2520ML120.....	129	N3930ZD160.....	130
MMIX1F520N075T2.....	11, 22	N1366JK080.....	127	N2520ML140.....	129	N4085ZC080.....	130
MMIX1H60N150V1.....	12	N1366JK120.....	127	N2543ZC240.....	129	N4085ZC120.....	130
MMIX1T500N20X4.....	11	N1366JK140.....	127	N2543ZC300.....	129	N4085ZD080.....	130
MMIX1T600N04T2.....	11, 22	N1449QL200.....	127	N2543ZD240.....	129	N4085ZD120.....	130
MMIX1Y82N120C3H1.....	11	N1467NC200.....	127	N2543ZD300.....	129	N4165EE420.....	130
MMIX4B22N300.....	11	N1467NC260.....	127	N2593MK160.....	129	N4165EE450.....	130
MMO62.....	109	N1547NC160.....	127	N2593MK180.....	129	N4316MK020.....	130
MMO62-12io6.....	109	N1547NC200.....	127	N2600MC160.....	129	N4316MK040.....	130
MMO74.....	109	N1581QL160.....	127	N2600MC180.....	129	N4316MK060.....	130
MMO90.....	109	N1581QL180.....	127	N2825TE420.....	129	N4340TE180.....	130
MMO110.....	109	N1651QK200.....	127	N2825TE450.....	129	N4340TE220.....	130
MMO140.....	109	N1651QK220.....	127	N2825TJ420.....	129	N4340TJ180.....	130
MMO175.....	109	N1661VC300.....	127	N2825TJ450.....	129	N4340TJ180MBR.....	141
MMO230.....	109	N1661VC360.....	127	N2830HE260.....	129	N4340TJ220.....	130
MPK95.....	74	N1661VF300.....	127	N2830HE280.....	129	N4340TJ220MBR.....	141
MS0690J-D1TE.....	85	N1661VF360.....	127	N2900QL020.....	129	N4472HK160.....	130
MXB12R600DPHFC.....	14	N1718NC120.....	127	N2900QL040.....	129	N4472HK180.....	130
		N1718NC180.....	127	N2900QL060.....	129	N4650EA420.....	130
N		N1718NC200.....	127	N3012ZC200.....	129	N4650EA450.....	130
N0180SH120.....	126	N1725MC360.....	128	N3012ZC260.....	129	N4845EE320.....	130
N0180SH160.....	126	N1802NC120.....	128	N3012ZD200.....	129	N4845EE360.....	130
N0335SC120.....	126	N1802NC160.....	128	N3012ZD260.....	129	N4940HK120.....	130
N0335SC160.....	126	N1806QK160.....	128	N3022MK080.....	129	N4940HK140.....	130
N0392WC120.....	126	N1806QK180.....	128	N3022MK120.....	129	N5320FE420.....	130
N0392WC160.....	126	N1817QL080.....	128	N3022MK140.....	129	N5320FE450.....	130
N0416SC040.....	126	N1817QL120.....	128	N3029ZC240.....	129	N5715EE240.....	131
N0416SC080.....	126	N1817QL140.....	128	N3029ZC280.....	129	N5715EE280.....	131
N0606YC200.....	126	N2015ML200.....	128	N3029ZD240.....	129	N5910FA420.....	131
N0606YC250.....	126	N2015ML220.....	128	N3029ZD280.....	129	N5910FA450.....	131
N0616LC400.....	126	N2055HE420.....	128	N3165HA260.....	129	N6012ZD020.....	131
N0616LC450.....	126	N2055HE450.....	128	N3165HA280.....	129	N6012ZD040.....	131
N0634LC380.....	126	N2055MC260.....	128	N3175HE160.....	129	N6012ZD060.....	131
N0634LC420.....	126	N2055MC280.....	128	N3175HE180.....	129	N6405EA240.....	131
N0646LC300.....	126	N2083QK080.....	128	N3229QK020.....	129	N6405EA280.....	131
N0646LC360.....	126	N2083QK120.....	128	N3229QK040.....	129	N6974HK020.....	131
N0676YC120.....	127	N2083QK140.....	128	N3229QK060.....	129	N6974HK040.....	131
N0676YC180.....	127	N2086NC060.....	128	N3533ZC140.....	129	N6974HK060.....	131
N0734YC120.....	127	N2086NC100.....	128	N3533ZC180.....	129	N7585FE240.....	131
N0734YC160.....	127	N2154JK020.....	128	N3533ZC220.....	129	N7585FE280.....	131
N0882NC400.....	127	N2154JK040.....	128	N3533ZD140.....	129	N7905FE180.....	131

N7905FE220.....	131	R0487YC12E.....	136	R1124NC20M.....	137	R1446NC12F.....	138
N8440FA240.....	131	R0487YC14D.....	136	R1124NC21J.....	137	R1448NC14H.....	138
N8440FA280.....	131	R0487YC14E.....	136	R1124NC21K.....	137	R1448NC14J.....	138
N8800FA180.....	131	R0577YC12C.....	136	R1124NC21L.....	137	R1448NC18H.....	138
N8800FA220.....	131	R0577YC12D.....	136	R1124NC21M.....	137	R1448NC18J.....	138
NYC0102B (200V).....	82	R0577YC12E.....	136	R1127NC32P.....	137	R1448NC20H.....	138
Q							
Q6008LTH1LED.....	86	R0633YC12D.....	136	R1127NC32R.....	137	R1448NC20J.....	138
Q6008xH1LED.....	85	R0633YC12E.....	136	R1127NC32S.....	137	R1448NC20K.....	138
Q6012LTH1LED.....	86	R0633YC12F.....	136	R1127NC32T.....	137	R1448NC20L.....	138
Q6012xH1LED.....	85	R0717LC14G.....	136	R1127NC34R.....	137	R1448NC20M.....	138
Q6016LH1LED.....	85	R0717LC14H.....	136	R1127NC34S.....	137	R1605MC20E.....	138
Q6035NAH5.....	85	R0717LC16G.....	136	R1127NC34T.....	137	R1605MC20F.....	138
QJxx04xx.....	86	R0717LC16H.....	136	R1127NC36R.....	137	R1605MC20G.....	138
QJxx06xHx.....	86	R0736LC20J.....	136	R1127NC36S.....	137	R1605MC20H.....	138
QJxx06xx.....	86	R0736LC20K.....	136	R1127NC36T.....	137	R1605MC20J.....	138
QJxx08xHx.....	86	R0736LC22J.....	136	R1158NC26N.....	137	R1605MC22E.....	138
QJxx08xx.....	86	R0736LC22K.....	136	R1158NC26P.....	137	R1605MC22F.....	138
QJxx10xHx.....	86	R0736LC25J.....	136	R1158NC26T.....	137	R1605MC22G.....	138
QJxx10xx.....	86	R0736LC25K.....	136	R1178NC14E.....	137	R1605MC22H.....	138
QJxx12xHx.....	86	R0736LC25L.....	136	R1178NC14F.....	137	R1605MC22J.....	138
QJxx16xHx.....	86	R0736LC25M.....	136	R1178NC14G.....	137	R1700MC18E.....	138
QJxx25xHx.....	86	R0809LC10A.....	136	R1211NC12C.....	137	R1700MC18F.....	138
QJxx30LH4.....	86	R0809LC10B.....	136	R1211NC12D.....	137	R1700MC18G.....	138
QJxx40xx.....	86	R0830LC12C.....	136	R1211NC12E.....	137	R1700MC18H.....	138
QSxx04xHx.....	85	R0830LC12D.....	136	R1271NC12B.....	137	R1700MC18J.....	138
QVxx12xHx.....	86	R0830LC12E.....	136	R1271NC12C.....	137	R1700MC21E.....	138
QVxx16xHx.....	86	R0830LC12F.....	136	R1271NC12D.....	137	R1700MC21F.....	138
Qx01Ex.....	85	R0830LC14C.....	136	R1271NC12E.....	137	R1700MC21G.....	138
QxNx.....	85	R0830LC14D.....	136	R1275NC18L.....	137	R1700MC21H.....	139
Qxx04LT.....	86	R0830LC14E.....	136	R1275NC18M.....	137	R1700MC21J.....	139
Qxx04xx.....	85	R0830LC14F.....	136	R1275NC20L.....	137	R1955MC14D.....	139
Qxx06LT.....	86	R0878LC18K.....	136	R1275NC20M.....	137	R1955MC14E.....	139
Qxx06LTH.....	86	R0878LC18L.....	136	R1275NC21L.....	137	R1955MC14F.....	139
Qxx06xHx.....	85	R0878LC18M.....	136	R1275NC21M.....	137	R1955MC16D.....	139
Qxx06xx.....	85	R0878LC20K.....	136	R1279NC22J.....	137	R1955MC16E.....	139
QxX8Ex.....	85	R0878LC20L.....	136	R1279NC22K.....	137	R1955MC16F.....	139
Qxx08LT.....	86	R0878LC20M.....	136	R1279NC22L.....	137	R2075MC12A.....	139
Qxx08LTH.....	86	R0878LC21K.....	136	R1279NC22M.....	137	R2075MC12B.....	139
Qxx08xHx.....	85	R0878LC21L.....	136	R1279NC25J.....	137	R2075MC12C.....	139
Qxx08xx.....	85	R0878LC21M.....	136	R1279NC25K.....	137	R2295HA22F.....	139
Qxx10LT.....	86	R0929LC12A.....	136	R1279NC25L.....	137	R2295HA22H.....	139
Qxx10LTH.....	86	R0929LC12B.....	136	R1279NC25M.....	137	R2475ZC28M.....	139
Qxx10xHx.....	85	R0929LC12C.....	136	R1280NC21J.....	137	R2475ZC28N.....	139
Qxx10xx.....	85	R0964LC10C.....	137	R1280NC21K.....	137	R2475ZC28R.....	139
Qxx12xHx.....	85	R0964LC10D.....	137	R1280NC21L.....	138	R2475ZD28M.....	139
Qxx15LT.....	86	R0964LC10E.....	137	R1280NC21M.....	138	R2475ZD28N.....	139
Qxx15LTH.....	86	R0964LC12C.....	137	R1280NC22J.....	138	R2475ZD28R.....	139
Qxx15xx.....	85	R0964LC12D.....	137	R1280NC22K.....	138	R2619ZC18J.....	139
Qxx16xHx.....	85	R0964LC12E.....	137	R1280NC22L.....	138	R2619ZC18K.....	139
Qxx25xHx.....	85	R0990LC08A.....	137	R1280NC22M.....	138	R2619ZC18L.....	139
Qxx25xx.....	85	R0990LC08B.....	137	R1280NC25J.....	138	R2619ZC20J.....	139
Qxx30xHx.....	85	R0990LC08C.....	137	R1280NC25K.....	138	R2619ZC20K.....	139
Qxx35xHx.....	85	R1045NC28L.....	137	R1280NC25L.....	138	R2619ZC20L.....	139
Qxx40xx.....	85	R1045NC28M.....	137	R1280NC25M.....	138	R2619ZC21J.....	139
QxXx.....	85	R1045NC32L.....	137	R1331NC10B.....	138	R2619ZC21K.....	139
R							
R0472YC12E.....	136	R1045NC32M.....	137	R1331NC10C.....	138	R2619ZC21L.....	139
R0472YC12F.....	136	R1124NC18J.....	137	R1331NC10D.....	138	R2619ZC25J.....	139
R0472YC16E.....	136	R1124NC18K.....	137	R1331NC12B.....	138	R2619ZC25K.....	139
R0472YC16F.....	136	R1124NC18L.....	137	R1331NC12C.....	138	R2619ZC25L.....	139
R0487YC12D.....	136	R1124NC18M.....	137	R1331NC12D.....	138	R2619ZD18J.....	139
		R1124NC20J.....	137	R1446NC12C.....	138	R2619ZD18K.....	139
		R1124NC20K.....	137	R1446NC12D.....	138	R2619ZD18L.....	139
		R1124NC20L.....	137	R1446NC12E.....	138	R2619ZD20J.....	139

Part Number Alphanumeric Index

R2619ZD20K.....	139	SJxx06xxx.....	83	Sxx10xxx.....	82	VBO130	103
R2619ZD20L.....	139	SJxx08xxx.....	83	Sxx12xx.....	82	VBO160	103
R2619ZD21J.....	139	SJxx10xxx.....	83	Sxx16xx.....	82	VCO132.....	99
R2619ZD21K.....	139	SJxx12xx.....	83	Sxx20xx.....	82	VCO180	99
R2619ZD21L.....	139	SJxx16xx.....	83	Sxx25xx.....	82	VGO36.....	103
R2619ZD25J.....	139	SJxx20xx.....	83	Sxx35x.....	83	VHF25.....	103
R2619ZD25K.....	139	SJxx20xxA.....	83	Sxx40x.....	83	VHF25-08io7.....	103
R2620ZC22J.....	139	SJxx25xx.....	83	Sxx55x.....	83	VHFD37.....	103
R2620ZC22K.....	139	SJxx25xxA.....	83	Sxx65x.....	83	VTO39.....	108
R2620ZC22L.....	139	SJxx32xx.....	83	Sxx70x.....	83	VTO39-08ho7.....	108
R2620ZC25J.....	139	SJxx32xxA.....	83	T		VUC36.....	108
R2620ZC25K.....	139	SJxx40xx.....	83	T0115QB45G.....	142	VUC36-12go2.....	108
R2620ZC25L.....	139	SJxx40xxA.....	83	T0240NB45E.....	142	VUE22.....	101
R2620ZD22J.....	139	SK230.....	82	T0258HF65G.....	142	VUE35.....	101
R2620ZD22K.....	139	SRUK208x (1200V).....	82	T0340VB45G.....	142	VUE50.....	101
R2620ZD22L.....	139	STx802U2Sx.....	82	T0385HF65E.....	142	VUE75.....	101
R2620ZD25J.....	139	SV6050xAx.....	83	T0510VB45E.....	142	VUE130.....	101
R2620ZD25K.....	139	SV6050xx.....	83	T0600TB45A.....	142	VUO25.....	104
R2620ZD25L.....	139	SVxx12xx.....	83	T0800EB45G.....	142	VUO28.....	104
R2714ZC14H.....	139	SVxx12xxQ.....	83	T0800TB45E.....	142	VUO34.....	104
R2714ZC14J.....	139	SVxx16xx.....	83	T0900AF65E.....	142	VUO36.....	104
R2714ZC18H.....	139	SVxx16xxQ.....	83	T0900DF65A.....	142	VUO52.....	104
R2714ZC18J.....	139	SVxx20xx.....	83	T0900EB45A.....	142	VUO62.....	104, 105
R2714ZC18K.....	139	SVxx20xxQ.....	83	T1200EB45E.....	142	VUO62-08NO7.....	104
R2714ZD14H.....	139	SVxx25xx.....	83	T1290BF65A.....	142	VUO64.....	105
R2714ZD14J.....	139	SVxx25xxQ.....	83	T1375DF65E.....	142	VUO68.....	105
R2714ZD14K.....	139	Sx01E.....	82	T1600GB45G.....	142	VUO80.....	105
R2714ZD18H.....	140	Sx02xSx.....	82	T1800GB45A.....	142	VUO82.....	105
R2714ZD18J.....	140	SXB1265FB.....	146	T1890BF65E.....	142	VUO84.....	105
R2714ZD18K.....	140	SXB1375B.....	146	T2000BB45G.....	142	VUO86.....	105
R3115TJ24J.....	140	SXB1645FB.....	146	T2322B.....	85	VUO98.....	105
R3115TJ24K.....	140	SXB1764FG.....	146	T2400GB45E.....	142	VUO105.....	105
R3115TJ28J.....	140	SXB1920G.....	146	T2960BB45E.....	142	VUO110.....	105
R3115TJ28K.....	140	SXB2096B.....	146	TCR22.....	82	VUO121.....	105
R3370ZC12C.....	140	SXB2167FB.....	146	U		VUO122.....	105
R3370ZC12D.....	140	SXB2324FG.....	146	UGB3132AD.....	109	VUO160.....	106
R3370ZC12E.....	140	SXB2939G.....	146	UGB6124AG.....	109	VUO162.....	106
R3370ZD12C.....	140	SXB3120FG.....	146	UGD6123AG.....	109	VUO190.....	106
R3370ZD12D.....	140	SXB3442B.....	146	UGD8124AG.....	109	VUO192.....	106
R3370ZD12E.....	140	SXB3529HEXT.....	146	UGE0221AY4.....	109	VVZ39.....	108
R4680EA24K.....	140	SXB3840HEX.....	146	UGE0421AY4.....	109	VVZ39-08ho7.....	108
R4680EA24L.....	140	SXB4264B.....	146	UGE1112AY4.....	109	VVZ40.....	108
R4680EA24M.....	140	SXB4649HEXT.....	146	UGE3126AY4.....	109	VVZ110.....	108
R4680EA28K.....	140	SXB4869G.....	146	V		VVZ175.....	108
R4680EA28L.....	140	SXB5877HEX.....	146	VBE17.....	101	VW2x60.....	109
R4680EA28M.....	140	SXB5993G.....	146	VBE17-06NO7.....	101	VWO35.....	109
R5145FA42V.....	140	SXB6240HEXT.....	146	VBE26.....	101	W	
R5145FA42W.....	140	SXB9737HEX.....	146	VBE55.....	101	W106CEC240.....	118
R5145FA45V.....	140	SXB11987HEX.....	146	VBE60.....	101	W106CEC280.....	118
R5145FA45W.....	140	SXC1076FB.....	148	VBE100.....	101	W108CED180.....	118
R5370EA18J.....	140	SXC1195FR.....	148	VBO21.....	102	W108CED220.....	118
R5370EA18K.....	140	SXC1318FB.....	148	VBO22.....	102	W121CEC180.....	118
R5370EA22J.....	140	SXC1464FR.....	148	VBO36.....	102	W121CEC220.....	118
R5370EA22K.....	140	SXC1517FG.....	148	VBO40.....	102	W0428RE280.....	118
S		SXC1609FB.....	148	VBO52.....	102	W0428RE320.....	118
S8X5ECSx.....	82	SXC1788FR.....	148	VBO54.....	102	W0428RF250.....	118
S802CSx.....	82	SXC1871FG.....	148	VBO68.....	102	W0428RF280.....	118
S802xSx.....	82	SXC2319FG.....	148	VBO72.....	102	W0428RF320.....	118
S4040xQx.....	83	Sxx04xSx.....	82	VBO78.....	103	W0428SE250.....	118
S6002xS.....	82	Sxx06xxx.....	82	VBO78-08NO7.....	103	W0428SE280.....	118
S8016xAx.....	83	Sxx8BBSx.....	82	VBO88.....	103	W0428SE320.....	118
SJxx04xSx.....	83	Sxx08xxx.....	82			W0428SF250.....	118


W0428SF280.....	118	W2115MC600.....	115	W4205TE520.....	116	W6672TJ350.....	117
W0428SF320.....	118	W2134NC360.....	115	W4205TE560.....	116	W7045MC030.....	117
W0503RC160.....	118	W2134NC400.....	115	W4205TE600.....	116	W7045MC060.....	117
W0503RC200.....	118	W2624NC240.....	115	W4205TJ520.....	116	W8405ZC100.....	117
W0503RC240.....	118	W2624NC280.....	115	W4205TJ560.....	116	W8405ZC140.....	117
W0503SC160.....	118	W2624ND240.....	115	W4205TJ600.....	116	W8405ZD100.....	117
W0503SC200.....	118	W2624ND280.....	115	W4534NC030.....	116	W8405ZD140.....	117
W0503SC240.....	118	W2820VC420.....	115	W4534NC060.....	116	W8570TE180.....	118
W0507YH420.....	114	W2820VC450.....	115	W4534ND030.....	116	W8570TE220.....	118
W0507YH450.....	114	W2820VF420.....	115	W4534ND060.....	116	W8570TJ180.....	117
W0642WC160.....	114	W2820VF450.....	115	W4693QK050.....	116	W8570TJ180MBR.....	141
W0642WC200.....	114	W2830HE520.....	115	W4693QK080.....	116	W8570TJ220.....	117
W0642WC240.....	114	W2830HE560.....	115	W4693QR050.....	116	W8570TJ220MBR.....	141
W0735RA120.....	118	W2830HE600.....	115	W4693QR080.....	116	W9830TE120.....	118
W0735RA150.....	118	W2865HA620.....	115	W4713HL300.....	117	W9830TE150.....	118
W0735SA120.....	118	W2865HA650.....	115	W4713HL350.....	117	W9830TJ120.....	118
W0735SA150.....	118	W2865HA680.....	115	W4713HM300.....	117	W9830TJ120MBR.....	141
W0790LG650.....	114	W2899MC460.....	115	W4713HM350.....	117	W9830TJ150.....	118
W0880LC620.....	114	W2899MC480.....	115	W4767MC180.....	117	W9830TJ150MBR.....	141
W0880LC650.....	114	W3082MC420.....	115	W4767MC220.....	117		
W0880LC680.....	114	W3082MC450.....	115	W5092ZC320.....	117	X	
W0925LG500.....	114	W3090HA520.....	115	W5092ZC350.....	117	XK0450BA019M.....	154
W0925LG560.....	114	W3090HA560.....	115	W5092ZD320.....	117	XK0450BA025M.....	154
W0925LG600.....	114	W3090HA600.....	115	W5092ZD350.....	117	XK0450DA056M.....	150
W0944WC120.....	114	W3128VC360.....	115	W5130MK240.....	117	XK0450DT056M.....	150
W0944WC150.....	114	W3128VC400.....	115	W5130MK280.....	117	XK0450SA056M.....	150
W1032LC500.....	114	W3128VF360.....	115	W5139TE450.....	117	XK0600DA074M.....	150
W1032LC560.....	114	W3128VF400.....	115	W5139TE480.....	117	XK0600SA074M.....	150
W1032LC600.....	114	W3270NC22A.....	115	W5139TJ450.....	117	XK0900DA056M.....	150
W1060LG420.....	114	W3270NC200.....	115	W5139TJ480.....	117	XK0900DT056M.....	150
W1060LG450.....	114	W3270NC220.....	115	W5282ZC240.....	117	XK0900SA056M.....	150
W1074YC200.....	114	W3455QK200.....	115	W5282ZC300.....	117	XK1000BA025M.....	154
W1074YC260.....	114	W3455QK220.....	115	W5282ZD240.....	117	XK1000DA074M.....	150
W1074YC320.....	114	W3477MC360.....	115	W5282ZD300.....	117	XK1000SA074M.....	150
W1074YH200.....	114	W3477MC400.....	115	W5334MK200.....	117	XK1100DA076M.....	150
W1074YH260.....	114	W3630TE650.....	115	W5334MK220.....	117	XK1130DA076M.....	150
W1074YH320.....	114	W3630TJ650.....	115	W5636MC120.....	117	XK1130DT076M.....	150
W1185LC420.....	114	W3697VC220.....	115	W5636MC150.....	117	XK1130SA076M.....	150
W1185LC450.....	114	W3697VC280.....	115	W5696VC100.....	117	XK1130SB076M.....	151
W1260LG320.....	114	W3697VF220.....	115	W5696VC140.....	117	XK1500BA034M.....	154
W1260LG360.....	114	W3697VF280.....	115	W5696VF100.....	117	XK1500CB034M.....	151
W1263YC160.....	114	W3708MC320.....	115	W5696VF140.....	117	XK1800DA076M.....	150
W1263YC220.....	114	W3708MC350.....	116	W5715ED520.....	117	XK1800DT076M.....	150
W1263YC250.....	114	W3743ZC400.....	116	W5715ED560.....	117	XK1800SA076M.....	150
W1263YH160.....	114	W3743ZC450.....	116	W5715ED600.....	117	XK2000DA114M.....	150
W1263YH200.....	114	W3743ZC500.....	116	W5838ZC180.....	117	XK2000SA114M.....	150
W1263YH250.....	115	W3743ZD400.....	116	W5838ZC220.....	117	XK2140DA076M.....	150
W1360LG240.....	115	W3743ZD450.....	116	W5838ZD180.....	117	XK2140DA076ML.....	150
W1360LG300.....	115	W3743ZD500.....	116	W5838ZD220.....	117	XK2140DT076M.....	150
W1748LC180.....	115	W3841VC300.....	116	W5984TE360.....	117	XK2140DT076ML.....	150
W1748LC250.....	115	W3841VC340.....	116	W5984TE400.....	117	XK2140SA076M.....	150
W1856NC400.....	115	W3841VF300.....	116	W5984TJ360.....	117	XK2140SA076ML.....	150
W1856NC500.....	115	W3841VF340.....	116	W5984TJ400.....	117	XK2140SB076M.....	151
W1975MC620.....	115	W3842MC28A.....	116	W6262ZC200.....	117	XK2500DA114M.....	150
W1975MC650.....	115	W3842MC240.....	116	W6262ZC240.....	117	XK2500DA116M.....	150
W1975MC680.....	115	W3842MC280.....	116	W6262ZD200.....	117	XK2500DA116ML.....	150
W2054NC420.....	115	W3864QK120.....	116	W6262ZD240.....	117	XK2500SA114M.....	150
W2054NC450.....	115	W3864QK150.....	116	W6360EC520.....	117	XK2500SA116M.....	151
W2058LC100.....	115	W3864QK180.....	116	W6360EC560.....	117	XK2500SA116ML.....	151
W2058LC120.....	115	W4096ZC420.....	116	W6360EC600.....	117	XK2700DA076M.....	150
W2058LC140.....	115	W4096ZC450.....	116	W6672TE320.....	117	XK2700DT076M.....	150
W2115MC520.....	115	W4096ZD420.....	116	W6672TE350.....	117	XK2700SA076M.....	150
W2115MC560.....	115	W4096ZD450.....	116	W6672TJ320.....	117	XK3000DA116M.....	151

Part Number Alphanumeric Index

XK3000DA116ML	151	XSL1100C2WRT	149
XK3000SA116M	151	XSNM12H10S	155
XK3000SA116ML	151	XSNM12H12S	155
XK3060DA140ML	151	XST1000M08P	149
XK3060SA140ML	151	XST1000M10P	149
XK3500DA116M	151	XST1000M12P	149
XK3500DA116ML	151	XST1000M16P	149
XK3500SA116M	151	XW076NC16A	155
XK3500SA116ML	151	XW076NC16B	155
XK4000DA116M	151	XW076NC16BS	155
XK4000DA116ML	151	XW076NC16BT	155
XK4000SA116M	151	XW076NC16C	155
XK4000SA116ML	151	XW076NC16CT	155
XK5000DA128M	151	XW076NC16R	155
XK5000DA128ML	151	XW076NC16W	155
XK6120DA180ML	151	XW116ZC20A	155
XK6120SA180ML	151	XW116ZC20B	155
XK7000DA128M	151	XW116ZC20C	155
XK7000DA128ML	151	XW116ZC20R	155
XK8000DA180ML	151	XW116ZC20W	155
XK8000SA180ML	151	XW127EA25A	155
XK9000DA160M	151	XW127EA25B	155
XK9000DA160ML	151	XW127EC25A	155
XK9000SA160M	151	XW127EC25B	155
XK9000SA160ML	151	XW160FC25A	155
XSF30xxxxAN	154	XW160FC25B	155
XSF46xxxxAN	154	XW180BA34E	155
XSFGAxxxxAN	154	XW180BA34F	155
XSFGxxxxAN	154	XW180GA34A	155
XSFHxxxxAN	154	XW180GA34B	155
XSFLPxxxxAN	154	XW180GC34A	155
XSFTBxxxxAN	154	XW180GC34B	155
XSFTCxxxxAN	154	XW270QA25A	155
XSFTxxxxAN	154		
XSK1500DA076038	154		
XSK1500DA076076	154		
XSK1500DA076101	154		
XSK2000DA076038	154		
XSK2000DA076076	154		
XSK2000DA076101	154		
XSK3000DA076038	154		
XSK3000DA076076	154		
XSK3000DA076101	154		
XSK3400DA076038	154		
XSK3400DA076076	154		
XSK3400DA076101	154		
XSK3800DA116M076	154		
XSK3800DA116M101	154		
XSK4400DA116M076	154		
XSK4400DA116M101	154		
XSK6000DA116M076	154		
XSK6000DA116M101	154		
XSL200D8WRC	149		
XSL200D8WRCP	149		
XSL220C2WRT	149		
XSL300C2WRP	149		
XSL300C2WS	149		
XSL350C2WRP	149		
XSL400C2WRP	149		
XSL500C2WRP	149		
XSL600C2WRP	149		
XSL1000C2WRP	149		
XSL1000C2WRT	149		



LOCAL RESOURCES FOR A GLOBAL MARKET

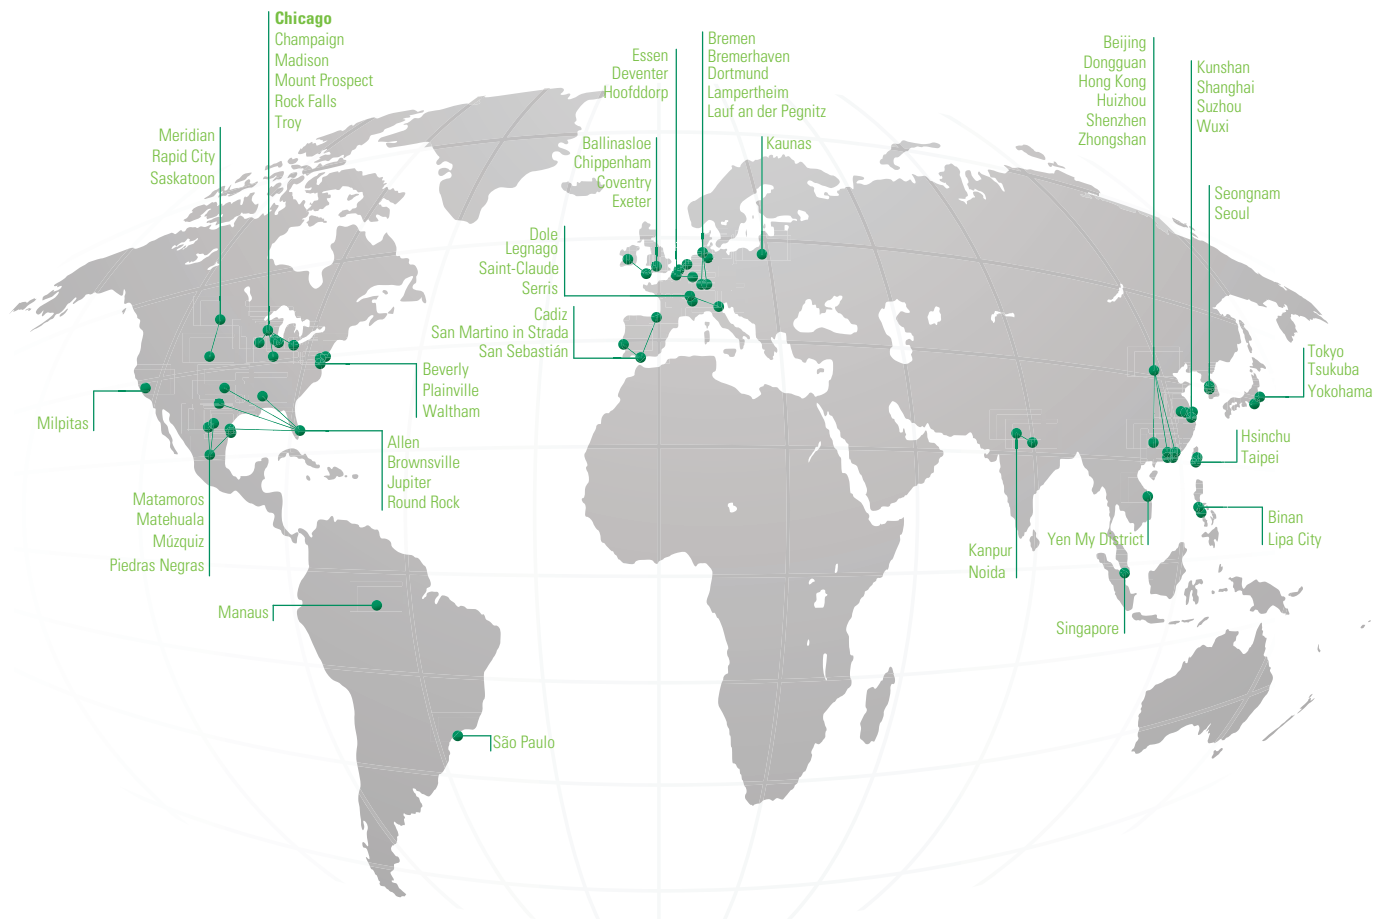

Disclaimer Notice: Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of each product selected and test them for their own applications. Littelfuse products are not designed for, and may not be used in, all applications.

Read the complete Disclaimer Notice at www.littelfuse.com/product-disclaimer.



Expertise Applied | Answers Delivered